


# 投光照明器具特性

品名(品番)	NNQ3 2084 BK+NTS9 1020	
光源	LED2700_70_799 ×1	799.0 lm
管理番号	K0160409(0)DJ1 XY	


配光の区分・種類	非対称配光	主ビ-ム効率	%			
器具点灯角度		ビ-ム範囲	$I_0 / 2$	$I_0 / 10$	$I_0 / 20$	
器具効率	100.0 %	ビ-ム効率	44.9%	85.2%	92.9%	
最大光度	1593 cd/1000 lm	ビ-ム角	AA' 26.4 BB' 60.9	60.8 101.3	80.6 114.2	

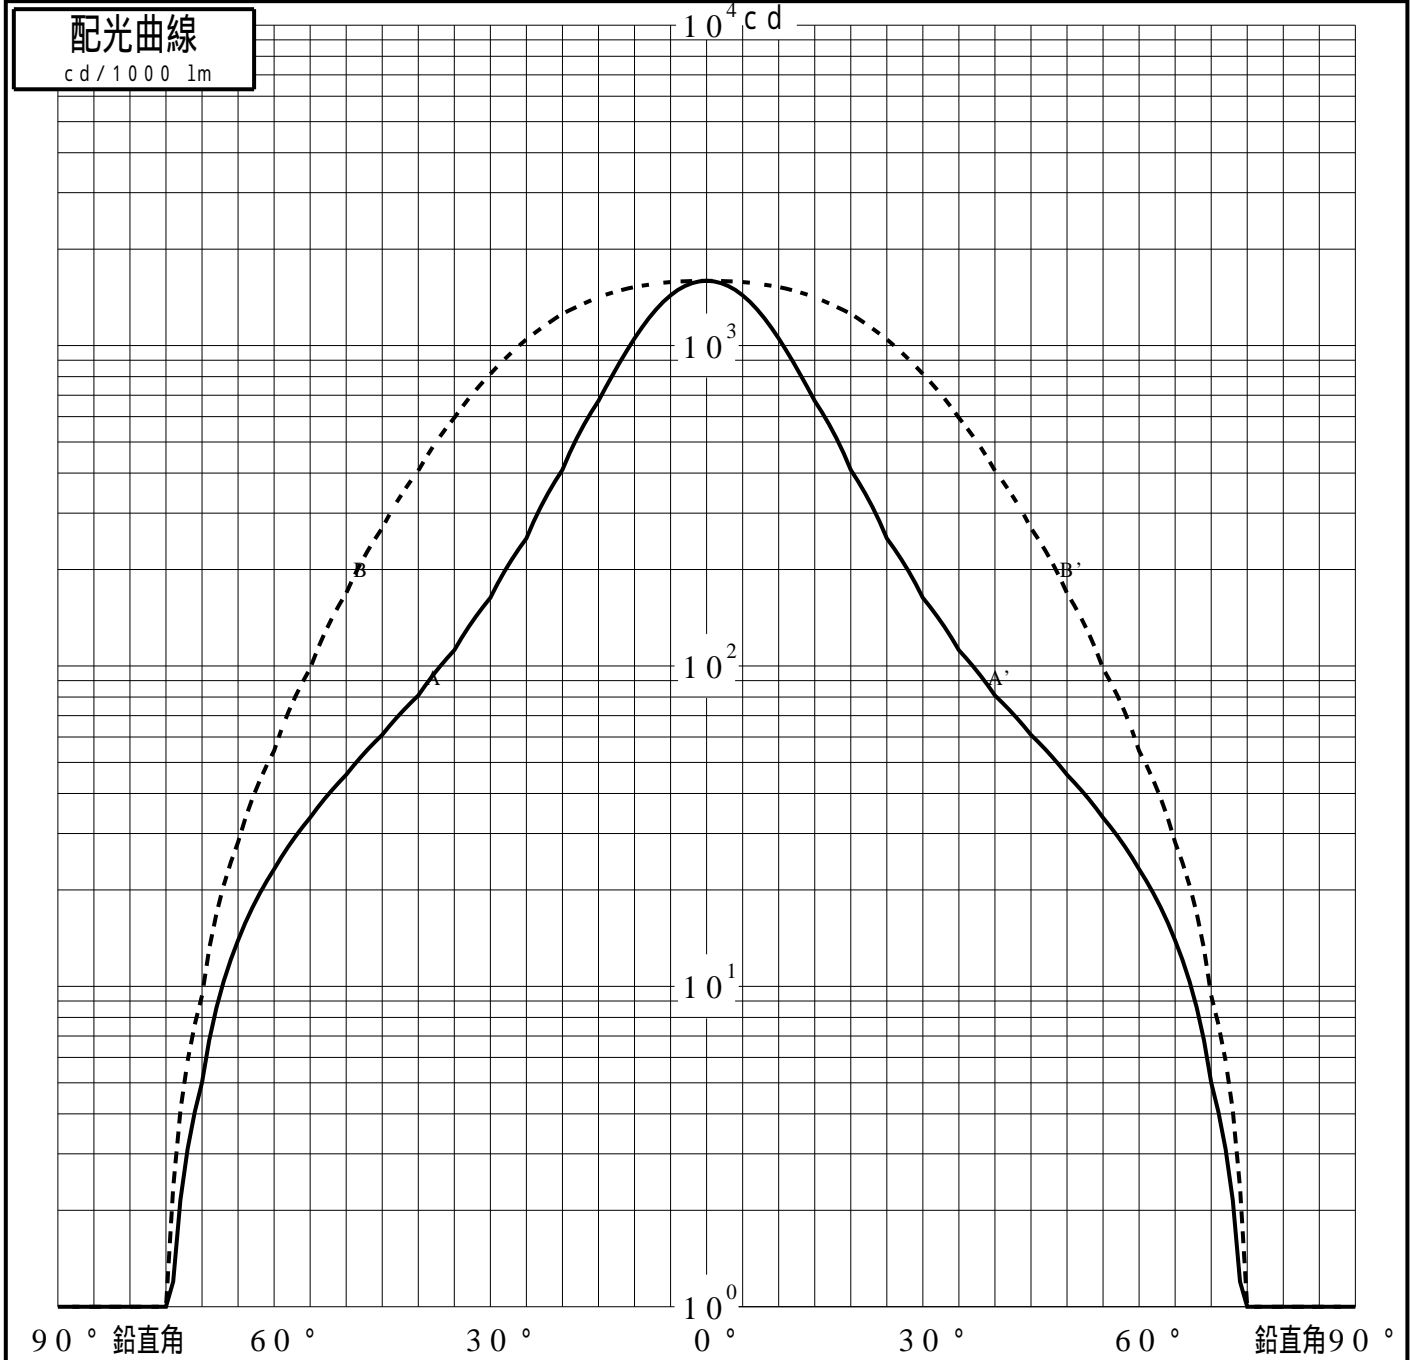

# 投光照明器具特性

品番 (品名)	NNQ32084BK+NTS91020	光源	LED2700_70_799 ×1
管理番号	K0160409(0)DJ1 XY		

## 累積光束曲線

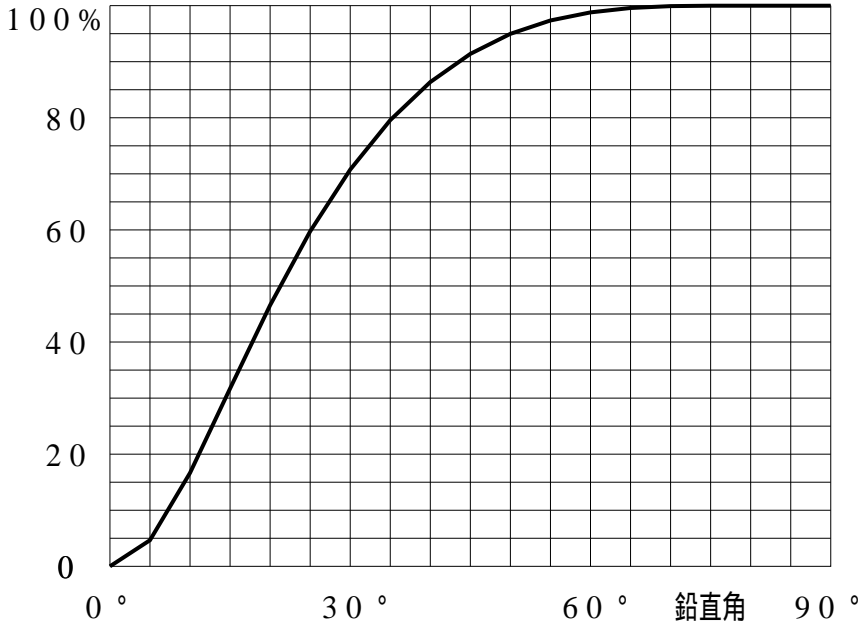

## 等光度曲線

(座標系)  
cd/1000 lm

