


# 投光照明器具特性



品名(品番)	NNQ3 2092 WK+ NK3 3155 W					
光源	LED3500_70_660 ×1 660.0 lm					
管理番号	K0160411(0)DJ1 TF					
配光の区分・種類	軸対称配光 中角形	主ビ-ム効率	87.6 %			
器具点灯角度		ビ-ム範囲	$I_0 / 2$	$I_0 / 10$	$I_0 / 20$	
器具効率	100.0 %	ビ-ム効率	54.9%	87.5%	93.8%	
最大光度	2574 cd/1000 lm	ビ-ム角	34.3	59.9	71.6	

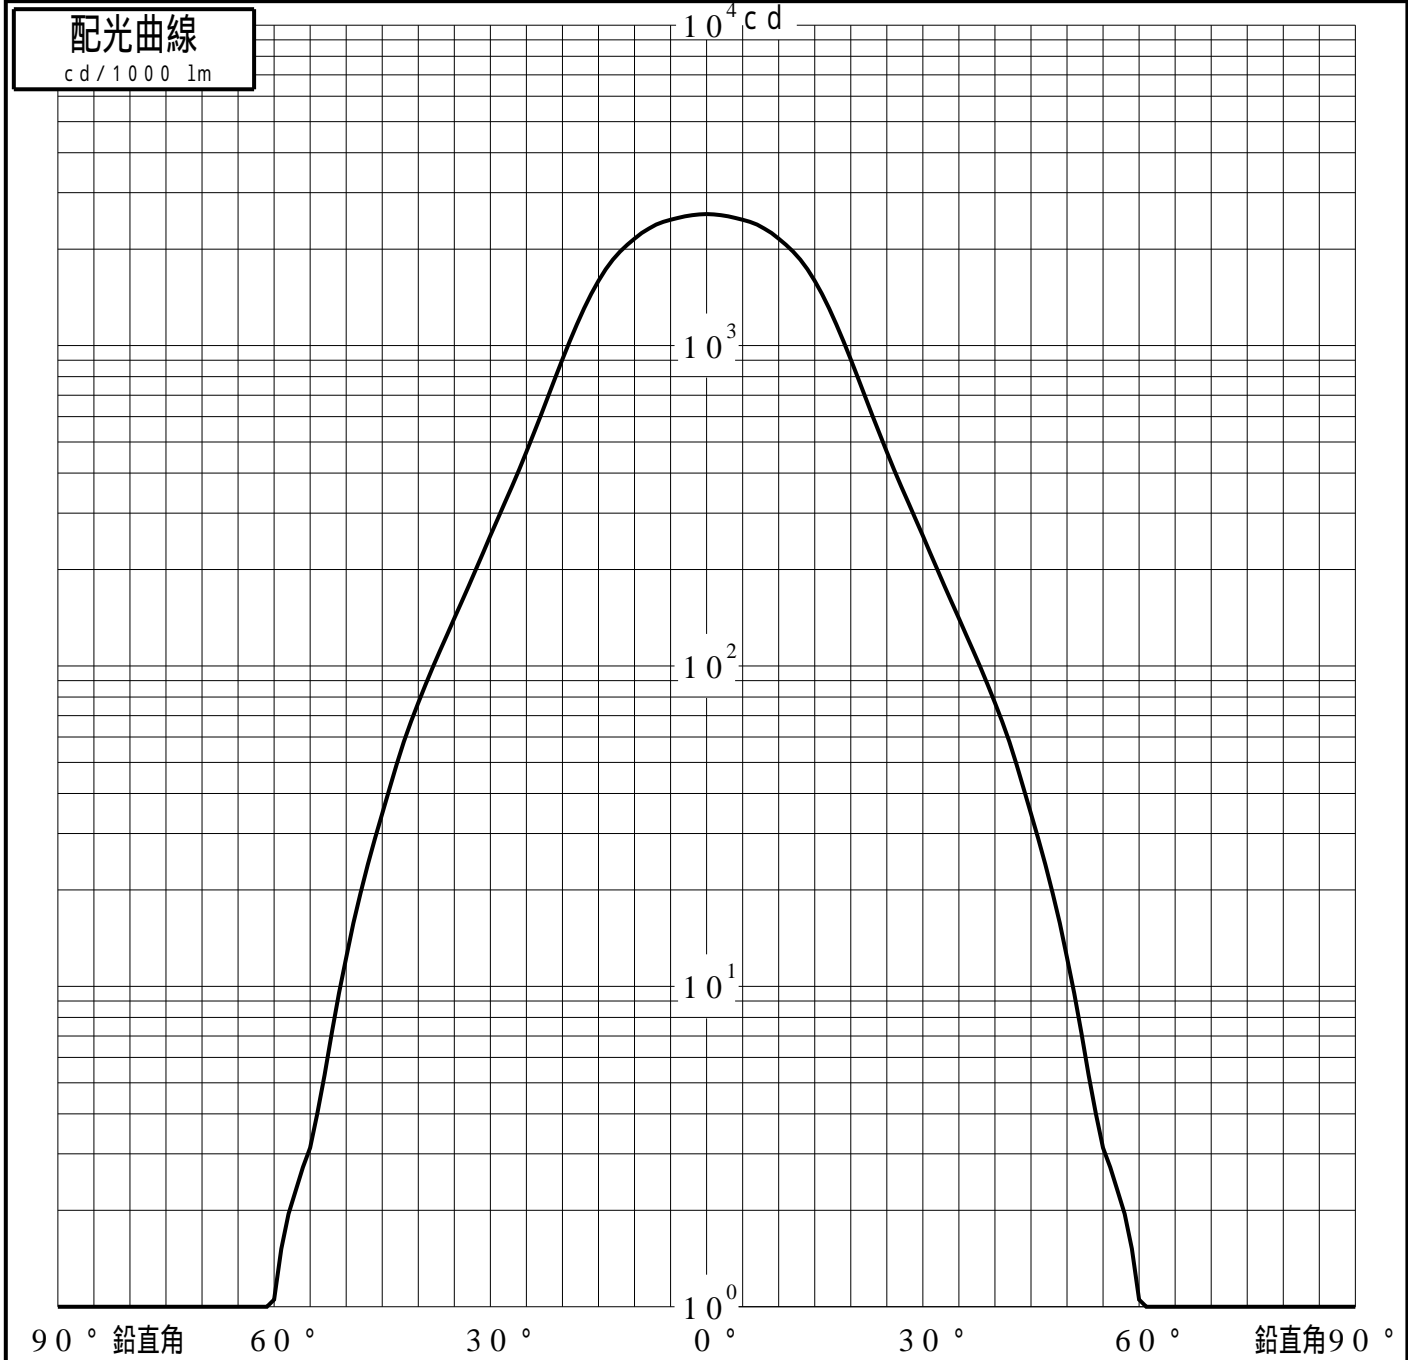

# 投光照明器具特性


品番(品名)	NNQ32092WK+NK33155W	光源	LED3500_70_660 ×1
管理番号	K0160411(0)DJ1 TF		

## 累積光束曲線

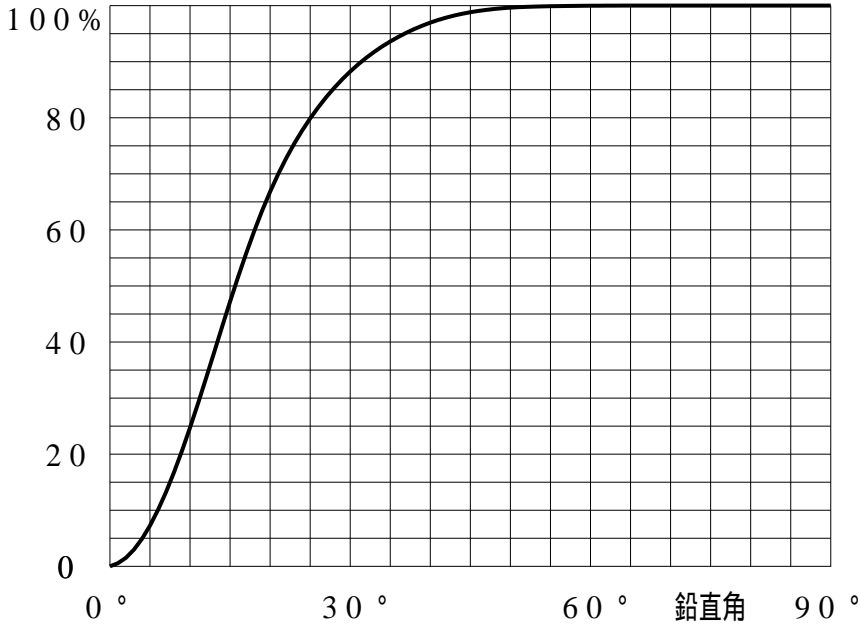

## 等光度曲線

(座標系)  
cd/1000 lm

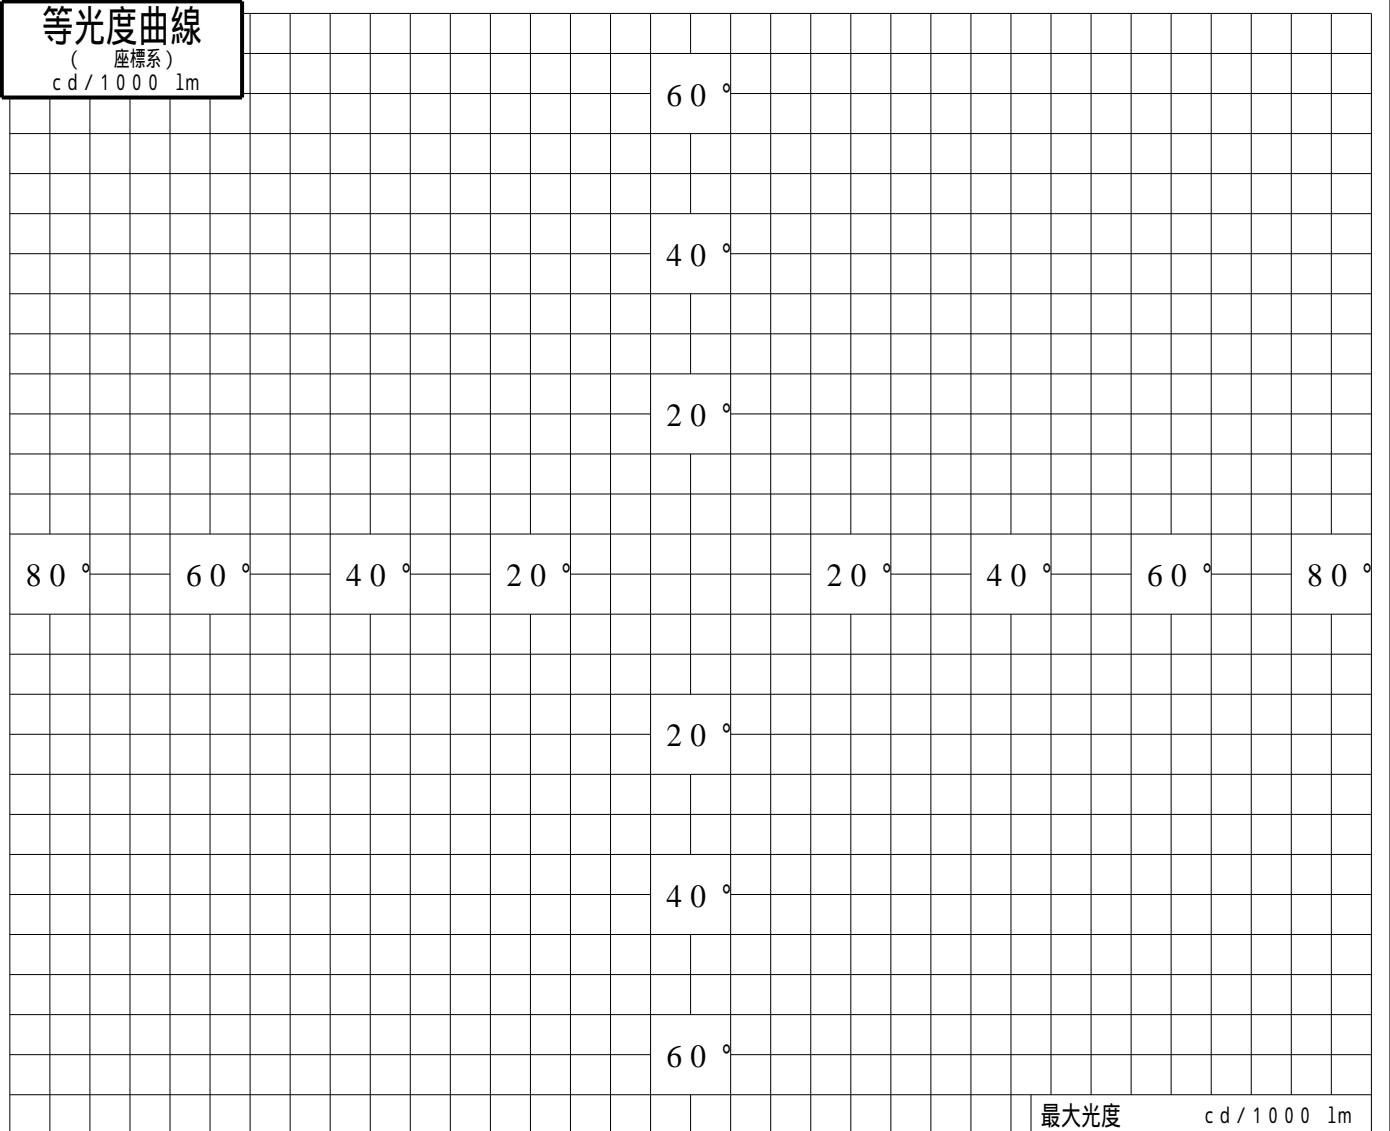

最大光度 cd/1000 lm