
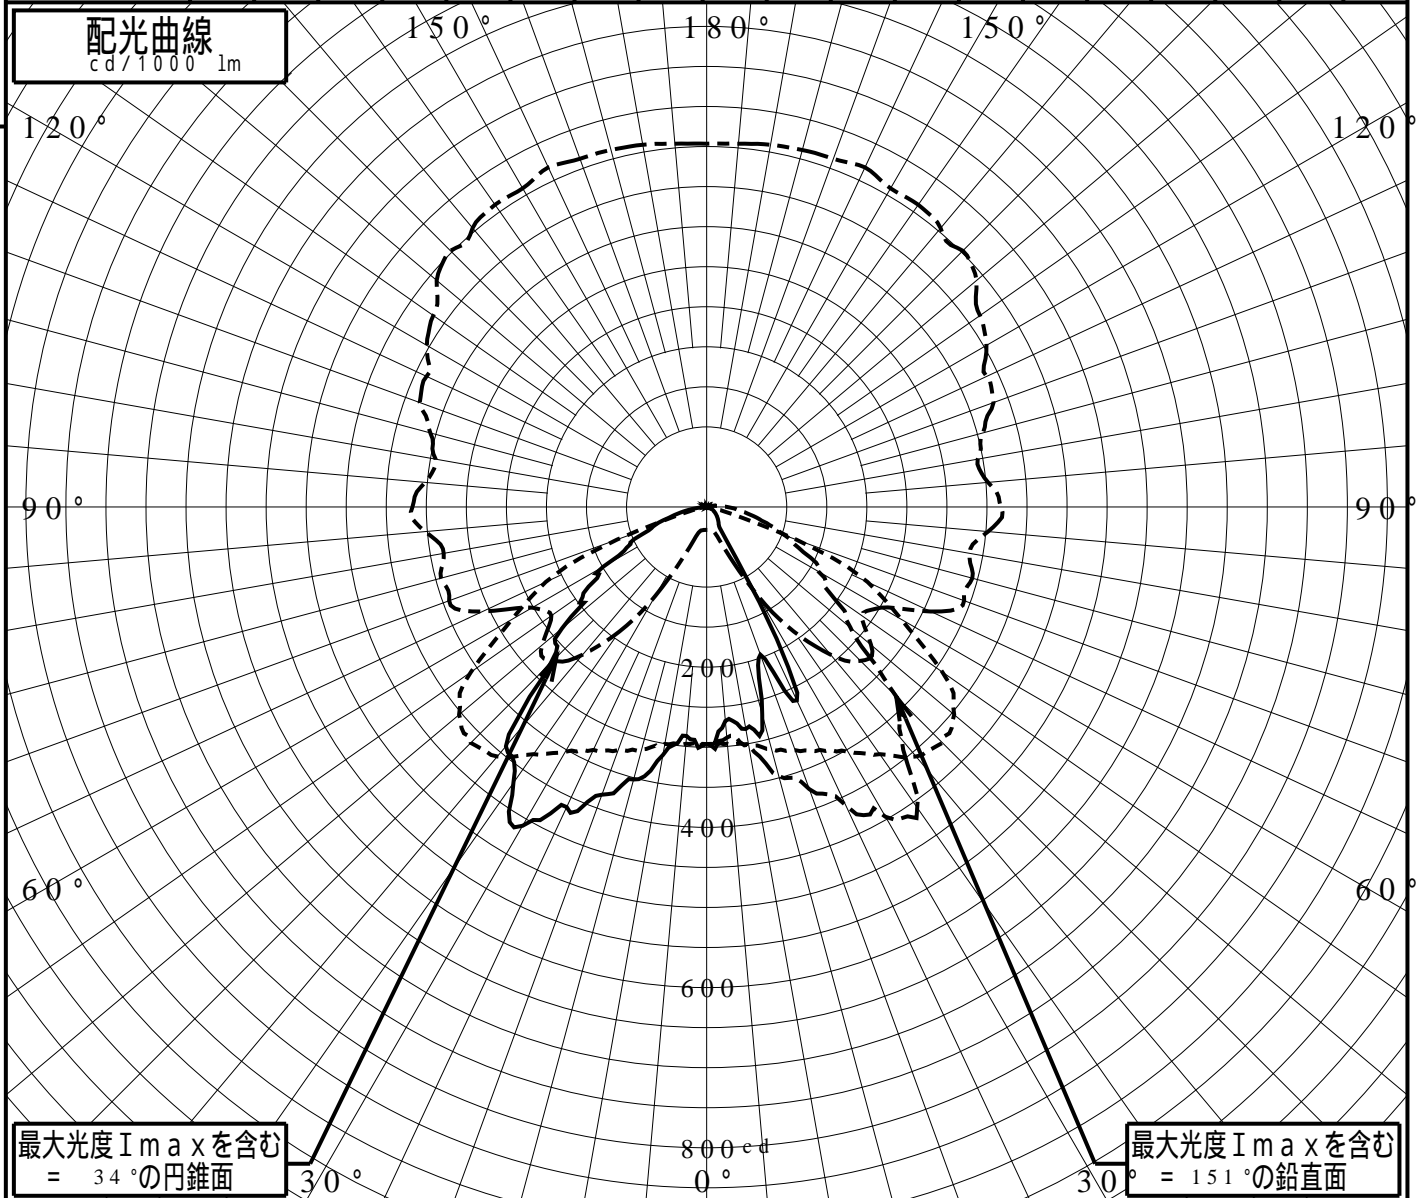


屋外照明器具特性

| | | | | | | | | | | | | | | | | | | | |
|--------------------------|-------------------------------|------|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 品番(品名) | NNY27818Z+NNY28633*2_0DE | | | | | | | | | | | | | | | | | | |
| 光源 | LED5000_80_11880 x1 11880.0lm | | | | | | | | | | | | | | | | | | |
| 管理番号 | K0145132(4)DB1 | | | | | | | | | | | | | | | | | | |
| JISC8131-1999 による配光形式 | CUT-OFF | | | | | | | | | | | | | | | | | | |
| 器具効率 | 99.9% | 直下光度 | 296.0 cd/1000lm | | | | | | | | | | | | | | | | |
| 上方光束 | 1.3% | 最大光度 | 468.5 cd/1000lm | | | | | | | | | | | | | | | | |
| 下方光束 | 98.6% | | | | | | | | | | | | | | | | | | |
| 鉛直角 | 0° | 5° | 10° | 15° | 20° | 25° | 30° | 35° | 40° | 45° | 50° | 55° | 60° | 65° | 70° | 75° | 80° | 85° | 90° |
| =0°鉛直面 | 295 | 268 | 281 | 268 | 196 | 266 | 73 | 26 | 22 | 19 | 16 | 13 | 10 | 8 | 6 | 4 | 3 | 1 | 0 |
| 90° | 295 | 296 | 300 | 313 | 323 | 334 | 352 | 376 | 406 | 416 | 403 | 359 | 280 | 221 | 118 | 28 | 8 | 2 | 0 |
| 180° | 295 | 287 | 314 | 352 | 382 | 413 | 459 | 420 | 389 | 274 | 235 | 187 | 149 | 104 | 71 | 44 | 25 | 7 | 0 |
| 270° | 295 | 296 | 300 | 313 | 323 | 334 | 352 | 376 | 406 | 416 | 403 | 359 | 280 | 221 | 118 | 28 | 8 | 2 | 0 |
| I _{max} を含む鉛直面 | 295 | 289 | 301 | 347 | 374 | 410 | 446 | 458 | 379 | 334 | 234 | 188 | 161 | 133 | 104 | 77 | 54 | 38 | 25 |

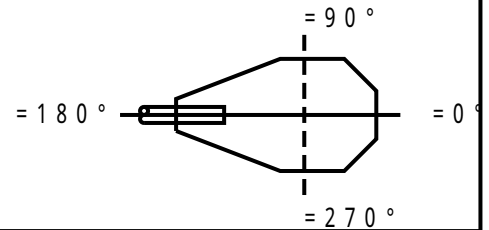

道路・トンネル照明率曲線

品番(品名)

NNY27818Z+NNY28633*2_0DE

光源

LED5000_80_11880 x1


管理番号

K0145132 (4)DB 1

————— = 0.0°

H: 取付高さ(MOUNTING HEIGHT)

| 照明率(= 0°) | | |
|------------|-------|-------|
| 幅 | 歩道側 | 車道側 |
| 0.0H | 0.000 | 0.000 |
| 0.2H | 0.117 | 0.115 |
| 0.4H | 0.238 | 0.207 |
| 0.6H | 0.357 | 0.276 |
| 0.8H | 0.448 | 0.291 |
| 1.0H | 0.508 | 0.299 |
| 1.2H | 0.544 | 0.304 |
| 1.4H | 0.568 | 0.307 |
| 1.6H | 0.585 | 0.309 |
| 1.8H | 0.598 | 0.311 |
| 2.0H | 0.608 | 0.312 |
| 2.2H | 0.615 | 0.313 |
| 2.4H | 0.621 | 0.313 |
| 2.6H | 0.626 | 0.314 |
| 2.8H | 0.629 | 0.314 |
| 3.0H | 0.632 | 0.314 |
| 3.2H | 0.635 | 0.315 |
| 3.4H | 0.637 | 0.315 |
| 3.6H | 0.639 | 0.315 |

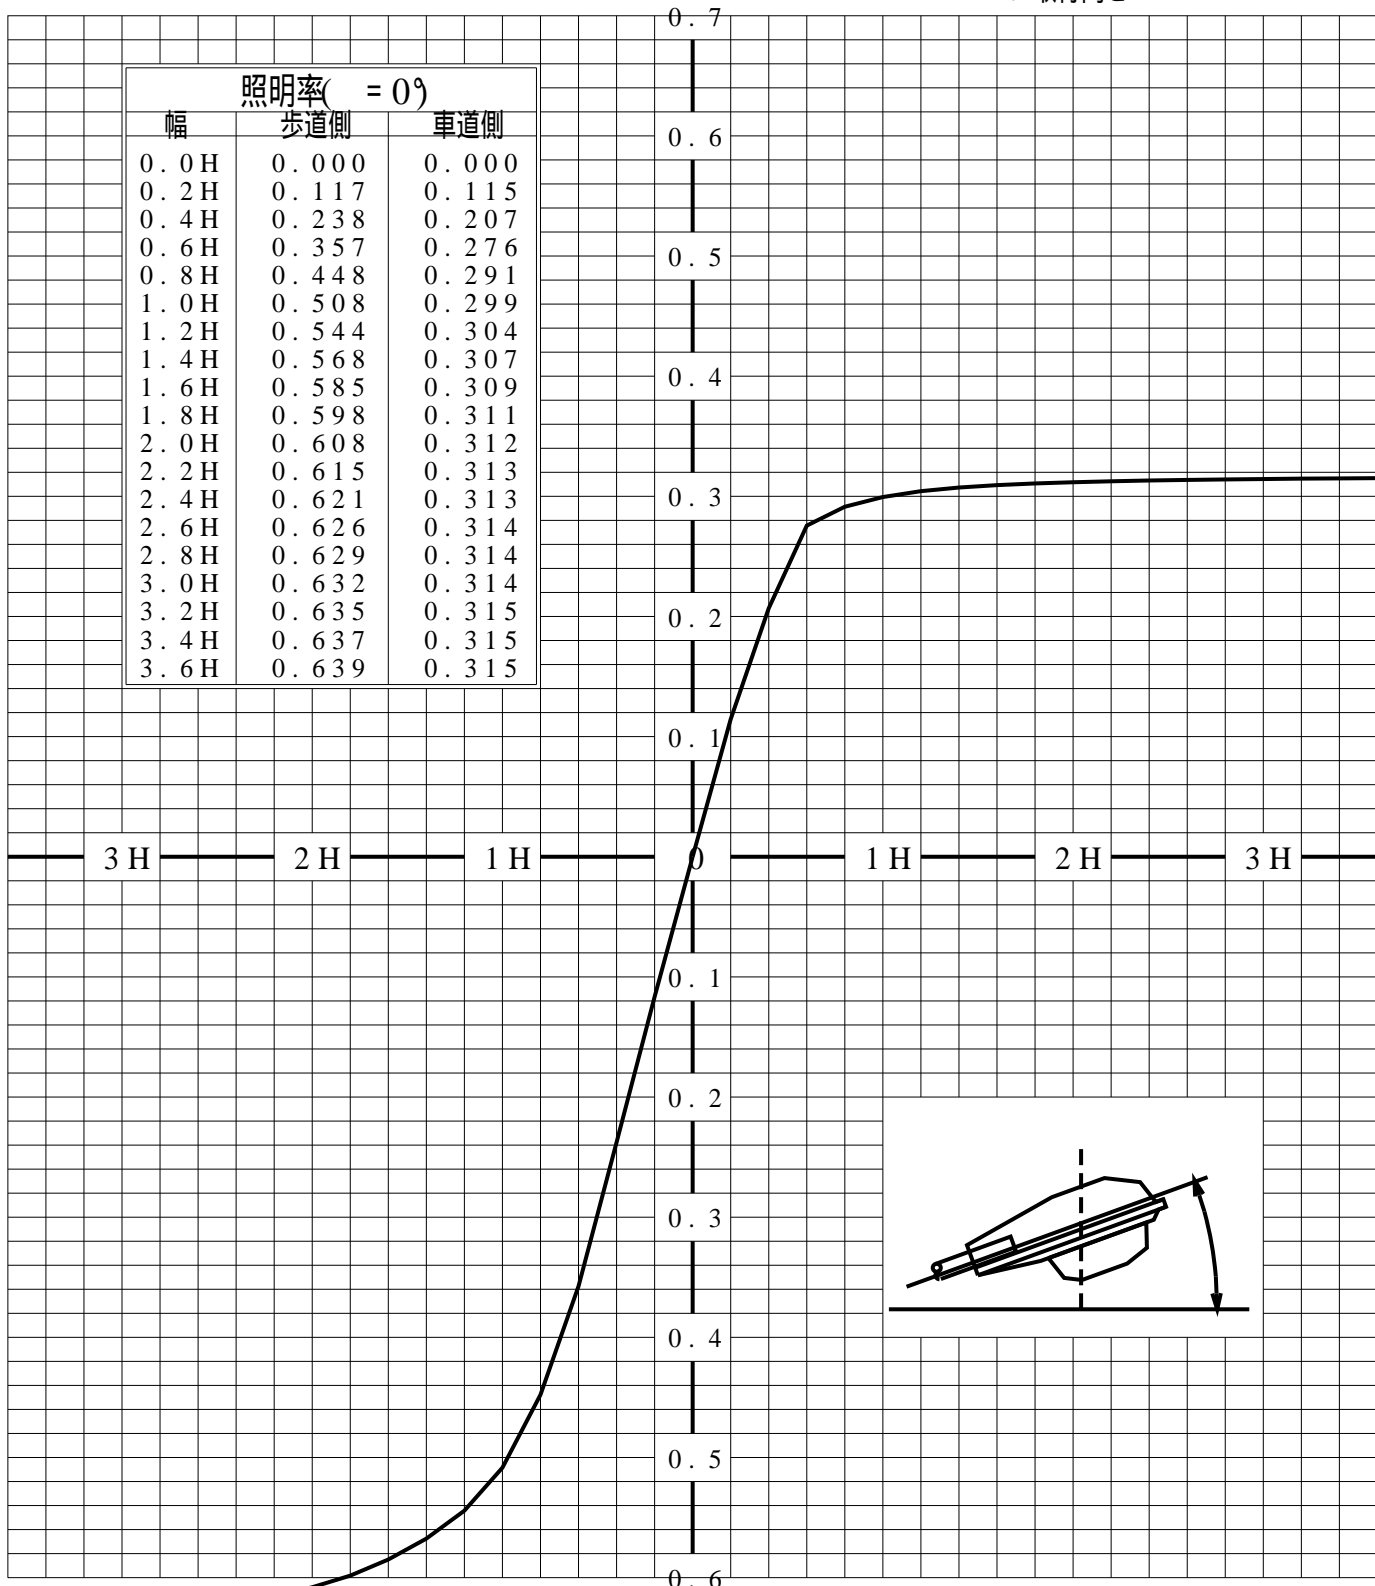

歩道側



車道側

正弦等光度曲線

| | | | |
|---------|--------------------------|----|---------------------|
| 品番 (品名) | NNY27818Z+NNY28633*2_0DE | 光源 | LED5000_80_11880 x1 |
| 管理番号 | K0145132(4)DB 1 | | |

