

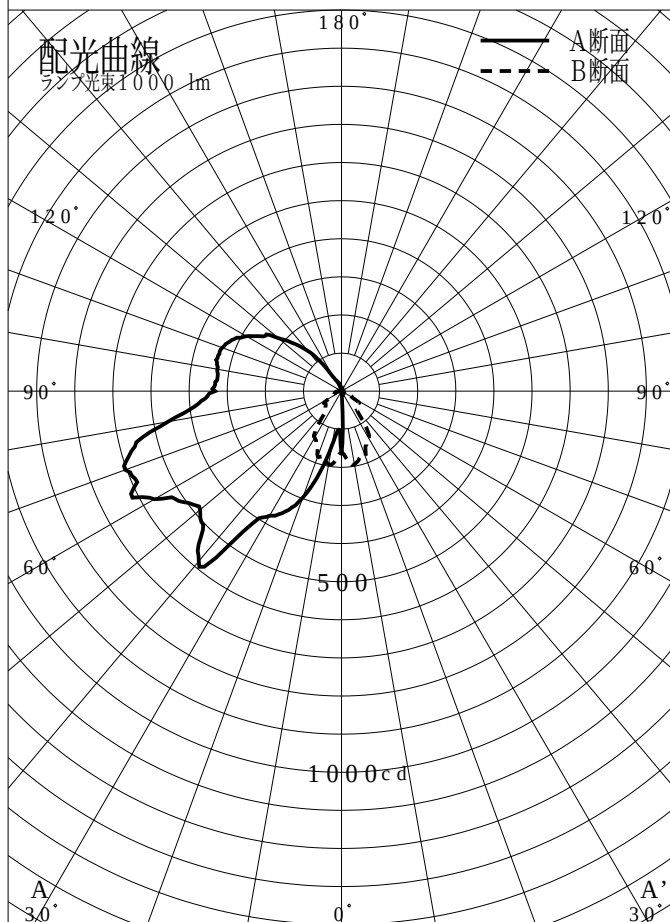


非常用照明器具特性

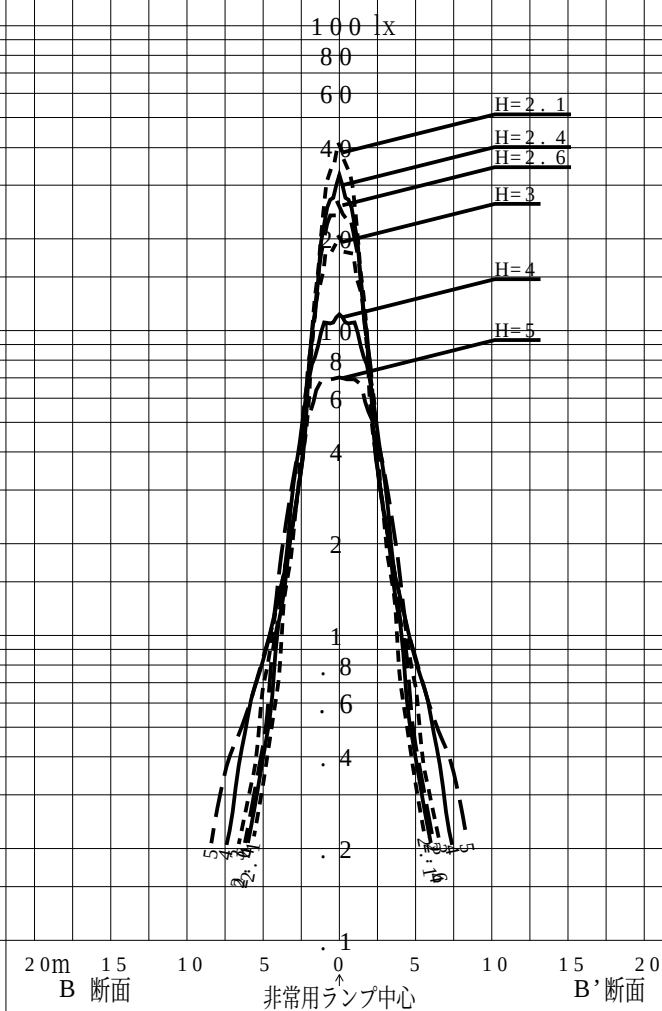

品番	NNCF 2 1 6 3 5 (WALL)		
名称			
光源	LED5000 / 97 / 435		
管理番号	K0185272(0) DB1		
光束	870lm x 1.00		
保守率	0.92		
適用品番	設計照度Eを得るための読取照度		
	E = 2.0	E = 1.0	E = 0.5
NNCF21635(WALL)	2.5	1.2	0.6
備考	非常点灯時の照度 (60 分後)		

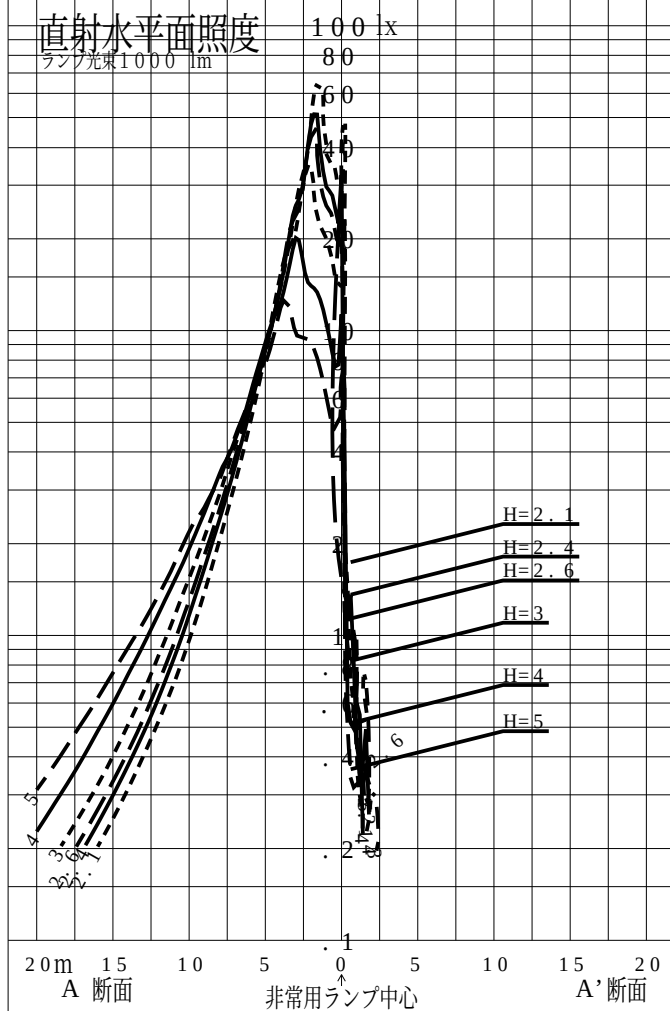

品番	NNCF 2 1 6 3 5 (WALL)				
名称					
光源	LED5 0 0 0 / 9 7 / 4 3 5				
管理番号	K0 1 8 5 2 7 2 (0) DB 1				
光束	8 7 0 . 0 l m * 1 . 0 0			備考	非常点灯時の照度 (6 0 分後)
保守率	0 . 9 2				

非常灯配置表

器具取付高さ (m)																
単体配置																
直線配置																
四角配置																
壁からの距離 (最大)																

器具取付高さ (m)																
単体配置																
直線配置																
四角配置																
壁からの距離 (最大)																

器具取付高さ (m)																
単体配置																
直線配置																
四角配置																
壁からの距離 (最大)																

階段配置表

器具取付高さ (m)			1 . 0	1 . 5	2 . 0	2 . 5	3 . 0	4 . 0	5 . 0	6 . 0	7 . 0	
Y= 1 . 0 (m)	2 . 0 L x	X+	5 . 5	6 . 5	7 . 3	7 . 9	8 . 4	9 . 0	9 . 3	9 . 1	0 . 2	
		X-	0 . 1	0 . 1	0 . 1	0 . 1	0 . 1	0 . 2	0 . 2	0 . 2	0 . 1	
	1 . 0 L x	X+	6 . 9	8 . 0	9 . 1	9 . 9	10 . 7	11 . 8	12 . 4	12 . 9	13 . 2	
Y= 1 . 5 (m)	2 . 0 L x	X+	5 . 2	6 . 2	7 . 1	7 . 8	8 . 4	9 . 0	9 . 3	9 . 1	0 . 2	
		X-	0 . 1	0 . 1	0 . 1	0 . 1	0 . 1	0 . 2	0 . 2	0 . 2	0 . 1	
	1 . 0 L x	X+	6 . 7	8 . 0	8 . 9	9 . 8	10 . 6	11 . 8	12 . 4	12 . 9	13 . 2	
Y= 2 . 0 (m)	2 . 0 L x	X+	4 . 7	6 . 0	6 . 9	7 . 6	8 . 3	9 . 0	9 . 2	8 . 3	0 . 2	
		X-	0 . 0	0 . 1	0 . 1	0 . 1	0 . 1	0 . 2	0 . 2	0 . 2	0 . 1	
	1 . 0 L x	X+	6 . 4	7 . 7	8 . 7	9 . 5	10 . 3	11 . 7	12 . 4	12 . 9	13 . 2	