

投光照明器具特性

品名(品番)	NYY65923+NYY91300S+NTS90	
光源	LED3000_70_2350 x1	2350.0 lm
管理番号	K0165053(0)DJ1 XY	


配光の区分・種類	非対称配光	主ビ-ム効率	%		
器具点灯角度		ビ-ム範囲	$I_0 / 2$	$I_0 / 10$	$I_0 / 20$
器具効率	100.0 %	ビ-ム効率	61.9%	93.1%	96.4%
最大光度	2490 cd/1000 lm	ビ-ム角	AA' 21.6 BB' 57.9	43.0 81.1	48.9 88.0



投光照明器具特性

品番(品名)	NY Y65923+NY Y91300S+NTS90	光源	LED3000_70_2350 ×1
管理番号	K0165053(0)DJ1 XY		

累積光束曲線

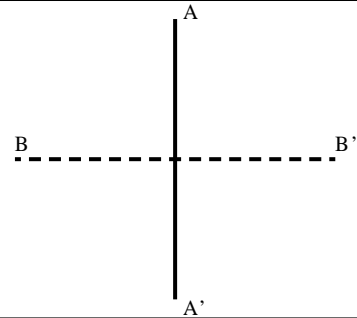

等光度曲線

(座標系)
cd/1000 lm

