


屋内照明器具特性

品番（品名）		NNLK42742+NNL4602NN																				
光源		LED5000_85_6370 ×1 6370.0 lm																				
管理番号		K0129806（2）DB1																				
BZ分類		BZ5																				
器具効率 上方光束 下方光束		100 % 2 % 98 %	反射率	天井	80 %				70 %				50 %				30 %				0 %	
				壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	0 %	
				床	10 %				10 %				10 %				10 %				0 %	
			室指数		照明率（ X0.01）																	
保守率		良 中 否 0.83 0.81 0.77	0.6	55	42	34	29	53	42	34	29	51	40	33	28	48	39	33	28	26		
			0.8	65	53	44	39	63	52	44	38	60	50	43	38	57	49	42	38	35		
			1.0	71	60	52	46	69	59	51	46	66	57	50	45	63	55	49	45	42		
			1.25	77	67	59	53	75	66	58	53	72	64	57	52	69	62	56	51	49		
下方投影面積 等価発光面積		cm ² cm ²	1.5	81	72	65	59	79	71	64	58	76	68	62	57	73	66	61	57	54		
			2.0	87	79	72	67	85	78	72	66	82	75	70	65	78	73	68	64	62		
取付高さ		器具間隔最大限 横方向（A） 縦方向（B）		2.5	91	84	78	73	89	82	77	72	85	80	75	71	82	77	73	70	67	
				3.0	93	87	82	77	91	86	81	76	88	83	79	75	85	81	77	74	71	
1.5m		2.02 m	2.2 m	4.0	97	92	87	83	95	90	86	82	91	88	84	81	88	85	82	79	76	
2		2.67	2.79	5.0	99	94	91	87	97	93	90	86	94	90	87	85	91	88	85	83	80	
2.5		3.32	3.39	7.0	101	98	95	92	99	96	94	91	96	94	91	89	93	91	89	87	84	
3		3.97	4.01	10.0	103	101	98	96	101	99	97	95	98	96	95	93	95	94	92	91	88	

配光曲線

ラング光束1000 lm

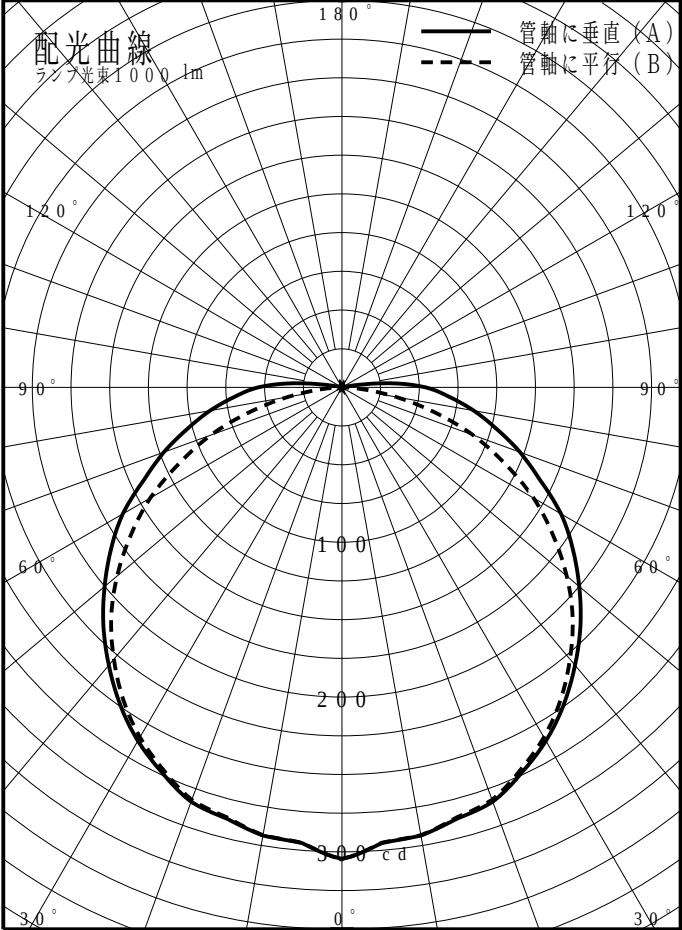

直射水平面照度

ラング光束1000 lm

