
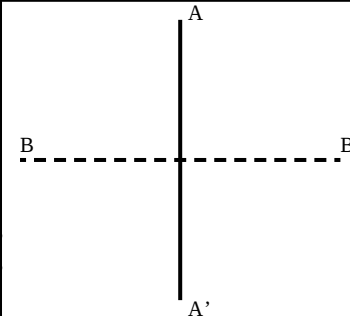


投光照明器具特性					
品名（品番）	NNQ3 2 0 9 7 W+ NTS 9 1 0 2 0				
光源	LED3500_70_1066 ×1 1066.0 lm				
管理番号	K0160413(0)DJ1 XY				



配光の区分・種類	非対称配光	主ビ - ム効率	%			
器具点灯角度		ビ - ム範囲	I ₀ / 2	I ₀ / 10	I ₀ / 20	
器具効率	100.0 %	ビ - ム効率	52.4%	90.8%	96.9%	
最大光度	1085 cd/1000 lm	ビ - ム角 AA' 38.3° BB' 70.0°	70.0	110.6	123.1	

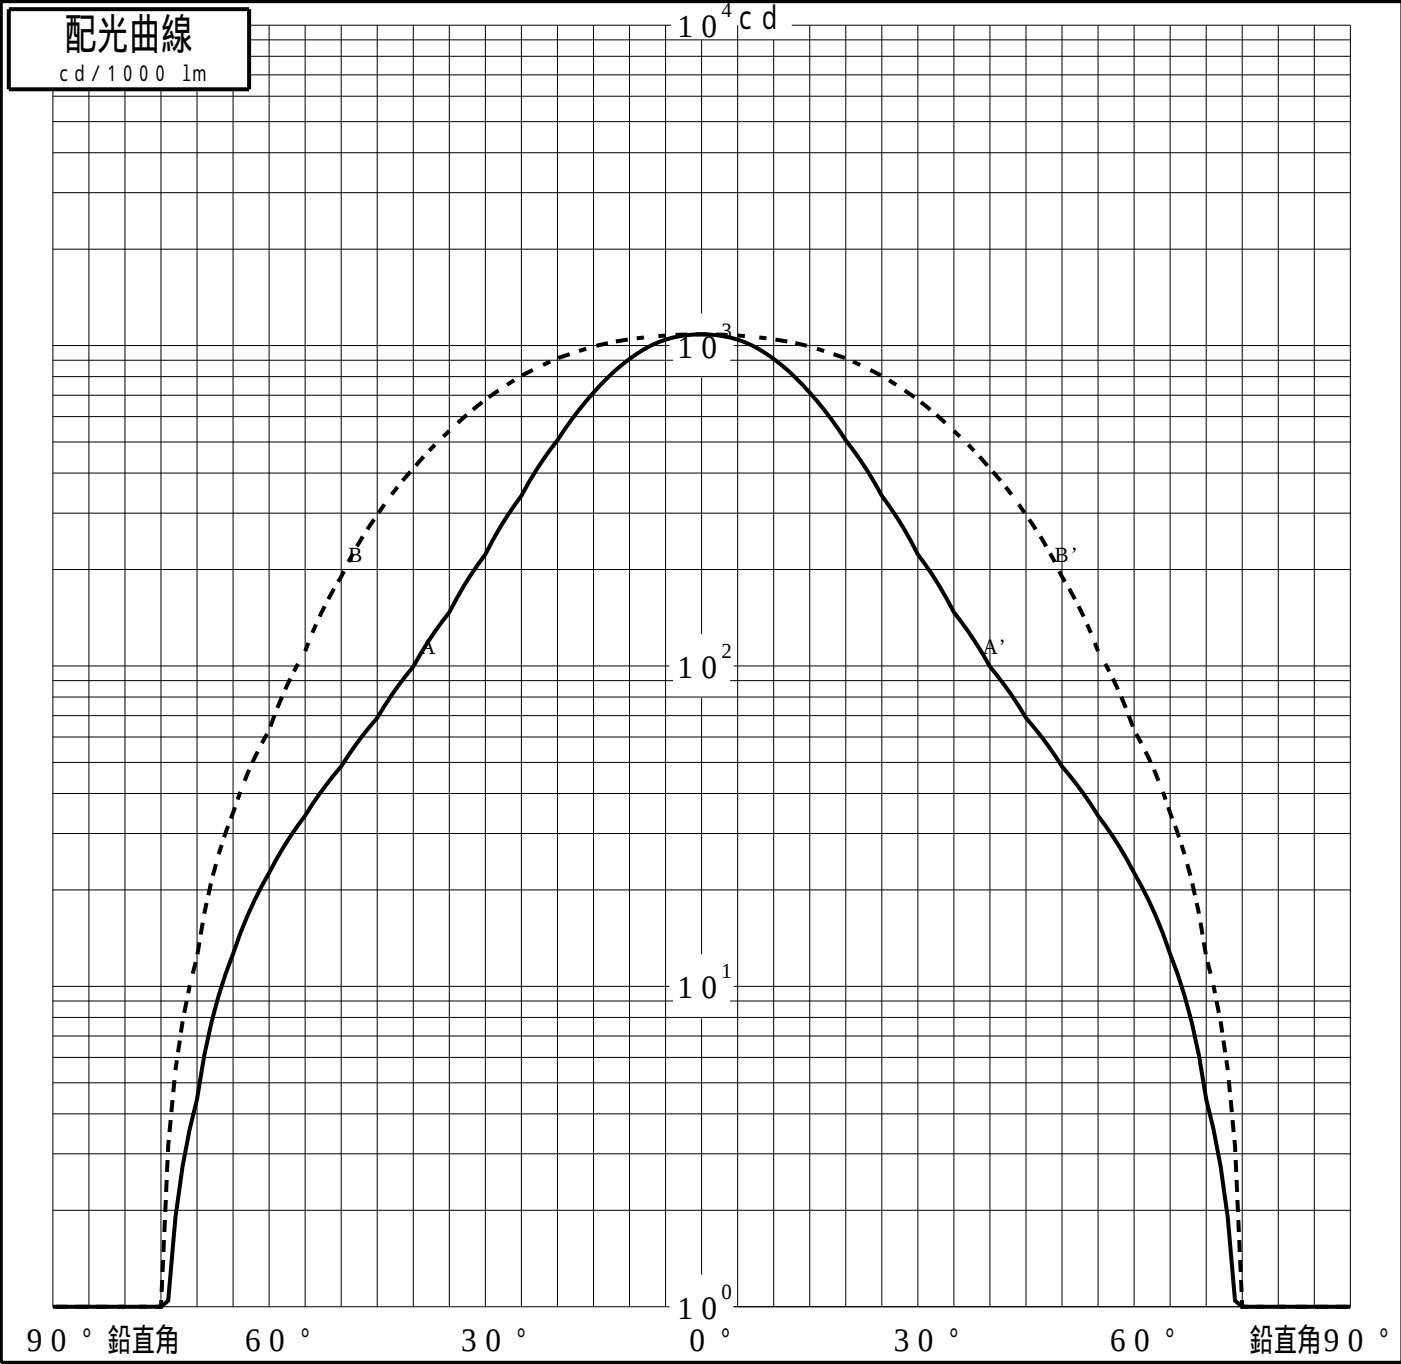

投光照明器具特性

品番 (品名)	NNQ32097W+NTS91020	光源	LED3500_70_1066 ×1
管理番号	K0160413(0)DJ1 XY		

累積光束曲線

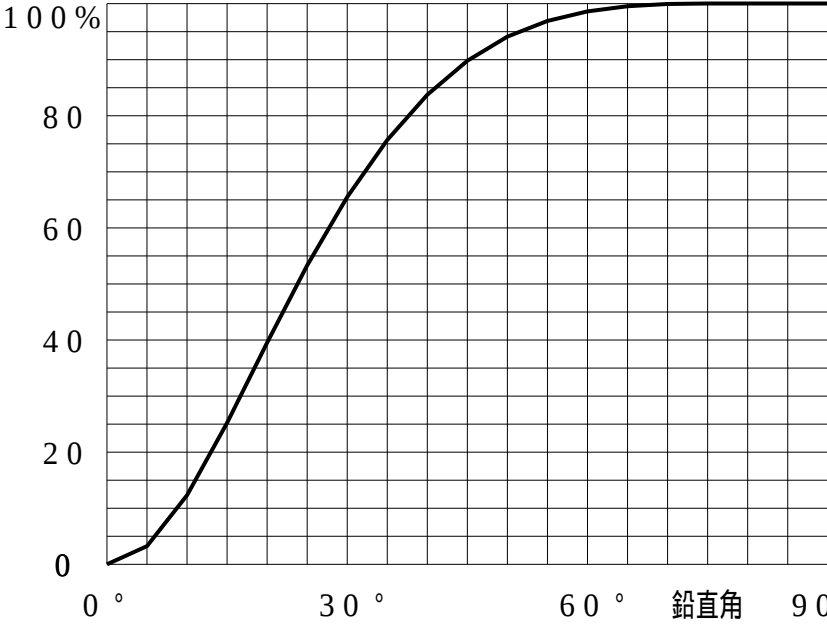

等光度曲線

(αβ座標系)
cd/1000 lm

