


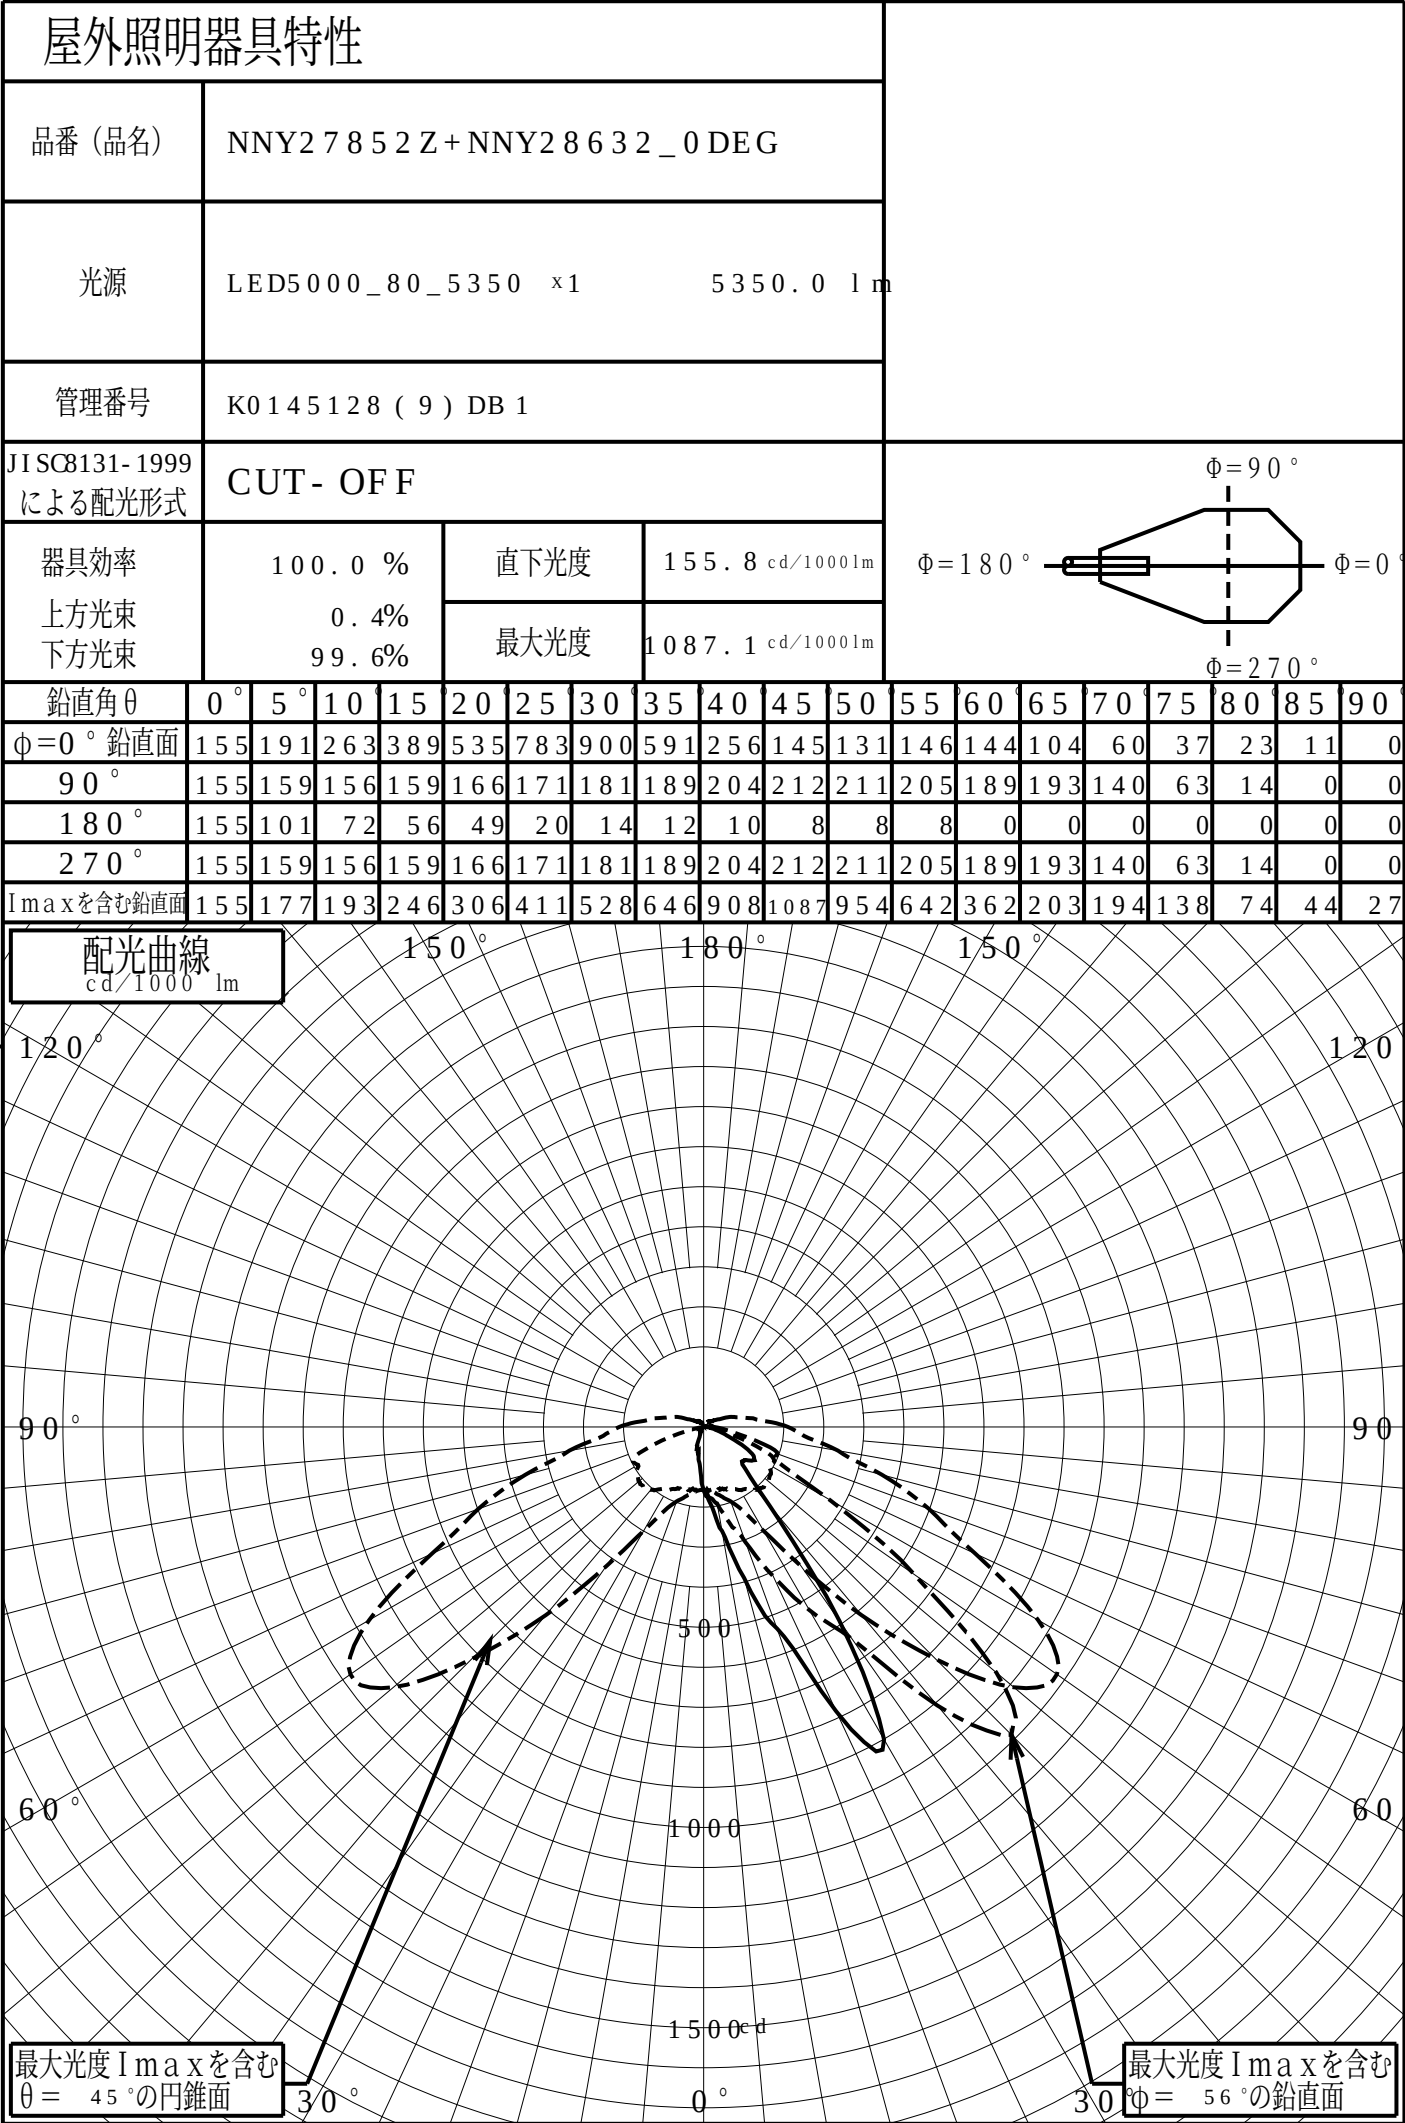

道路・トンネル照明率曲線

品番 (品名)

NNY27852Z+NNY28632_0 DEG

光源

LED5000_80_5350 ×1


管理番号

K0145128 (9)DB 1

$\alpha = 0.0^\circ$

H: 取付高さ (MOUNTING HEIGHT)

照明率 ($\alpha = 0^\circ$)		
幅	歩道側	車道側
0.0H	0.000	0.000
0.2H	0.045	0.086
0.4H	0.069	0.256
0.6H	0.078	0.520
0.8H	0.083	0.700
1.0H	0.086	0.764
1.2H	0.089	0.794
1.4H	0.090	0.816
1.6H	0.091	0.835
1.8H	0.091	0.850
2.0H	0.092	0.862
2.2H	0.092	0.870
2.4H	0.093	0.877
2.6H	0.093	0.881
2.8H	0.093	0.884
3.0H	0.093	0.887
3.2H	0.093	0.889
3.4H	0.093	0.891
3.6H	0.093	0.892

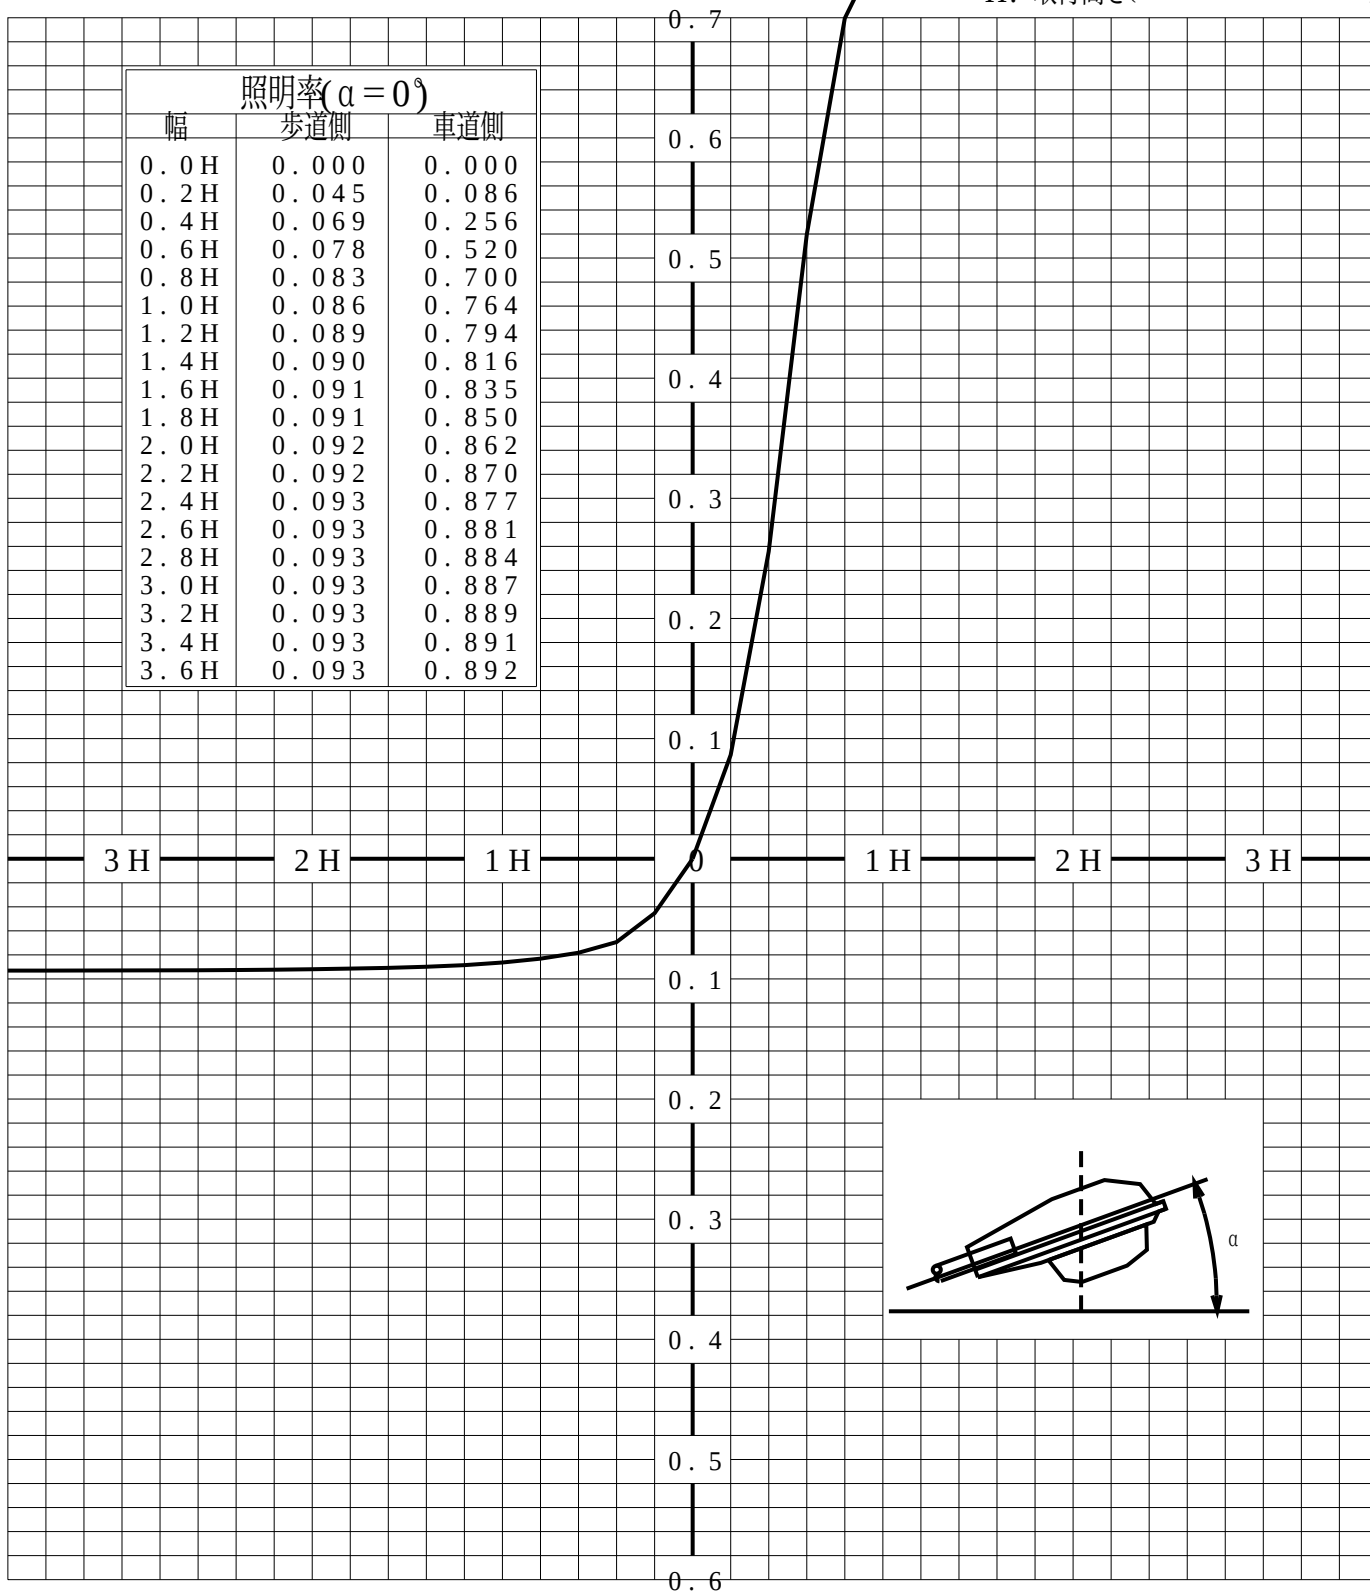

歩道側



車道側

正弦等光度曲線

品番 (品名)	NNY27852Z+NNY28632_0DEG	光源	LED5000_80_5350 x1
管理番号	K0145128 (9)DB 1		

