
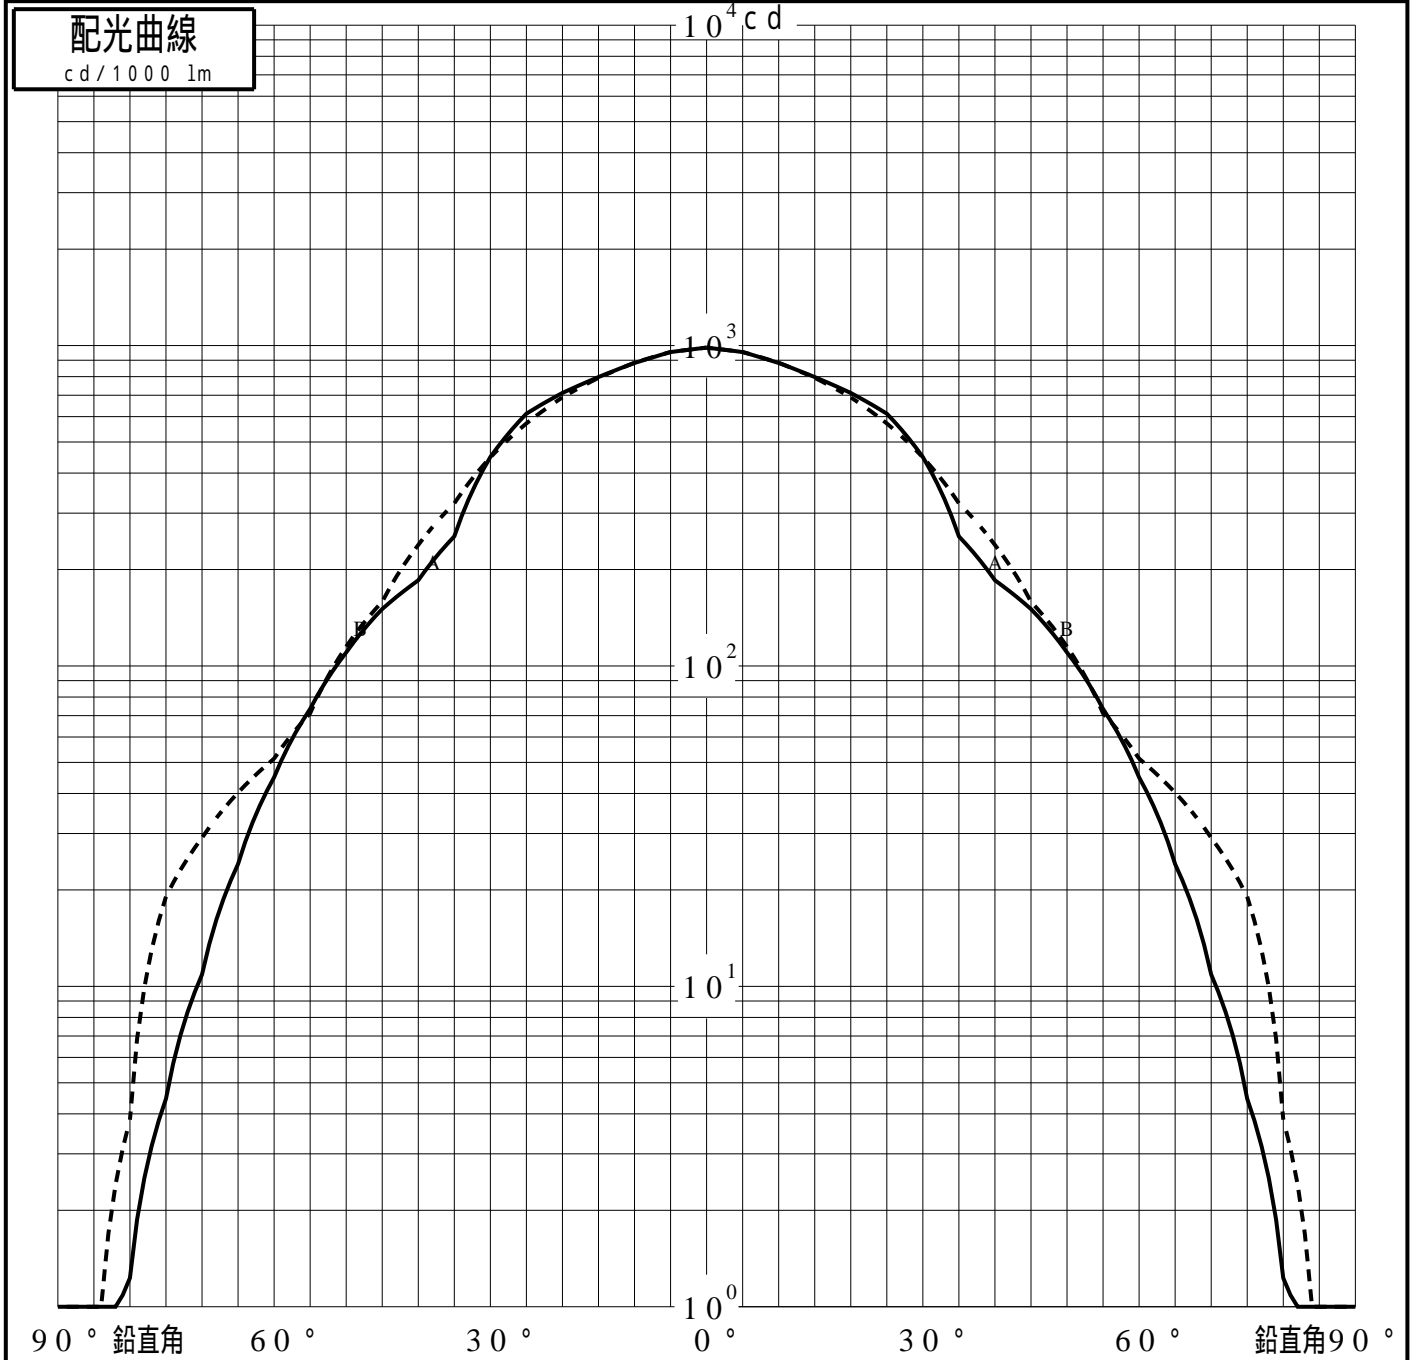


# 投光照明器具特性

品名(品番)	NYT1074N+NYK50013	
光源	LED5000_70_4160 x1	4160.0 lm
管理番号	K0168553(0)DR1 TF	


配光の区分・種類	二面对称配光	主ビ-ム効率	%		
器具点灯角度		ビ-ム範囲	I <sub>0</sub> / 2	I <sub>0</sub> / 10	I <sub>0</sub> / 20
器具効率	100.1 %	ビ-ム効率	53.7%	90.1%	95.4%
最大光度	986 cd/1000 lm	ビ-ム角	AA 57.3	103.2	118.5
			BB 56.4	103.7	121.9

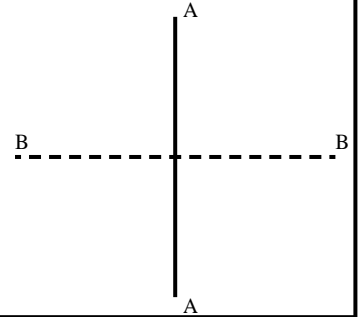

# 投光照明器具特性

品番(品名)	NYT1074N+NYK50013	光源	LED5000_70_4160 ×1
管理番号	K0168553(0)DR1 TF		

## 累積光束曲線

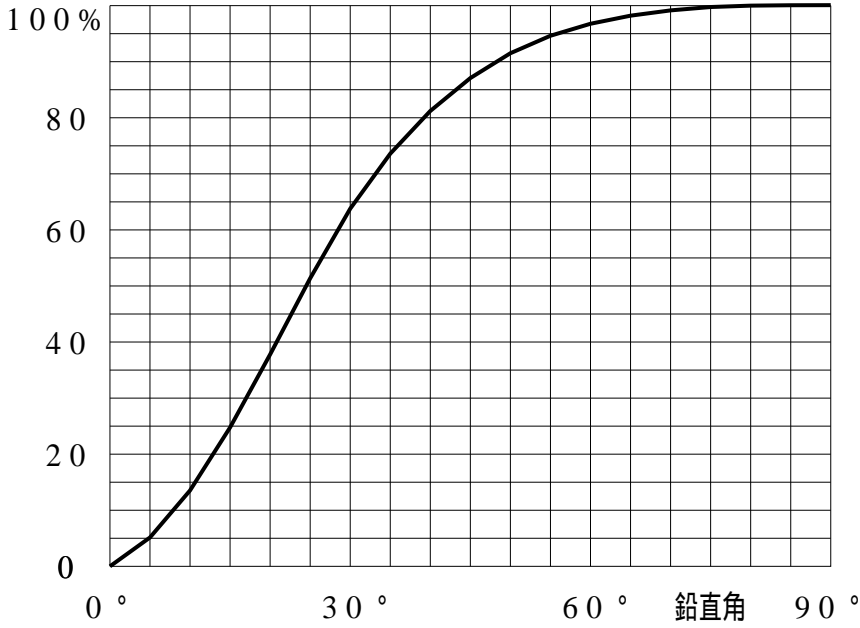

## 等光度曲線

(座標系)  
cd/1000 lm

