


# 屋外照明器具特性

品番(品名)	XY6050Z_5 DEG																			
光源	LED5000_85_59000 ×1 59000.0 lm																			
管理番号	K0167786(0)DR1																			
JISC8131-1999 による配光形式																				
器具効率	100.0%	直下光度	208.4 cd/1000lm																	
上方光束	0.0%	最大光度	814.7 cd/1000lm																	
下方光束	99.9%																			
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	
=0°鉛直面	208	254	302	338	363	401	475	556	615	624	701	777	751	578	271	96	38	14	0	0
90°	208	205	202	201	198	193	186	187	187	174	142	111	77	52	42	31	14	0	0	0
180°	208	163	131	120	119	120	120	121	120	114	100	83	59	45	26	13	0	0	0	0
270°	208	205	201	195	190	184	178	179	171	149	117	90	62	48	40	24	11	0	0	0
I <sub>max</sub> を含む鉛直面	208	254	296	334	361	395	462	529	562	591	686	790	792	614	306	108	43	16	0	0

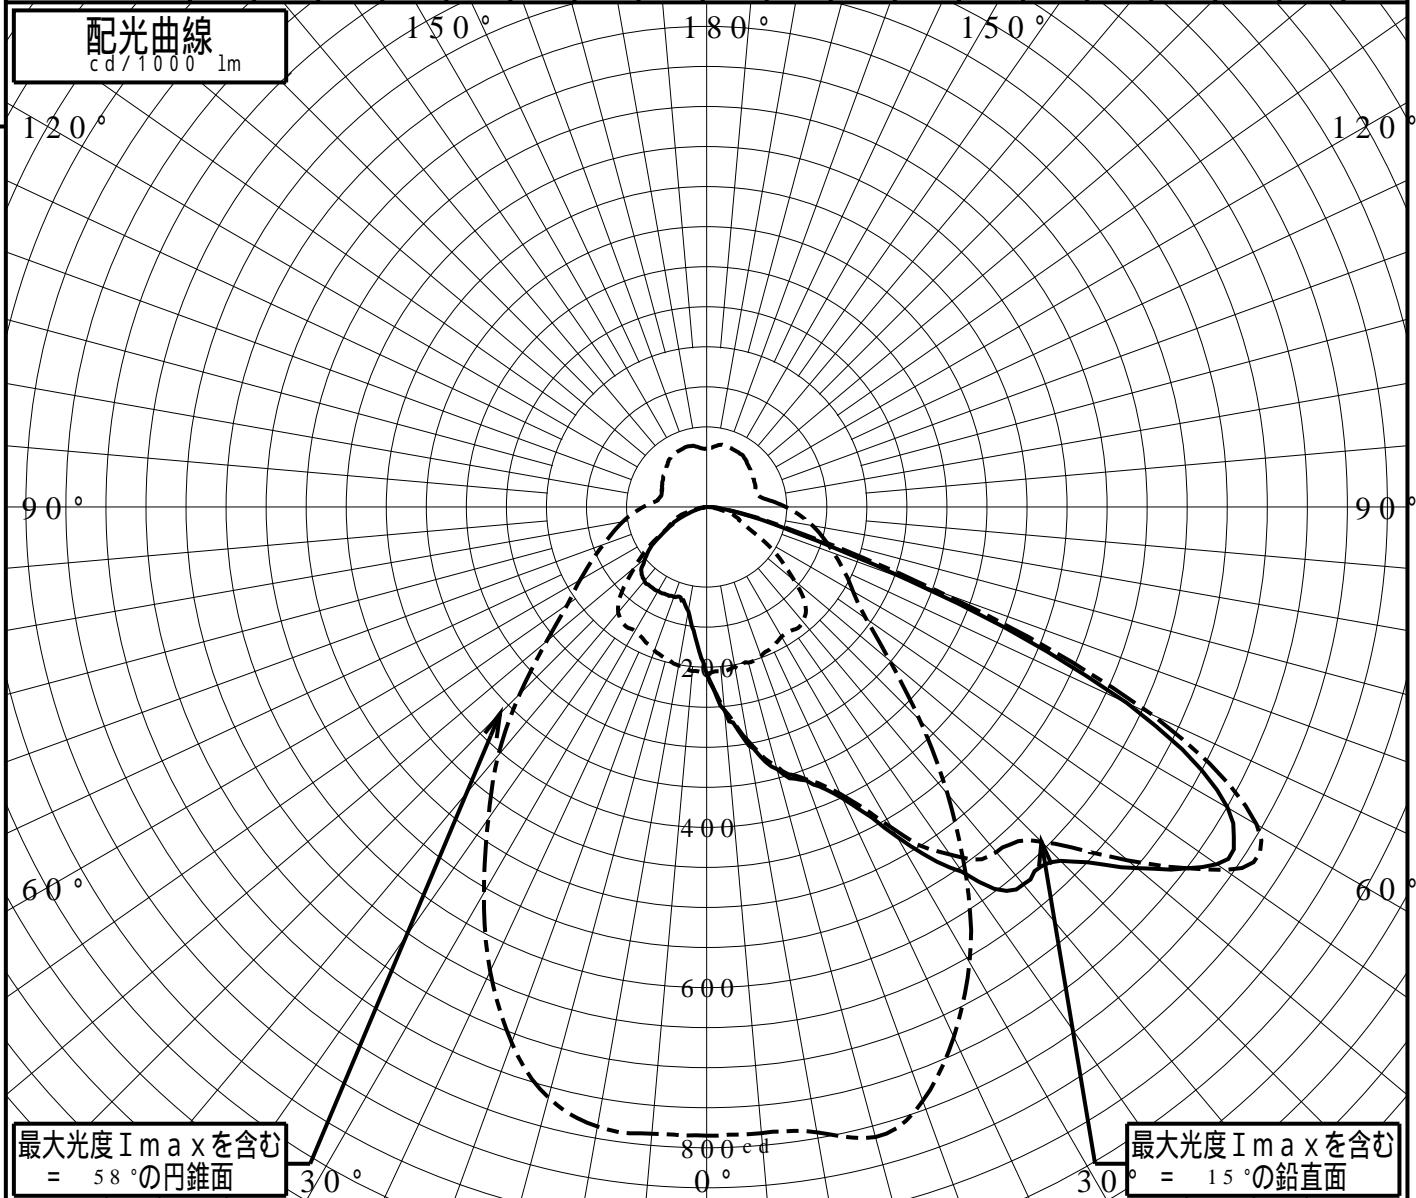

# 道路・トンネル照明率曲線

品番(品名) XY6050Z\_5 DEG

光源


LED5000\_85\_59000 x1

管理番号 K0167786 (0)DR 1

————— = 1.0°

H: 取付高さ

照明率( = 0°)		
幅	歩道側	車道側
0.0H	0.000	0.000
0.2H	0.050	0.079
0.4H	0.086	0.176
0.6H	0.118	0.271
0.8H	0.144	0.361
1.0H	0.163	0.442
1.2H	0.177	0.514
1.4H	0.186	0.578
1.6H	0.193	0.631
1.8H	0.198	0.672
2.0H	0.201	0.703
2.2H	0.203	0.725
2.4H	0.205	0.741
2.6H	0.206	0.753
2.8H	0.207	0.761
3.0H	0.208	0.766
3.2H	0.208	0.771
3.4H	0.209	0.774
3.6H	0.209	0.776

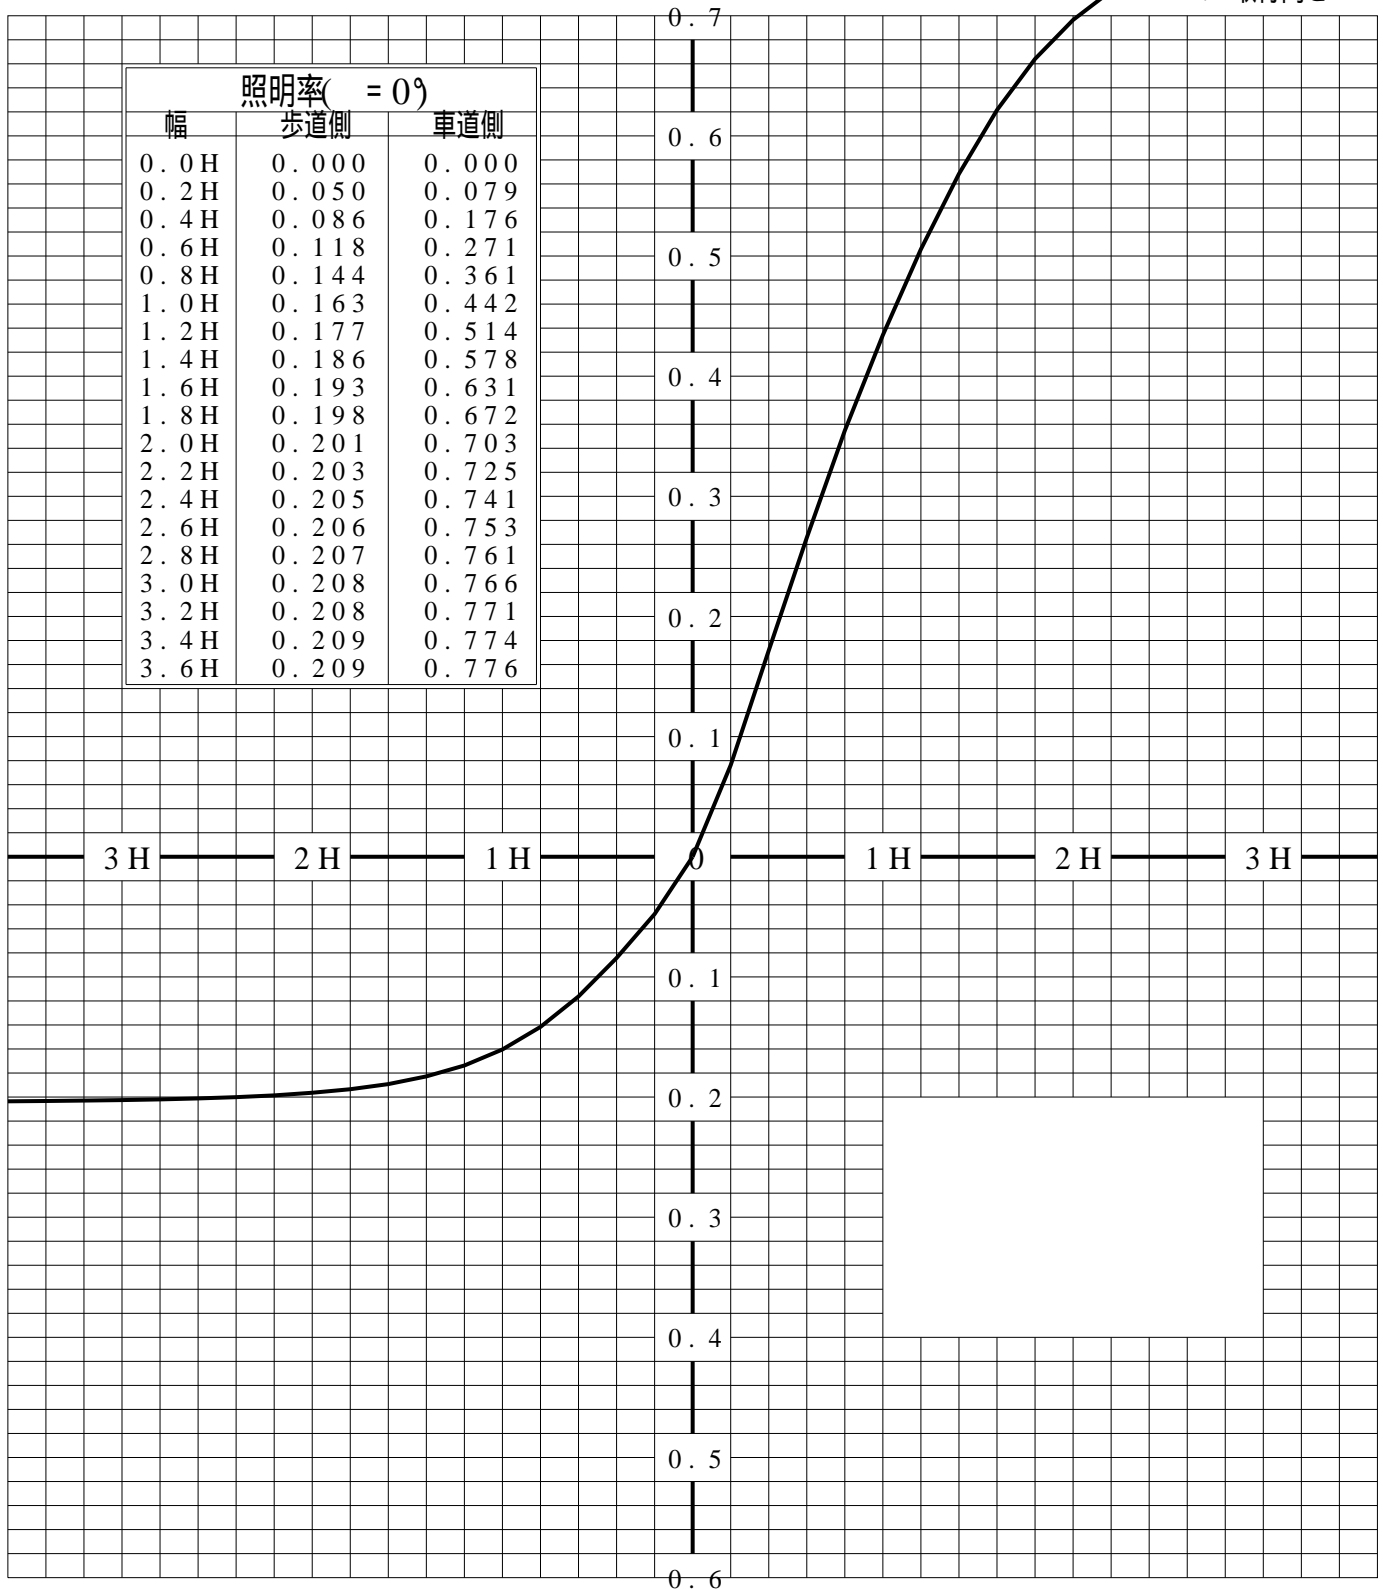

歩道側 ← → 車道側

# 正弦等光度曲線

品番(品名)	XY6050Z_5 DEG	光源	LED5000_85_59000 x1
管理番号	K0167786(0)DR 1		

