

屋内照明器具特性

品番 (品名) NTN8 2 1 1 3 + NTS9 0 1 0 0

光源 LED3000_70_120 ×1 120.0 l m


管理番号 K0156451 (0) DB 1

B Z 分類 B Z 1

器具効率		1 0 0 %	反射率	天井	8 0 %				7 0 %				5 0 %				3 0 %				0 %	
				壁	7 0	5 0	3 0	1 0	7 0	5 0	3 0	1 0	7 0	5 0	3 0	1 0	7 0	5 0	3 0	1 0	0 %	
				床	1 0 %				1 0 %				1 0 %				1 0 %				0 %	
上方光束		0 %	室指数	照明率 (X 0 . 0 1)																		Z C M
下方光束		1 0 0 %																				
保守率		良	0 . 6 3	0 . 6	7 8	7 0	6 6	6 3	7 7	7 0	6 6	6 2	7 5	6 9	6 5	6 2	7 4	6 9	6 5	6 2	6 1	
		中	0 . 6	0 . 8	8 5	7 9	7 4	7 1	8 4	7 8	7 4	7 1	8 3	7 7	7 3	7 1	8 1	7 6	7 3	7 0	6 9	
		否	0 . 5 6	1 . 0	9 0	8 4	8 0	7 7	8 9	8 4	8 0	7 7	8 7	8 2	7 9	7 6	8 5	8 1	7 8	7 6	7 4	
				1 . 2 5	9 4	8 9	8 5	8 2	9 3	8 8	8 4	8 2	9 1	8 7	8 4	8 1	8 9	8 5	8 3	8 1	7 9	
下方投影面積		c m ²		1 . 5	9 6	9 2	8 8	8 5	9 5	9 1	8 8	8 5	9 3	8 9	8 7	8 4	9 1	8 8	8 6	8 4	8 2	
等価発光面積		c m ²		2 . 0	9 9	9 6	9 3	9 0	9 8	9 5	9 2	9 0	9 6	9 3	9 1	8 9	9 4	9 2	9 0	8 8	8 6	
取付	器具間隔最大限			2 . 5	1 0 1	9 8	9 5	9 3	1 0 0	9 7	9 5	9 3	9 8	9 5	9 3	9 2	9 6	9 4	9 2	9 1	8 9	
高さ	横方向 (A)		縦方向 (B)	3 . 0	1 0 2	1 0 0	9 7	9 5	1 0 1	9 9	9 7	9 5	9 9	9 7	9 5	9 4	9 7	9 5	9 4	9 2	9 0	
H m	0 . 6 4 H m		0 . 9 1 H m	4 . 0	1 0 4	1 0 2	1 0 0	9 8	1 0 3	1 0 1	9 9	9 8	1 0 0	9 9	9 7	9 6	9 8	9 7	9 6	9 5	9 3	
				5 . 0	1 0 5	1 0 3	1 0 1	1 0 0	1 0 3	1 0 2	1 0 1	9 9	1 0 1	1 0 0	9 9	9 8	9 9	9 8	9 7	9 6	9 4	
				7 . 0	1 0 6	1 0 4	1 0 3	1 0 2	1 0 4	1 0 3	1 0 2	1 0 1	1 0 2	1 0 1	1 0 0	1 0 0	1 0 0	9 9	9 9	9 8	9 5	
				1 0 . 0	1 0 6	1 0 6	1 0 5	1 0 4	1 0 5	1 0 4	1 0 4	1 0 3	1 0 3	1 0 2	1 0 2	1 0 1	1 0 1	1 0 0	1 0 0	9 9	9 7	

配光曲線

ランプ光束1000lm

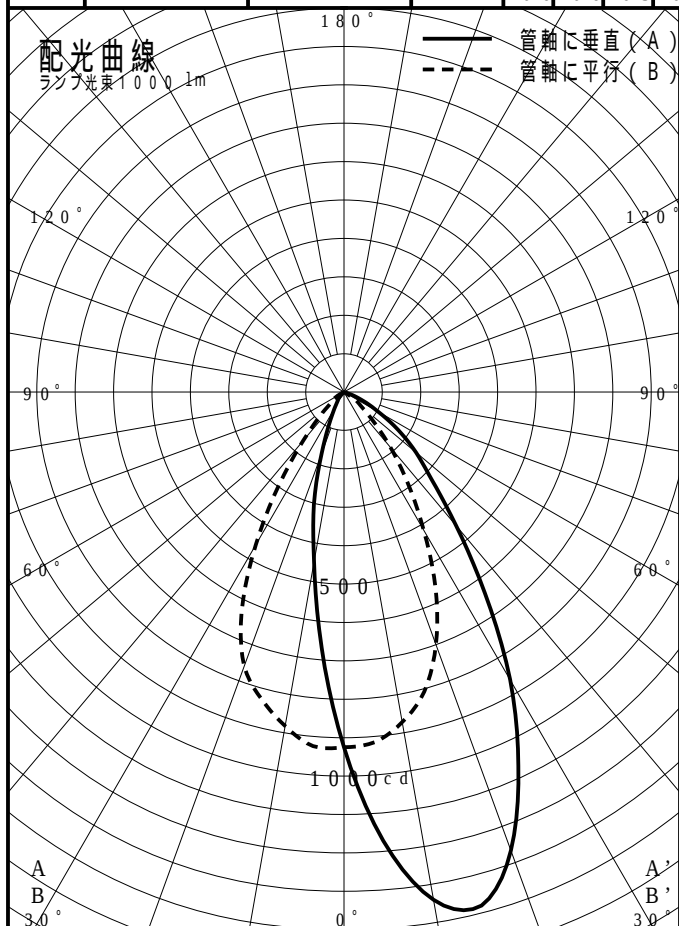

直射水平面照度

ランプ光束1000lm

