
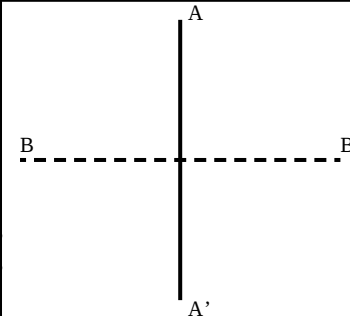


投光照明器具特性		
品名(品番)	NTS01506B+NTS91034(17DEG)	
光源	LED4000_70_760 x1 760.0 l m	
管理番号	K0168028(0)DJ1 XY	



配光の区分・種類	非対称配光	主ビーム効率	%			
器具点灯角度		ビーム範囲	I ₀ / 2	I ₀ / 10	I ₀ / 20	
器具効率	100.0 %	ビーム効率	49.0%	85.4%	90.8%	
最大光度	2611 cd/1000 lm	ビーム角 AA' 17.8° BB' 60.2°	35.9	92.5	104.2	

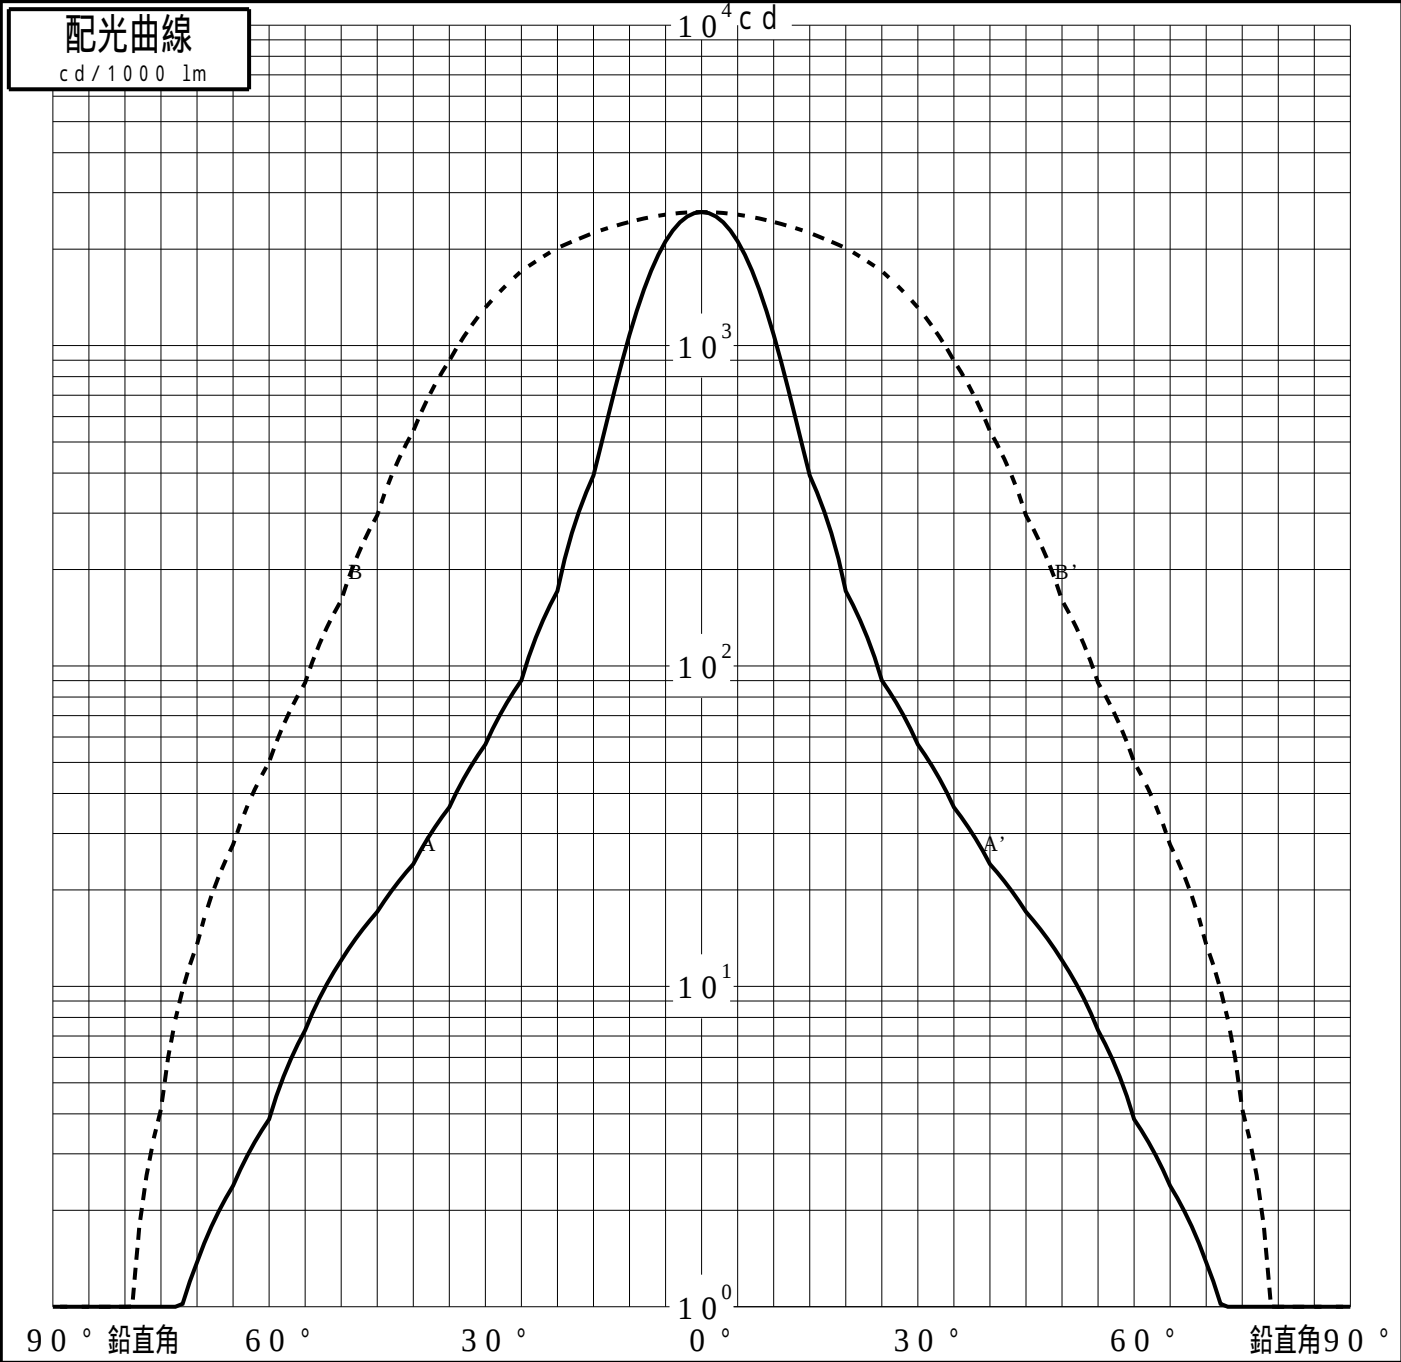

投光照明器具特性

品番 (品名)	NTS01506B+NTS91034(17 DEG	光源	LED4000_70_760 ×1
管理番号	K0168028(0)DJ1 XY		

累積光束曲線

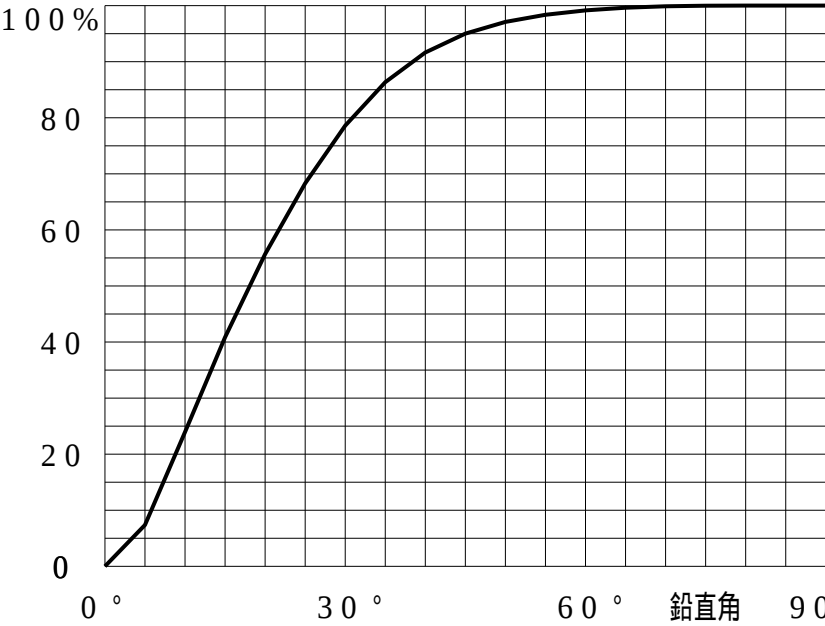

等光度曲線

(αβ座標系)
cd/1000 lm

