


# 屋外照明器具特性

品番(品名)	XYT2003R																			
光源	LED2700_70_680 x1	680.0 lm																		
管理番号	K0172103(0)DR1																			
JISC8131-1999 による配光形式																				
器具効率	100.0%	直下光度	0.0 cd/1000lm																	
上方光束	18.4%	最大光度	233.5 cd/1000lm																	
下方光束	81.7%																			
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	
=0°鉛直面	0	1	2	4	16	77	135	168	200	233	231	217	196	162	116	89	63	43	34	
90°	0	1	2	4	16	77	135	168	200	233	231	217	196	162	116	89	63	43	34	
180°	0	1	2	4	16	77	135	168	200	233	231	217	196	162	116	89	63	43	34	
270°	0	1	2	4	16	77	135	168	200	233	231	217	196	162	116	89	63	43	34	
I <sub>max</sub> を含む鉛直面	0	1	2	4	16	77	135	168	200	233	231	217	196	162	116	89	63	43	34	

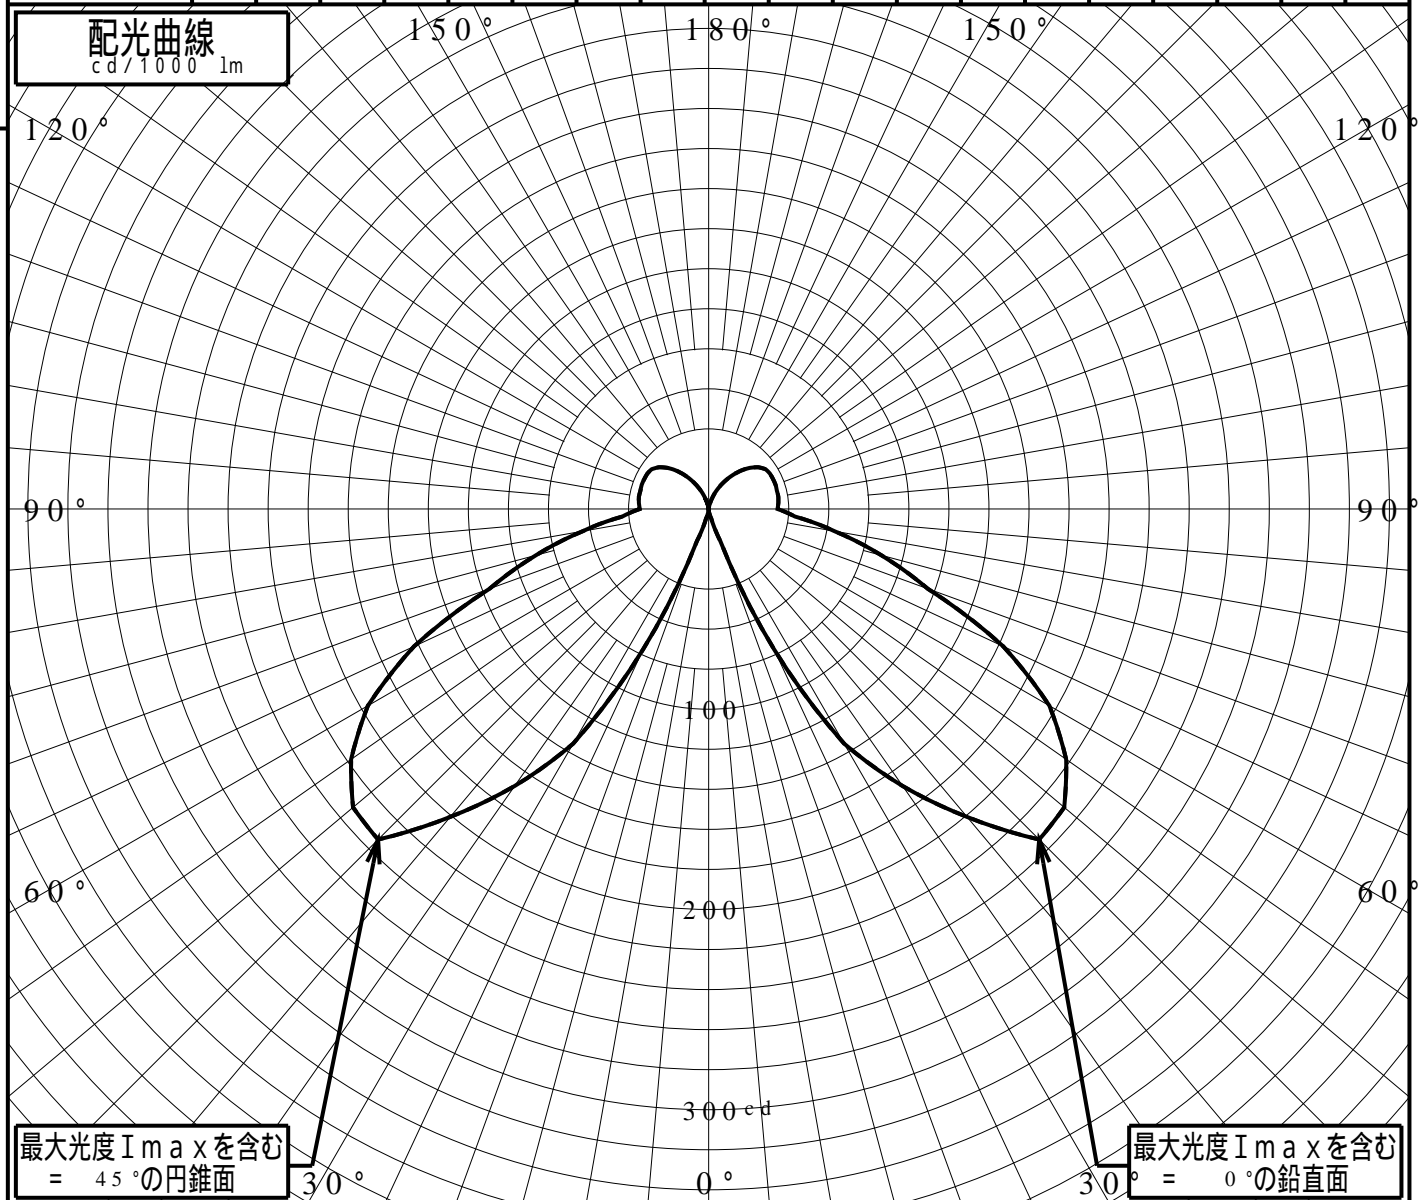


# 道路・トンネル照明率曲線

品番(品名)	XYT2003R	光源	LED2700_70_680 ×1
管理番号	K0172103 (0)DR 1		

————— = 0.0°

H: 取付高さ

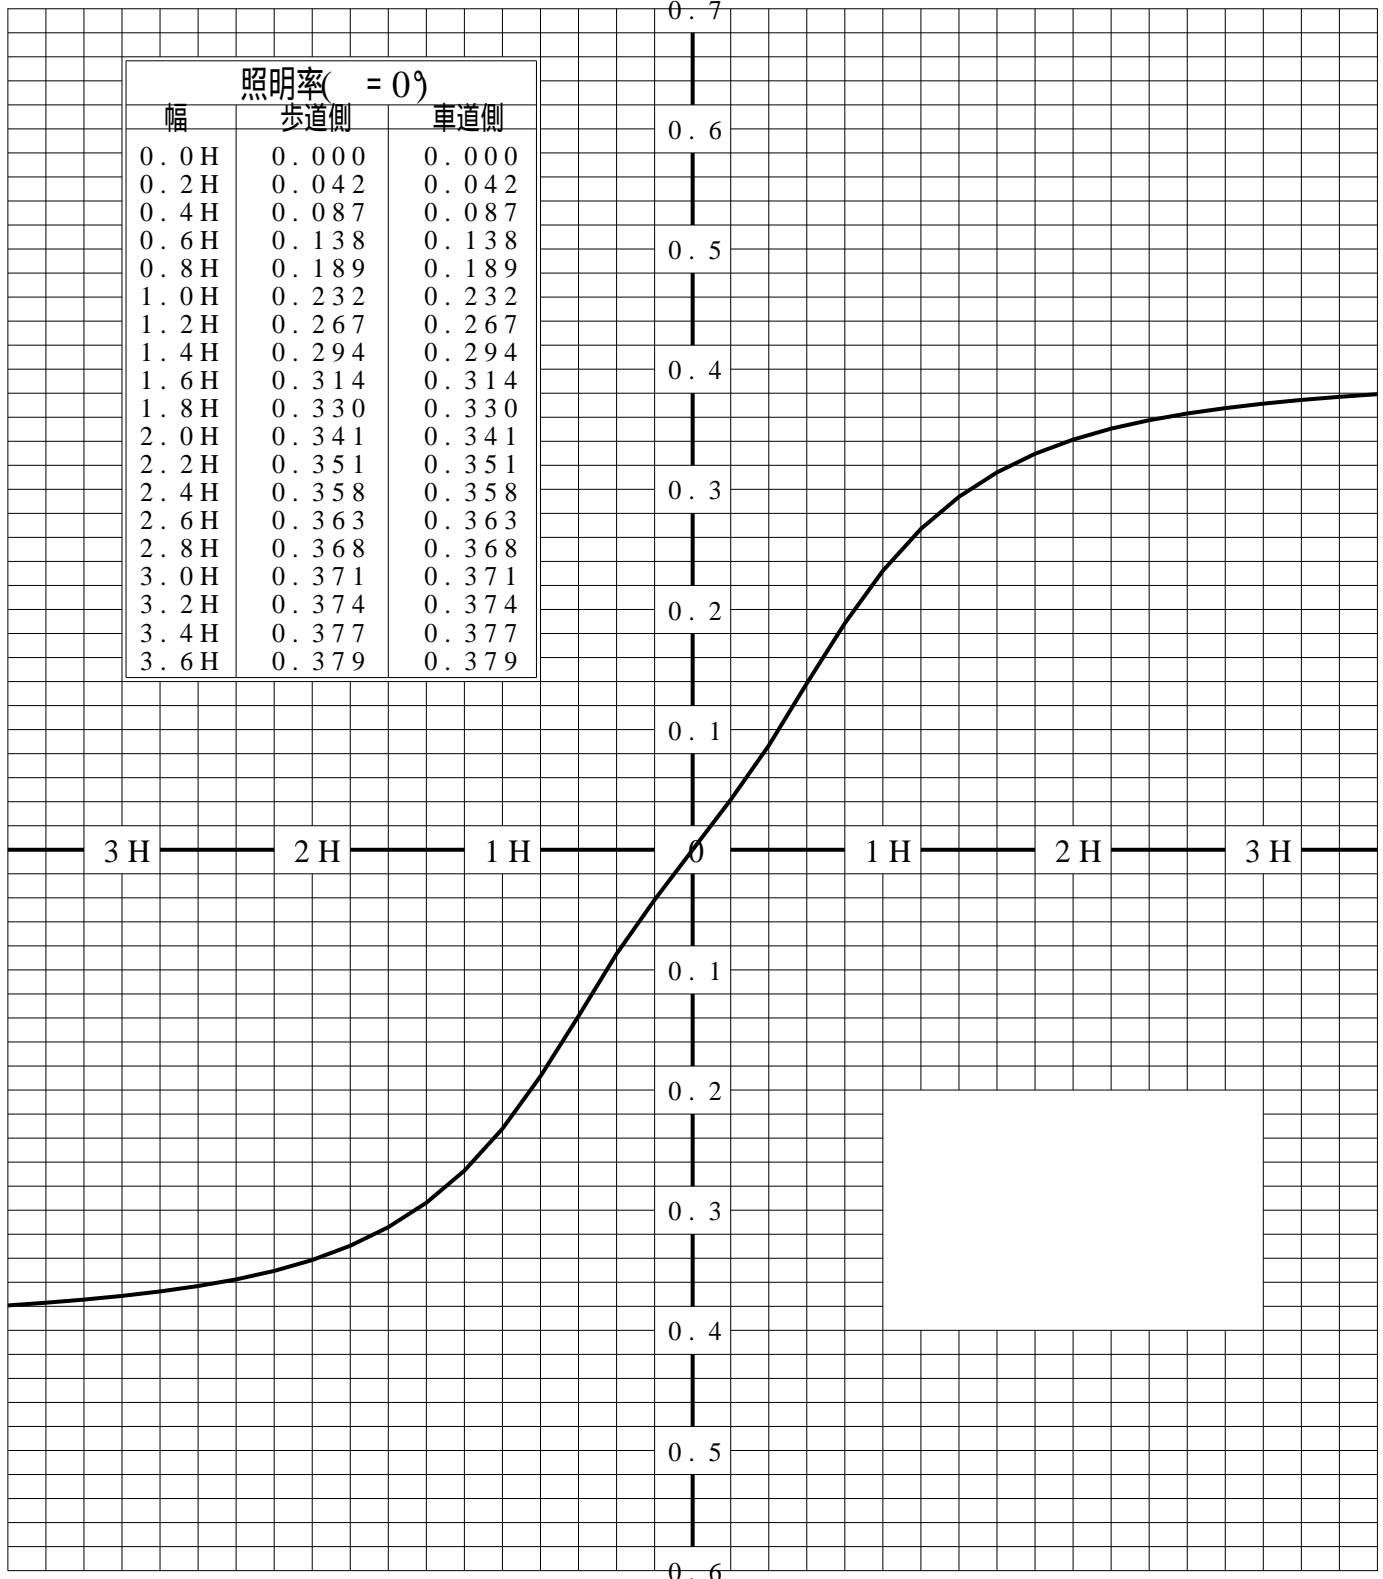

歩道側 ← → 車道側