
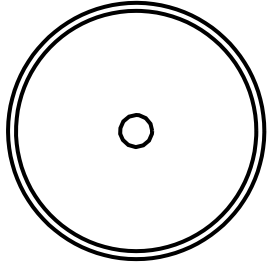


# 投光照明器具特性


品名(品番)	NTS02501B+NTS91031(34DEG)					
光源	LED4000_70_1660 x1 1660.0 lm					
管理番号	K0170853(0)DJ1 TF					
配光の区分・種類	軸対称配光 中角形	主ビ-ム効率	89.4 %			
器具点灯角度		ビ-ム範囲	$I_0 / 2$	$I_0 / 10$	$I_0 / 20$	
器具効率	100.0 %	ビ-ム効率	57.9%	86.8%	91.9%	
最大光度	2704 cd/1000 lm	ビ-ム角	34.5	55.7	64.7	

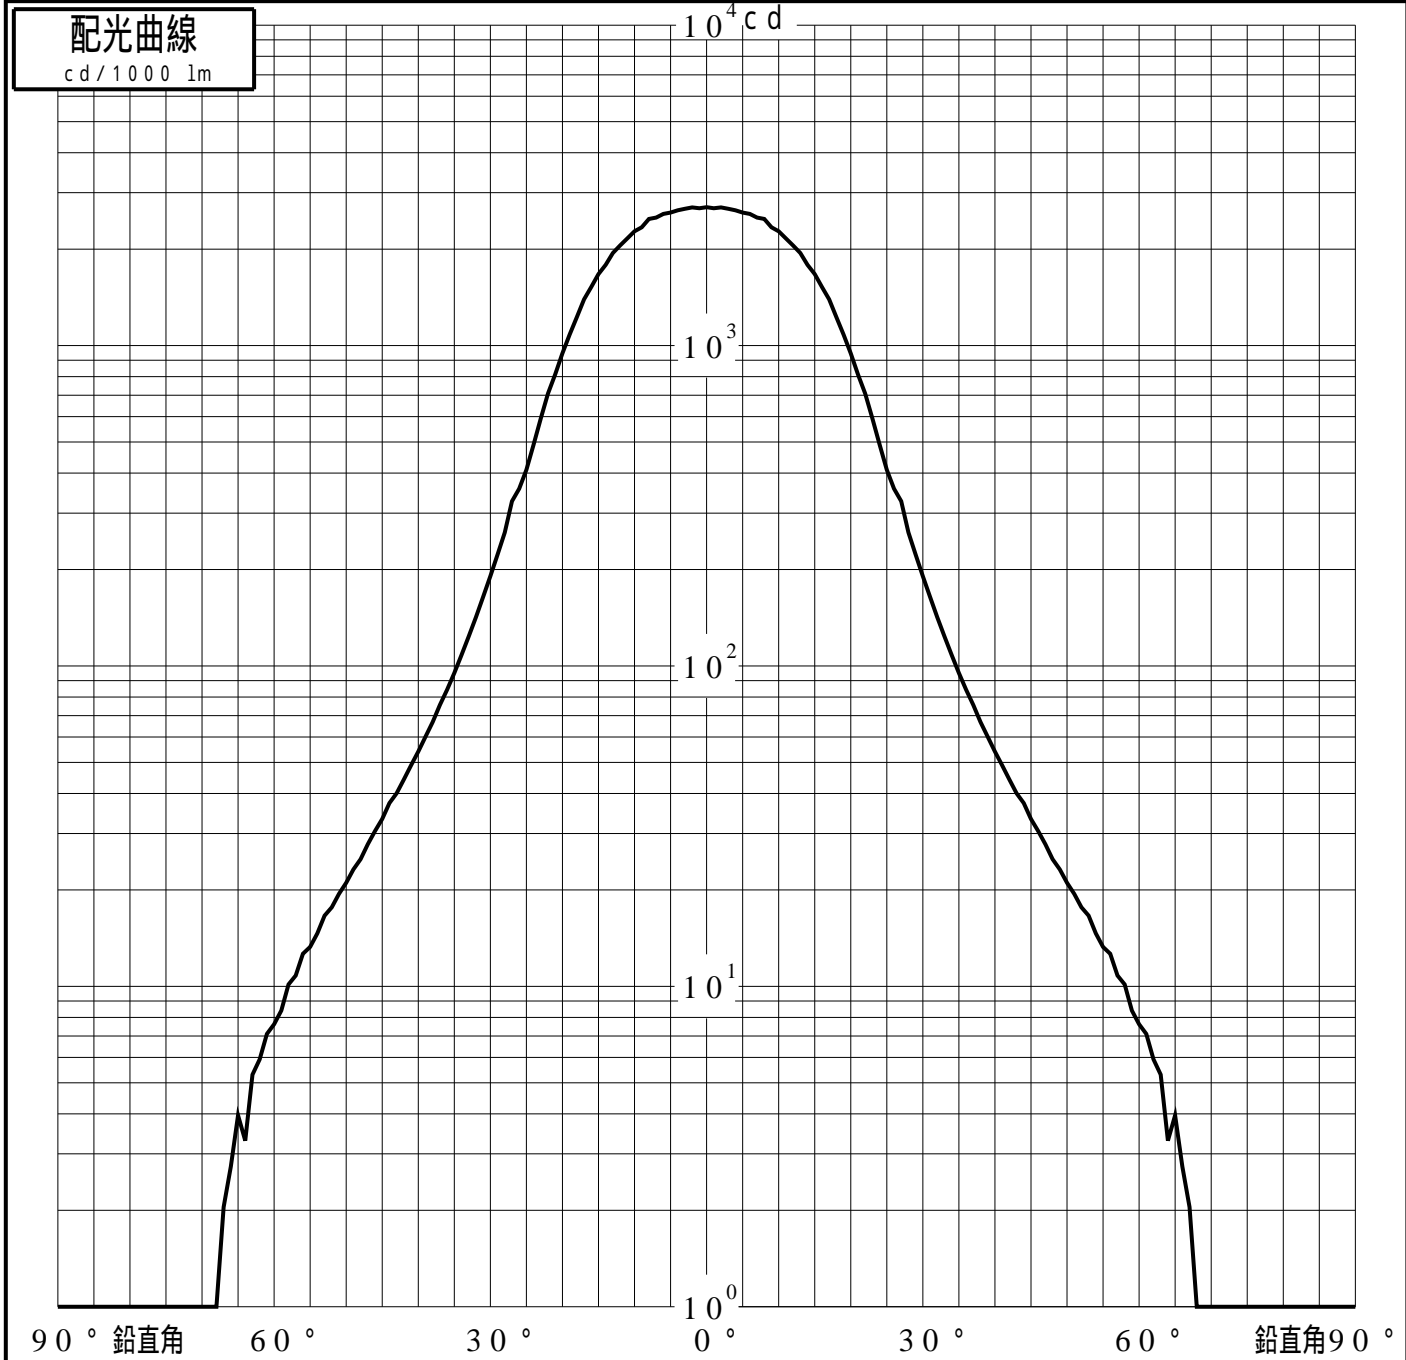

# 投光照明器具特性

品番 (品名)	NTS02501B+NTS91031(34 DEG	光源	LED4000_70_1660 ×1
管理番号	K0170853(0)DJ1 TF		

## 累積光束曲線

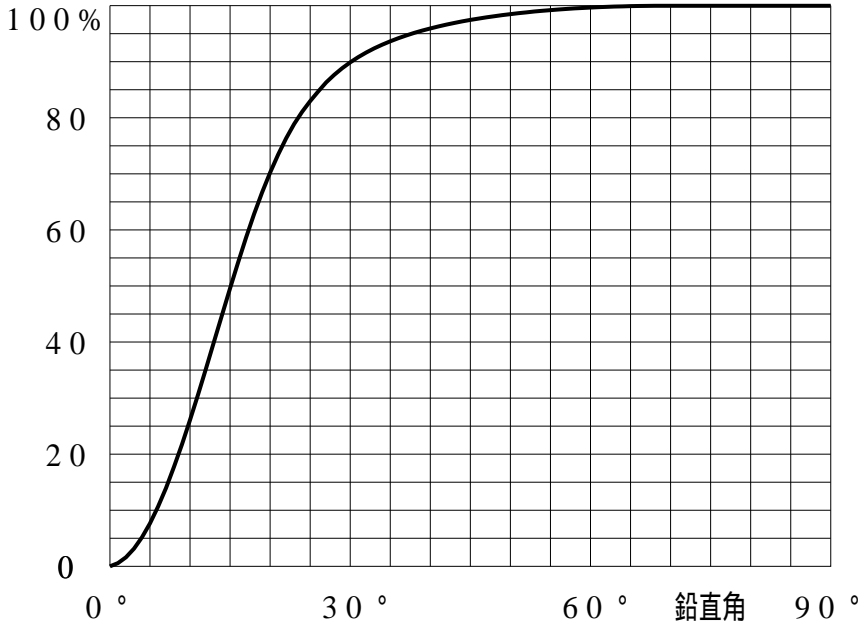

## 等光度曲線

(座標系)  
cd/1000 lm



最大光度 cd/1000 lm