


屋外照明器具特性

品番(品名)	YYY8 1 2 4 4																		
光源	LED3000_85_180 x1	180.0 lm																	
管理番号	K0172274(0)DB1																		
JISC8131-1999 による配光形式																			
器具効率	100.0%	直下光度	0.4 cd/1000lm																
上方光束	3.3%	最大光度	866.4 cd/1000lm																
下方光束	96.7%																		
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°
=0°鉛直面	0	0	52	185	346	515	665	775	842	853	701	487	203	116	66	48	36	26	18
90°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
180°	0	0	55	250	376	468	487	253	186	139	102	70	40	26	16	12	9	8	5
270°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
I _{max} を含む鉛直面	0	0	52	182	346	518	670	784	853	866	719	502	210	119	67	48	36	26	18

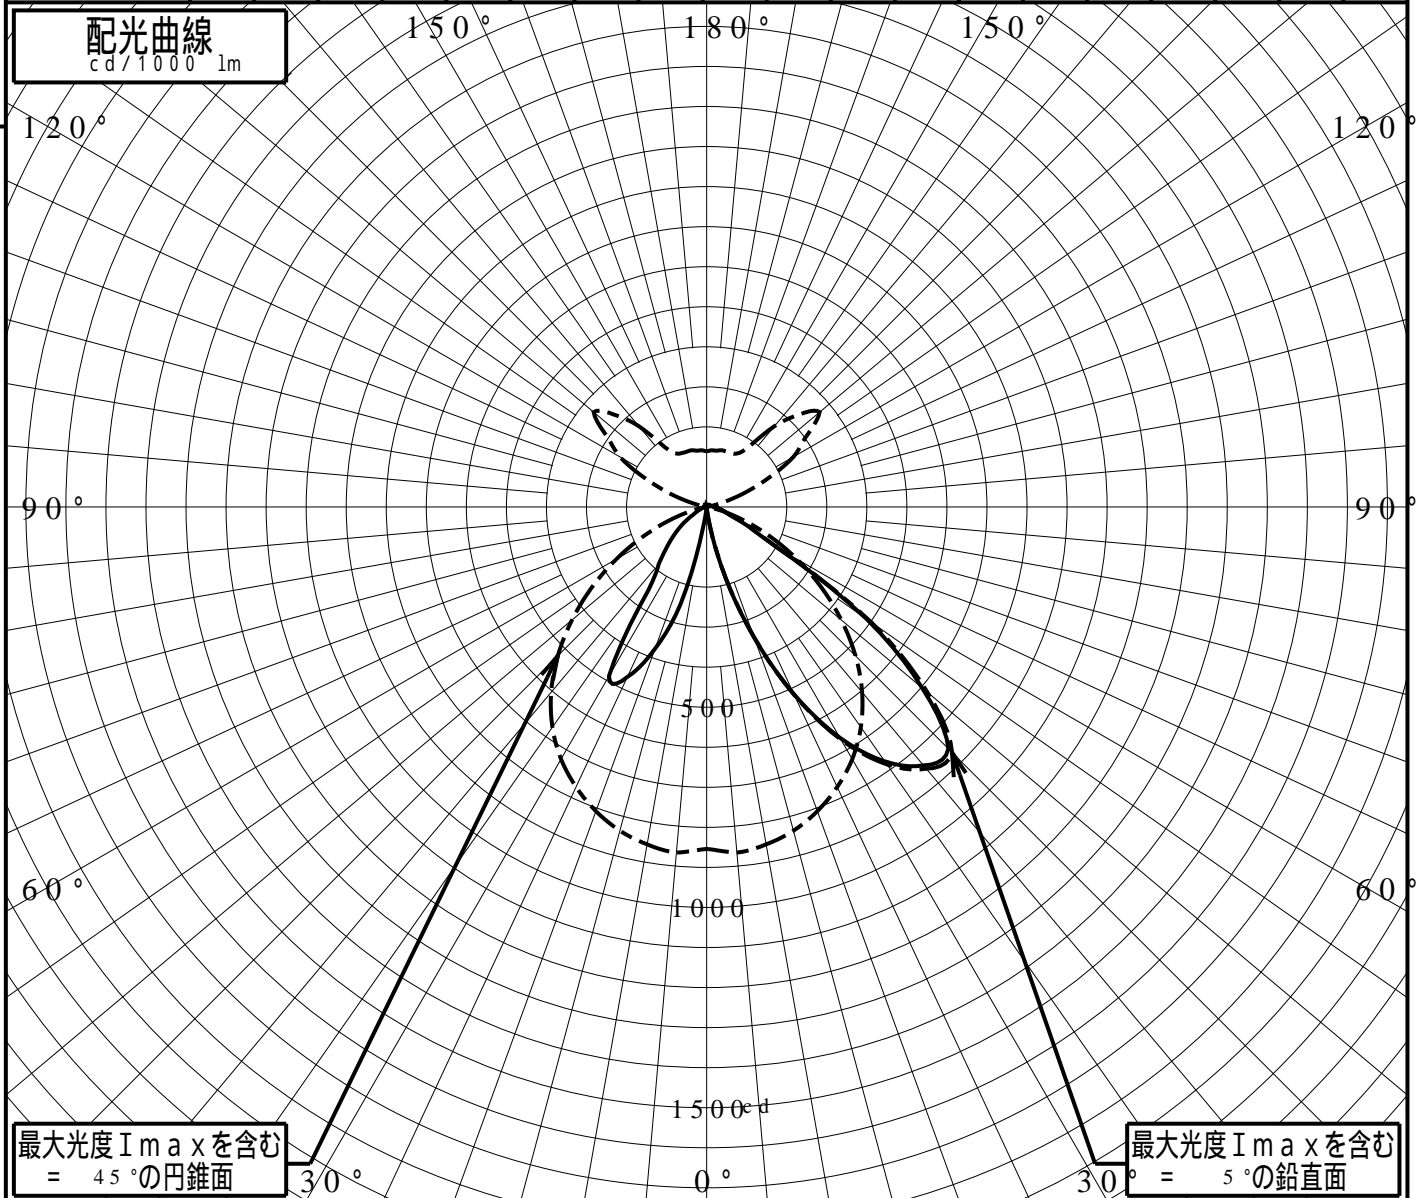


道路・トンネル照明率曲線

品番(品名)	YYY8 1 2 4 4	光源	LED3000_85_180 ×1
管理番号	K0172274 (0)DB 1		

————— = 0.0°

H: 取付高さ

照明率(= 0°)		
幅	歩道側	車道側
0.0H	0.000	0.000
0.2H	0.000	0.001
0.4H	0.053	0.049
0.6H	0.143	0.152
0.8H	0.207	0.274
1.0H	0.237	0.387
1.2H	0.254	0.476
1.4H	0.265	0.538
1.6H	0.271	0.577
1.8H	0.275	0.601
2.0H	0.278	0.617
2.2H	0.280	0.627
2.4H	0.282	0.634
2.6H	0.283	0.640
2.8H	0.284	0.644
3.0H	0.285	0.647
3.2H	0.285	0.650
3.4H	0.286	0.652
3.6H	0.286	0.654

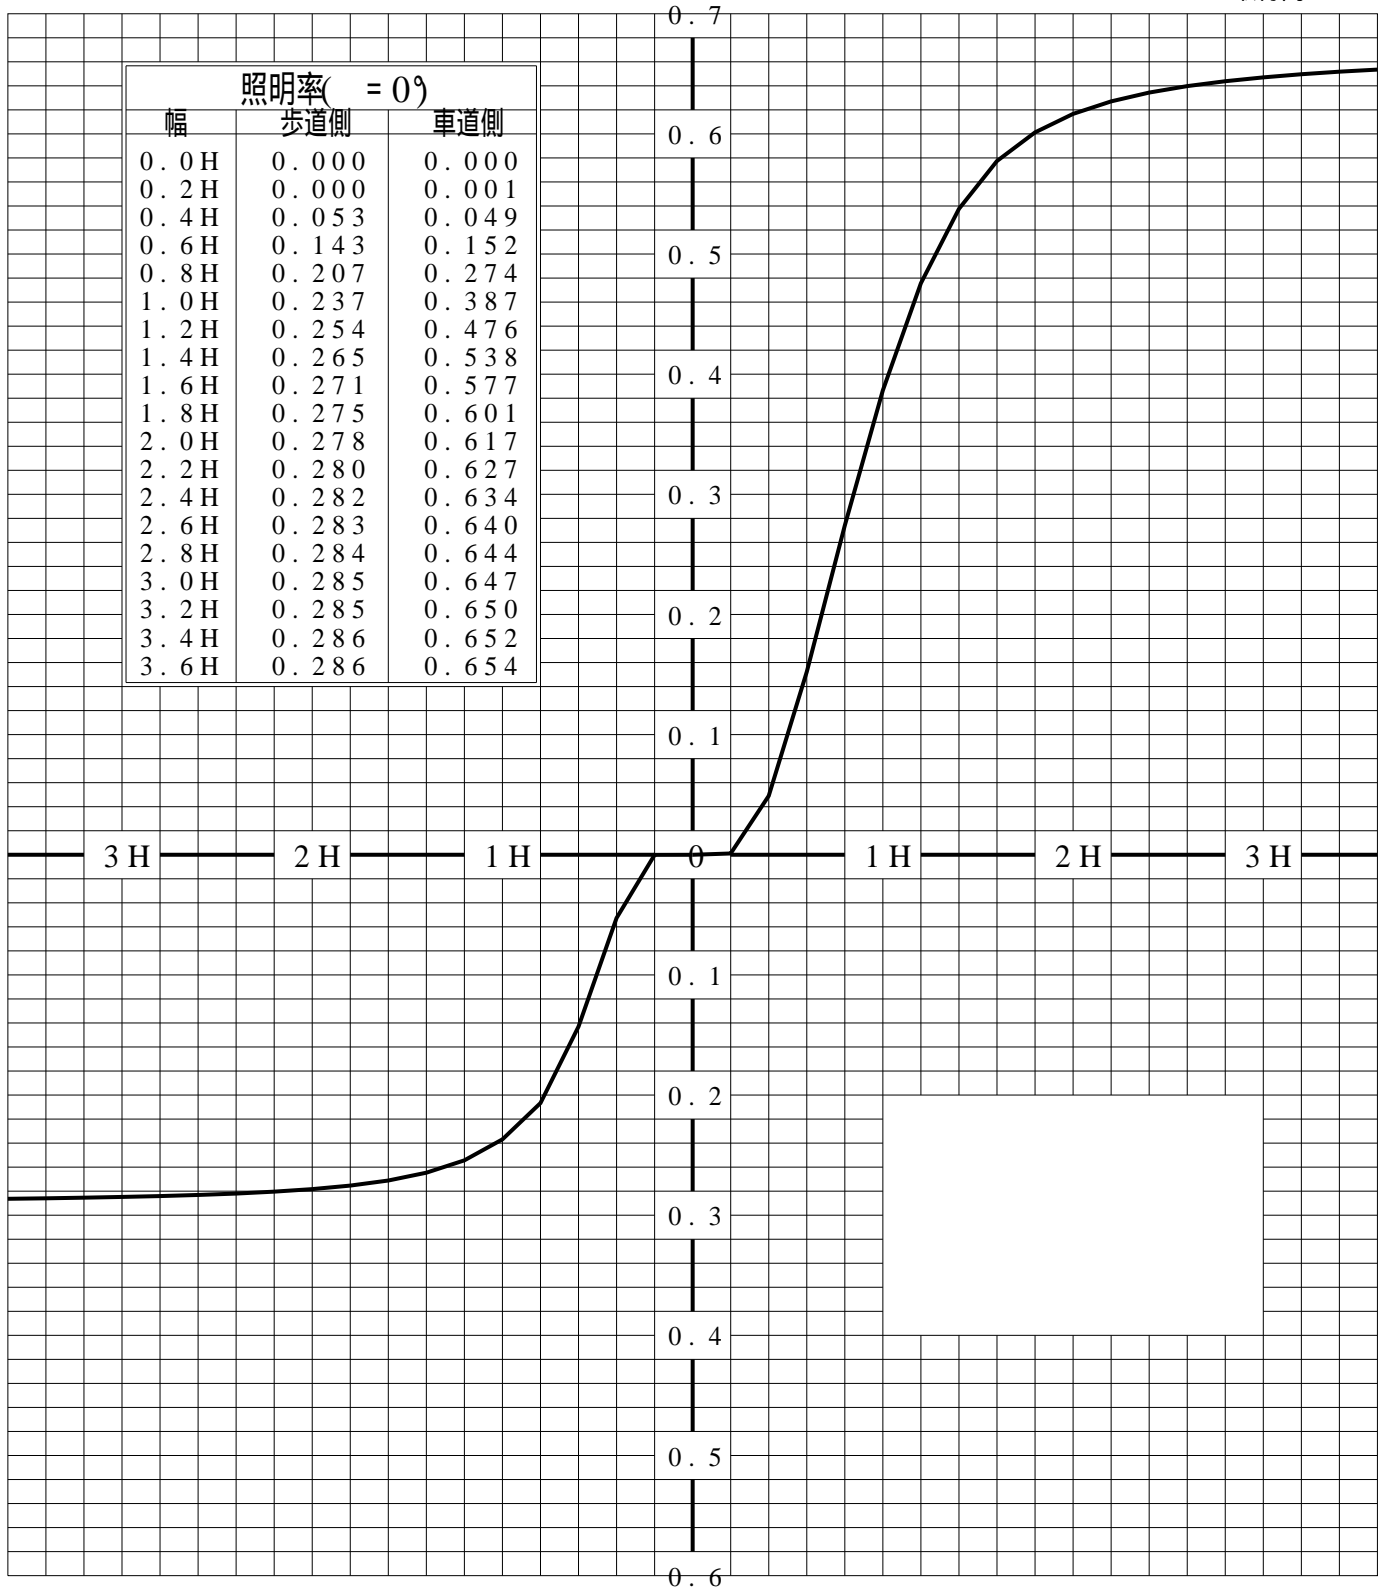

歩道側 ←————→ 車道側

正弦等光度曲線

品番(品名)	YYY81244	光源	LED3000_85_180 ×1
管理番号	K0172274(0)DB 1		

