
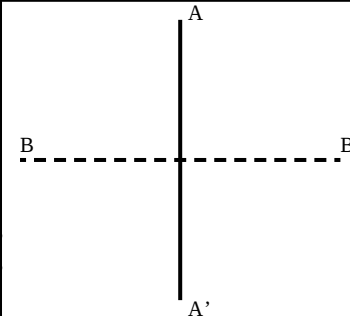


| 投光照明器具特性 |                              |  |  |  |  |
|----------|------------------------------|--|--|--|--|
| 品名（品番）   | NTS62512W+NTS90200+NTS91     |  |  |  |  |
| 光源       | LED3500_70_1190 ×1 1190.0 lm |  |  |  |  |
| 管理番号     | K0169339(0)DJ1 XY            |  |  |  |  |



|          |                    |                                  |                    |                     |                     |                                                                                     |
|----------|--------------------|----------------------------------|--------------------|---------------------|---------------------|-------------------------------------------------------------------------------------|
| 配光の区分・種類 | 非対称配光              | 主ビ - ム効率                         | %                  |                     |                     |  |
| 器具点灯角度   |                    | ビ - ム範囲                          | I <sub>0</sub> / 2 | I <sub>0</sub> / 10 | I <sub>0</sub> / 20 |                                                                                     |
| 器具効率     | 100.0 %            | ビ - ム効率                          | 46.4%              | 80.8%               | 87.9%               |                                                                                     |
| 最大光度     | 3130<br>cd/1000 lm | ビ - ム角<br>AA' 14.6°<br>BB' 56.7° | 29.1°<br>88.2°     | 38.9°<br>100.0°     |                     |                                                                                     |

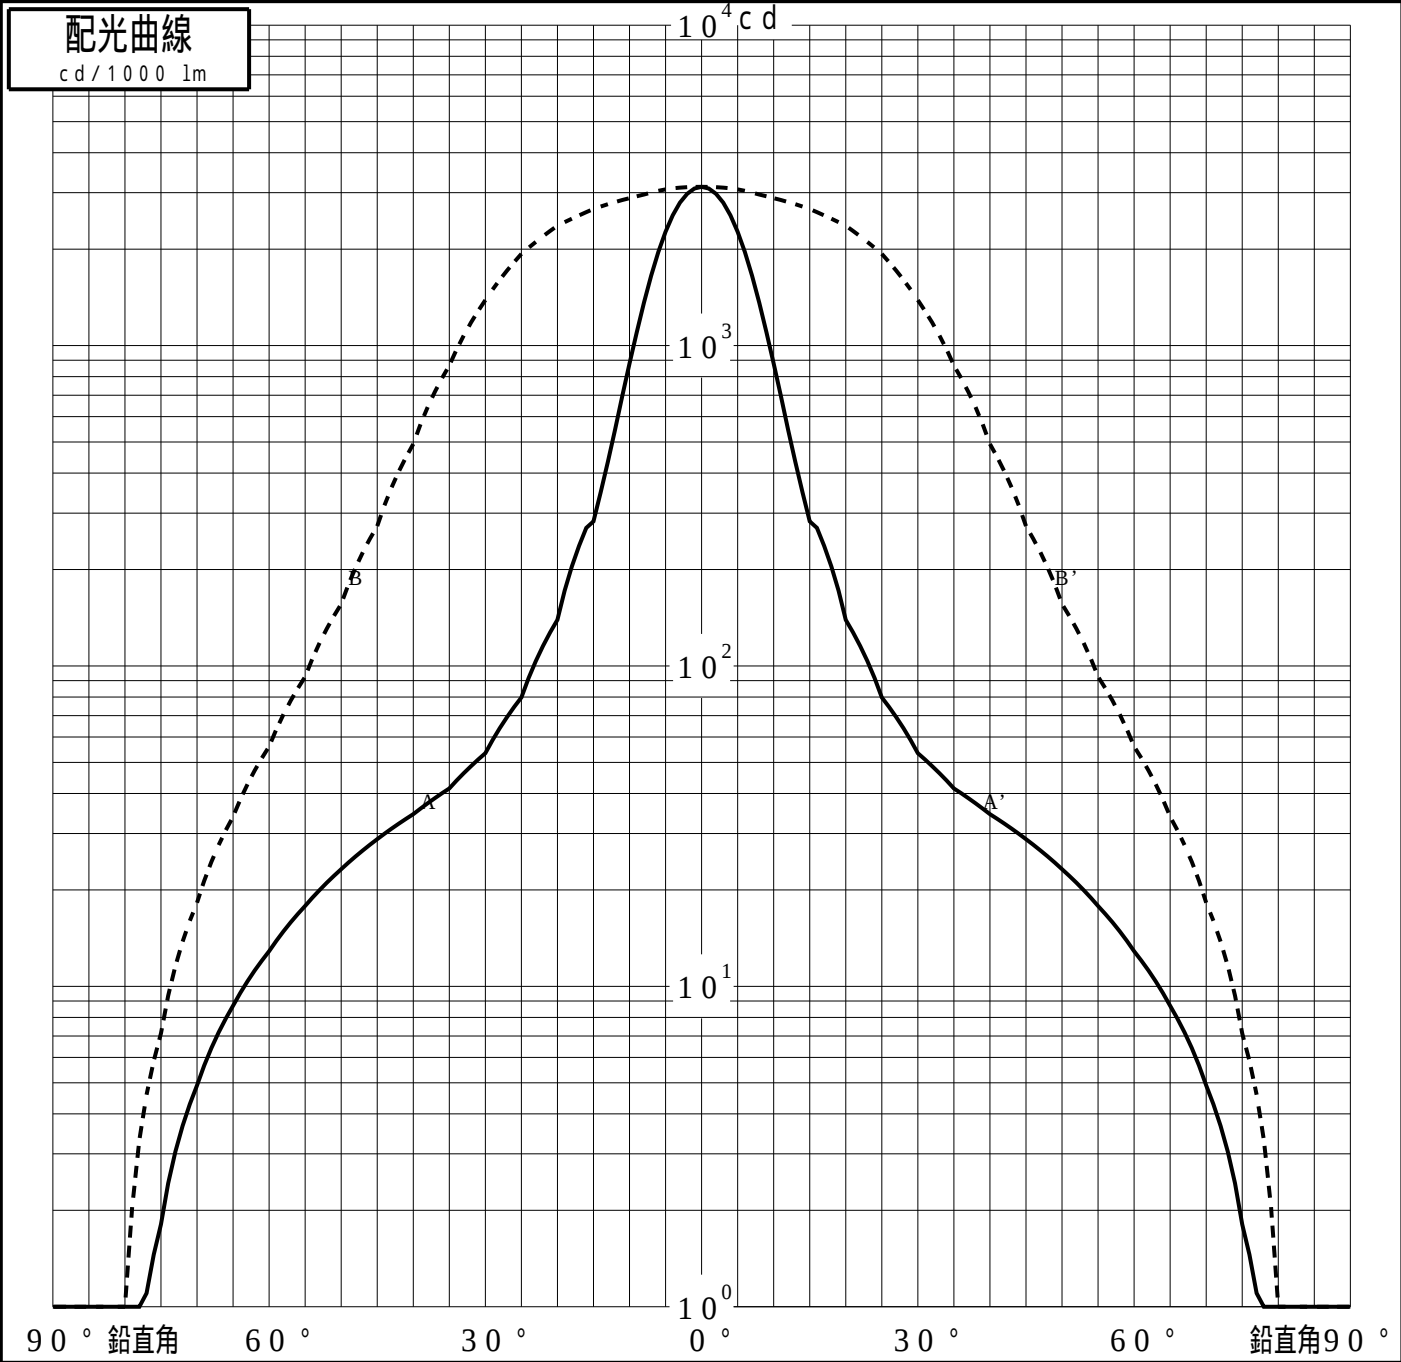

投光照明器具特性

|         |                          |    |                    |
|---------|--------------------------|----|--------------------|
| 品番 (品名) | NTS62512W+NTS90200+NTS91 | 光源 | LED3500_70_1190 ×1 |
| 管理番号    | K0169339(0)DJ1 XY        |    |                    |

累積光束曲線

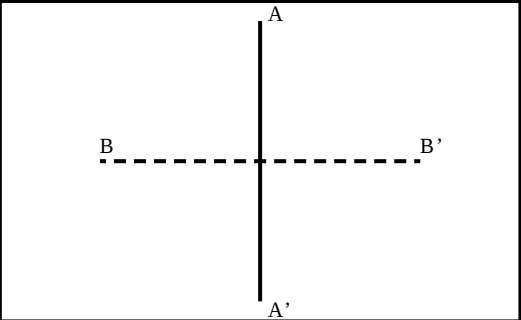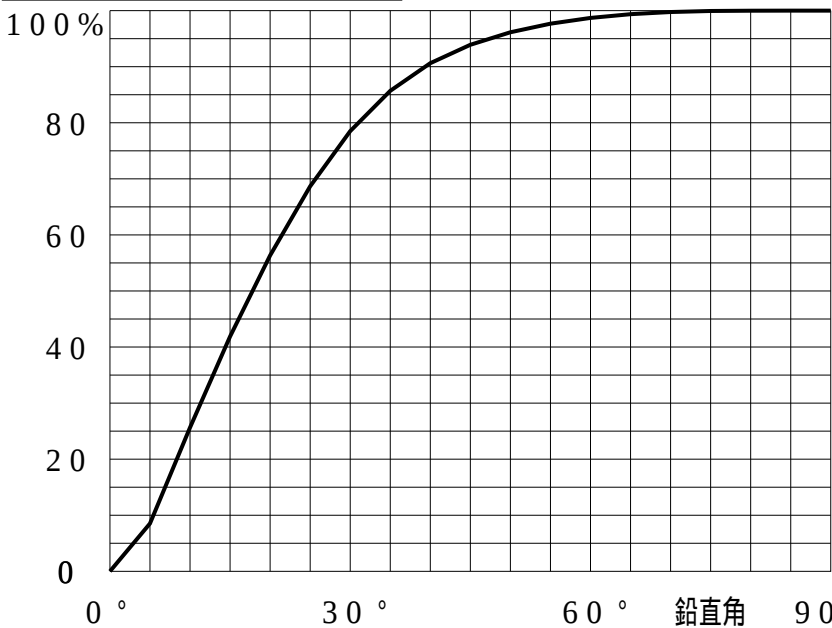

等光度曲線  
(αβ座標系)  
cd/1000 lm

