


屋外照明器具特性

品番(品名)	NNY2 2 5 6 1 K																		
光源	LED5000_70_13000 ×1 13000.0 lm																		
管理番号	K0144743(0)DB1																		
JISC8131-1999 による配光形式																			
器具効率	100.0%	直下光度	242.3 cd/1000lm																
上方光束	1.1%	最大光度	419.8 cd/1000lm																
下方光束	98.9%																		
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°
=0°鉛直面	242	259	271	289	313	334	343	335	308	259	189	133	87	58	40	27	18	11	6
90°	242	245	248	256	268	281	299	324	342	339	339	341	334	307	255	187	118	64	34
180°	242	227	208	189	169	143	118	97	83	79	79	75	57	31	18	10	6	4	0
270°	242	245	248	256	268	281	299	324	342	339	339	341	334	307	255	187	118	64	34
I _{max} を含む鉛直面	242	251	258	270	286	303	329	369	399	412	419	410	376	313	228	140	81	46	25

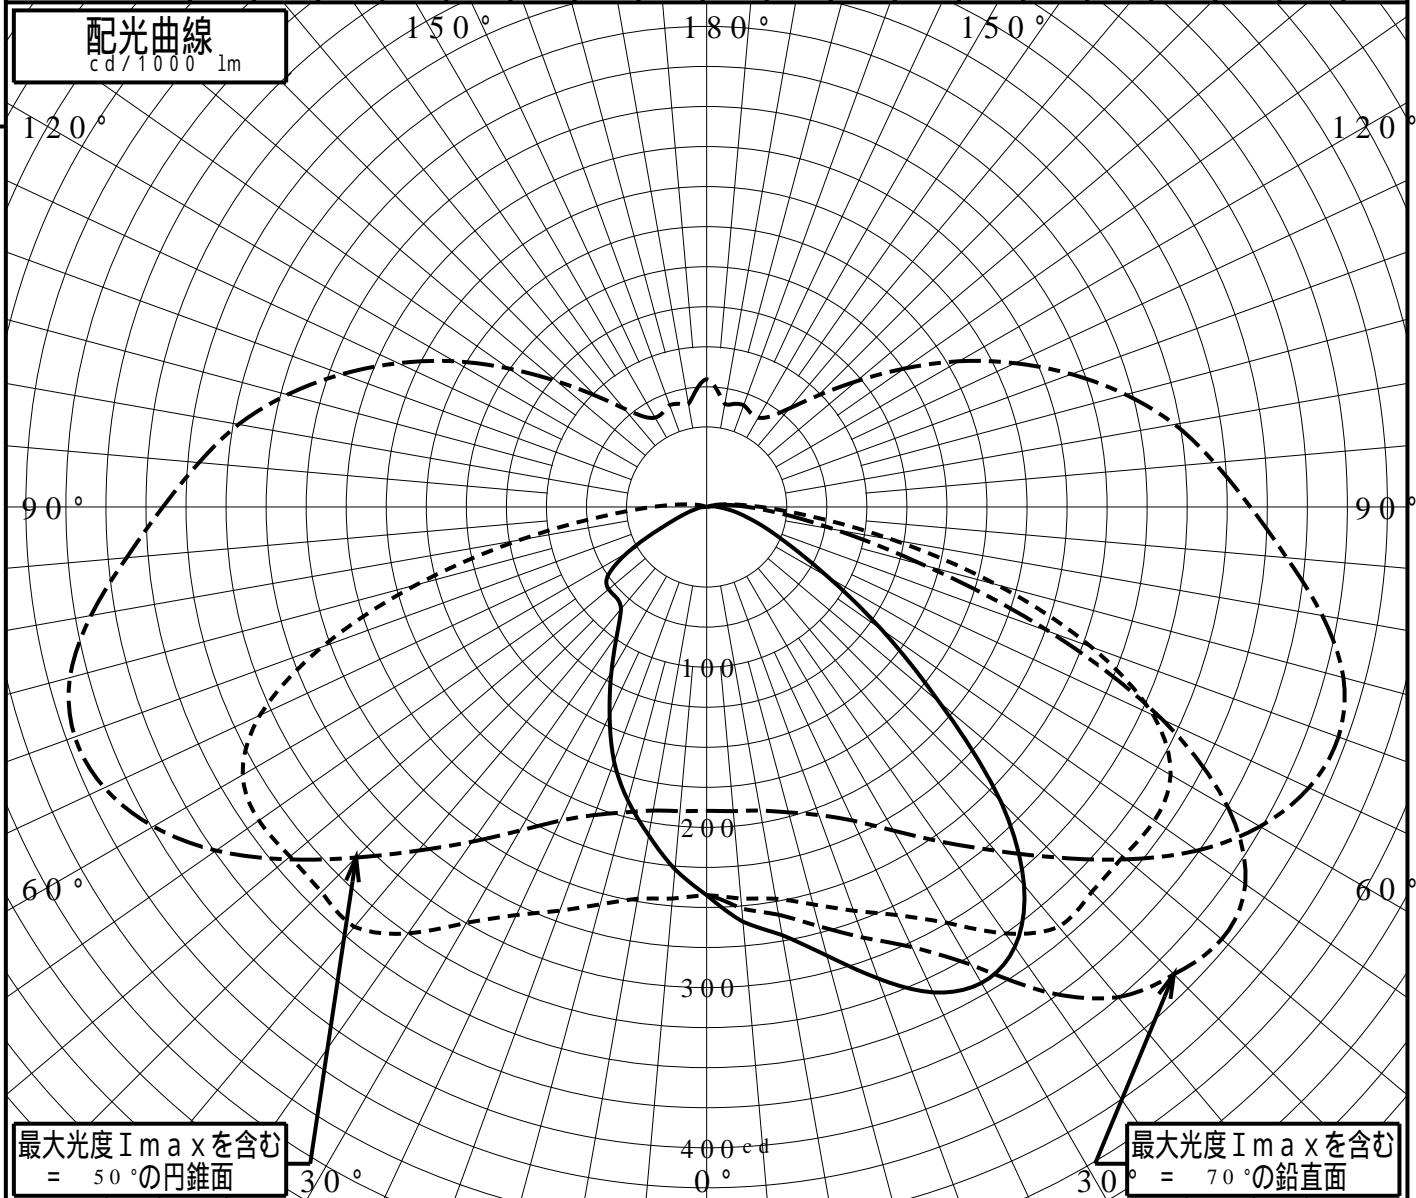

道路・トンネル照明率曲線

品番(品名)

NNY22561K

光源

LED5000_70_13000 x1


管理番号

K0144743 (0)DB 1

————— = 0.0°

H: 取付高さ

照明率(= 0°)		
幅	歩道側	車道側
0.0H	0.000	0.000
0.2H	0.105	0.119
0.4H	0.187	0.243
0.6H	0.244	0.357
0.8H	0.279	0.444
1.0H	0.302	0.504
1.2H	0.317	0.542
1.4H	0.327	0.565
1.6H	0.334	0.579
1.8H	0.339	0.589
2.0H	0.342	0.595
2.2H	0.344	0.600
2.4H	0.346	0.604
2.6H	0.347	0.606
2.8H	0.348	0.609
3.0H	0.349	0.610
3.2H	0.350	0.612
3.4H	0.350	0.613
3.6H	0.351	0.614

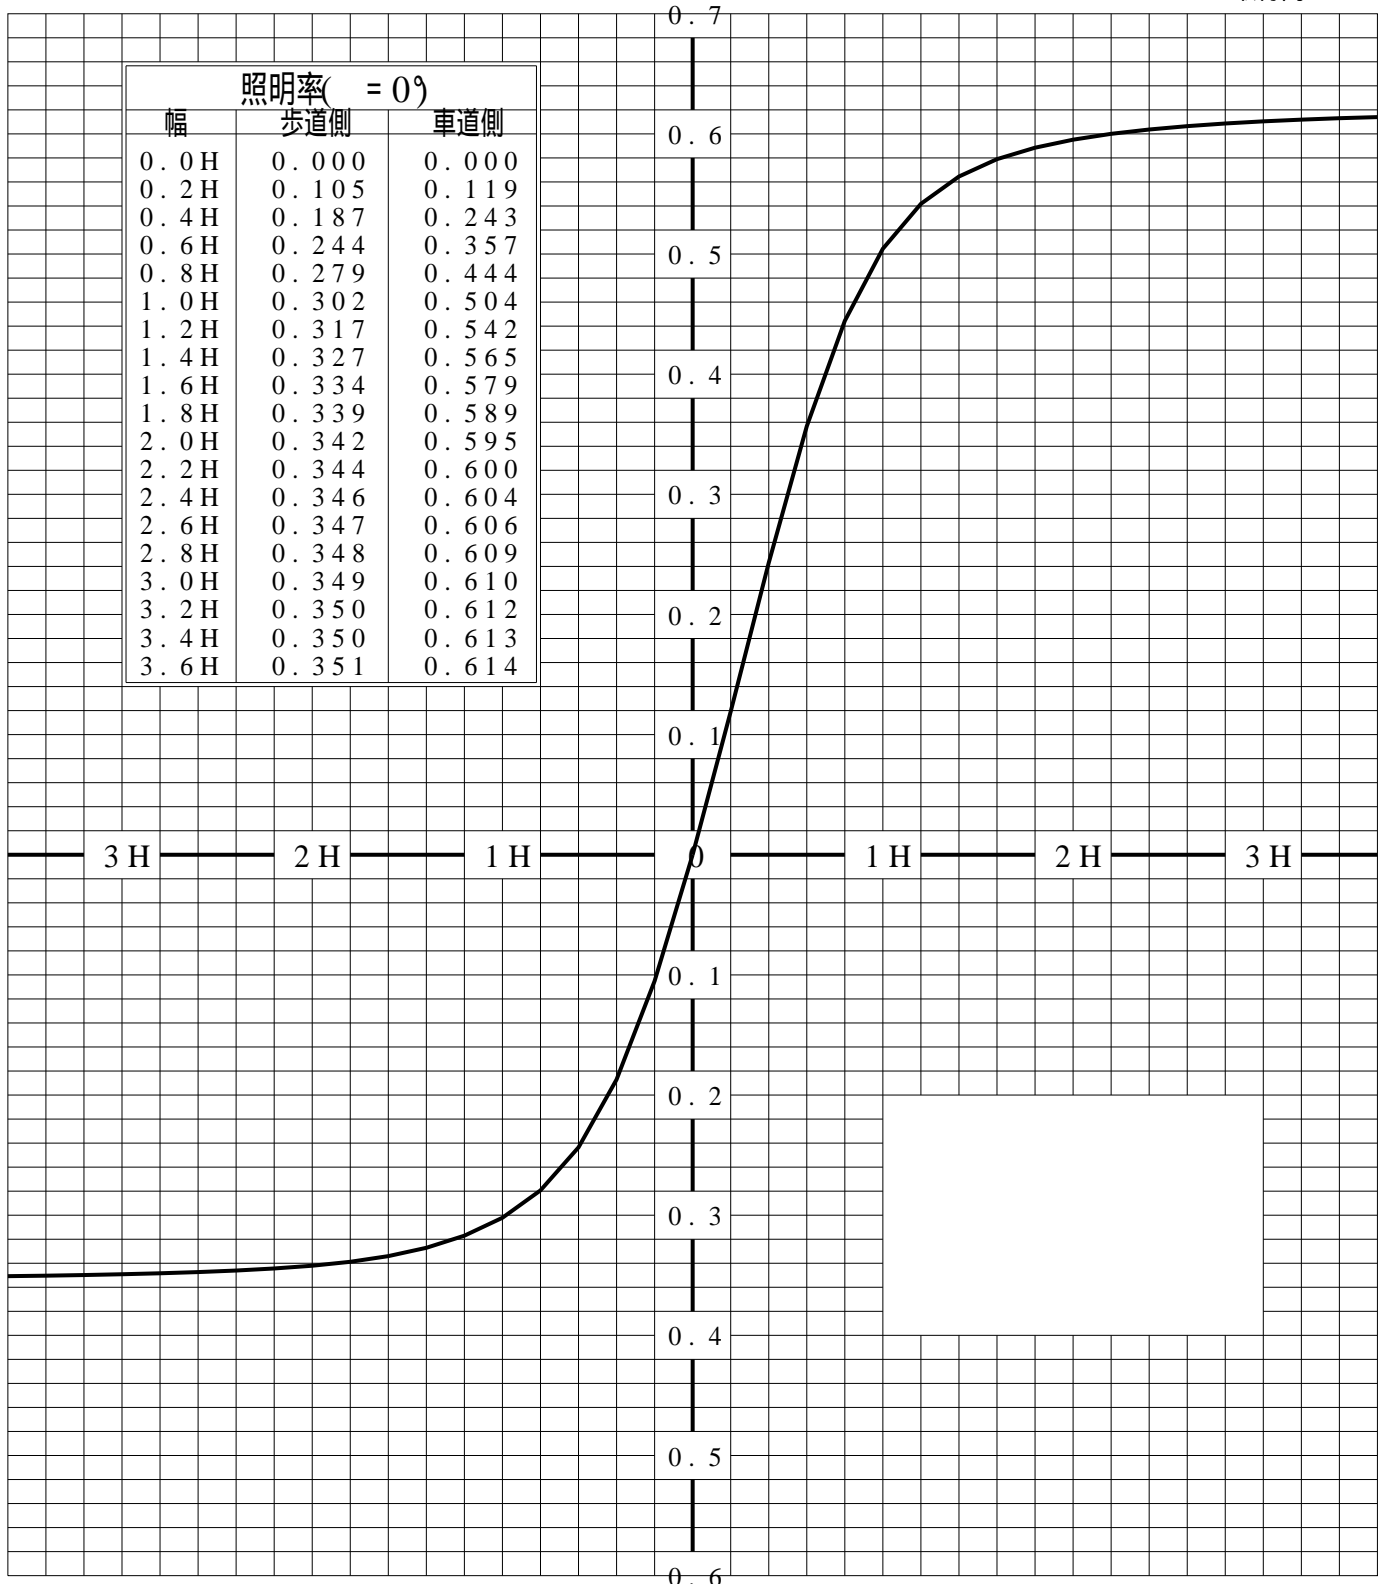

3 H

2 H

1 H

0

1 H

2 H

3 H

歩道側



車道側

正弦等光度曲線

品番(品名)	NNY22561K	光源	LED5000_70_13000 x1
管理番号	K0144743(0)DB1		

