

# 屋外照明器具特性

品番(品名)	XYG0010N																		
光源	LED5000_70_690 x1	690.0 lm																	
管理番号	K0172103(0)DR1																		
JISC8131-1999 による配光形式																			
器具効率	100.0%	直下光度	0.0 cd/1000lm																
上方光束	18.4%	最大光度	233.5 cd/1000lm																
下方光束	81.7%																		
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°
=0°鉛直面	0	1	2	4	16	77	135	168	200	233	231	217	196	162	116	89	63	43	34
90°	0	1	2	4	16	77	135	168	200	233	231	217	196	162	116	89	63	43	34
180°	0	1	2	4	16	77	135	168	200	233	231	217	196	162	116	89	63	43	34
270°	0	1	2	4	16	77	135	168	200	233	231	217	196	162	116	89	63	43	34
I <sub>max</sub> を含む鉛直面	0	1	2	4	16	77	135	168	200	233	231	217	196	162	116	89	63	43	34




# 道路・トンネル照明率曲線

品番(品名)	XYG0010N	光源	LED5000_70_690 ×1
管理番号	K0172103 (0)DR 1		

————— = 0.0°

H: 取付高さ

照明率( = 0°)		
幅	歩道側	車道側
0.0H	0.000	0.000
0.2H	0.042	0.042
0.4H	0.087	0.087
0.6H	0.138	0.138
0.8H	0.189	0.189
1.0H	0.232	0.232
1.2H	0.267	0.267
1.4H	0.294	0.294
1.6H	0.314	0.314
1.8H	0.330	0.330
2.0H	0.341	0.341
2.2H	0.351	0.351
2.4H	0.358	0.358
2.6H	0.363	0.363
2.8H	0.368	0.368
3.0H	0.371	0.371
3.2H	0.374	0.374
3.4H	0.377	0.377
3.6H	0.379	0.379

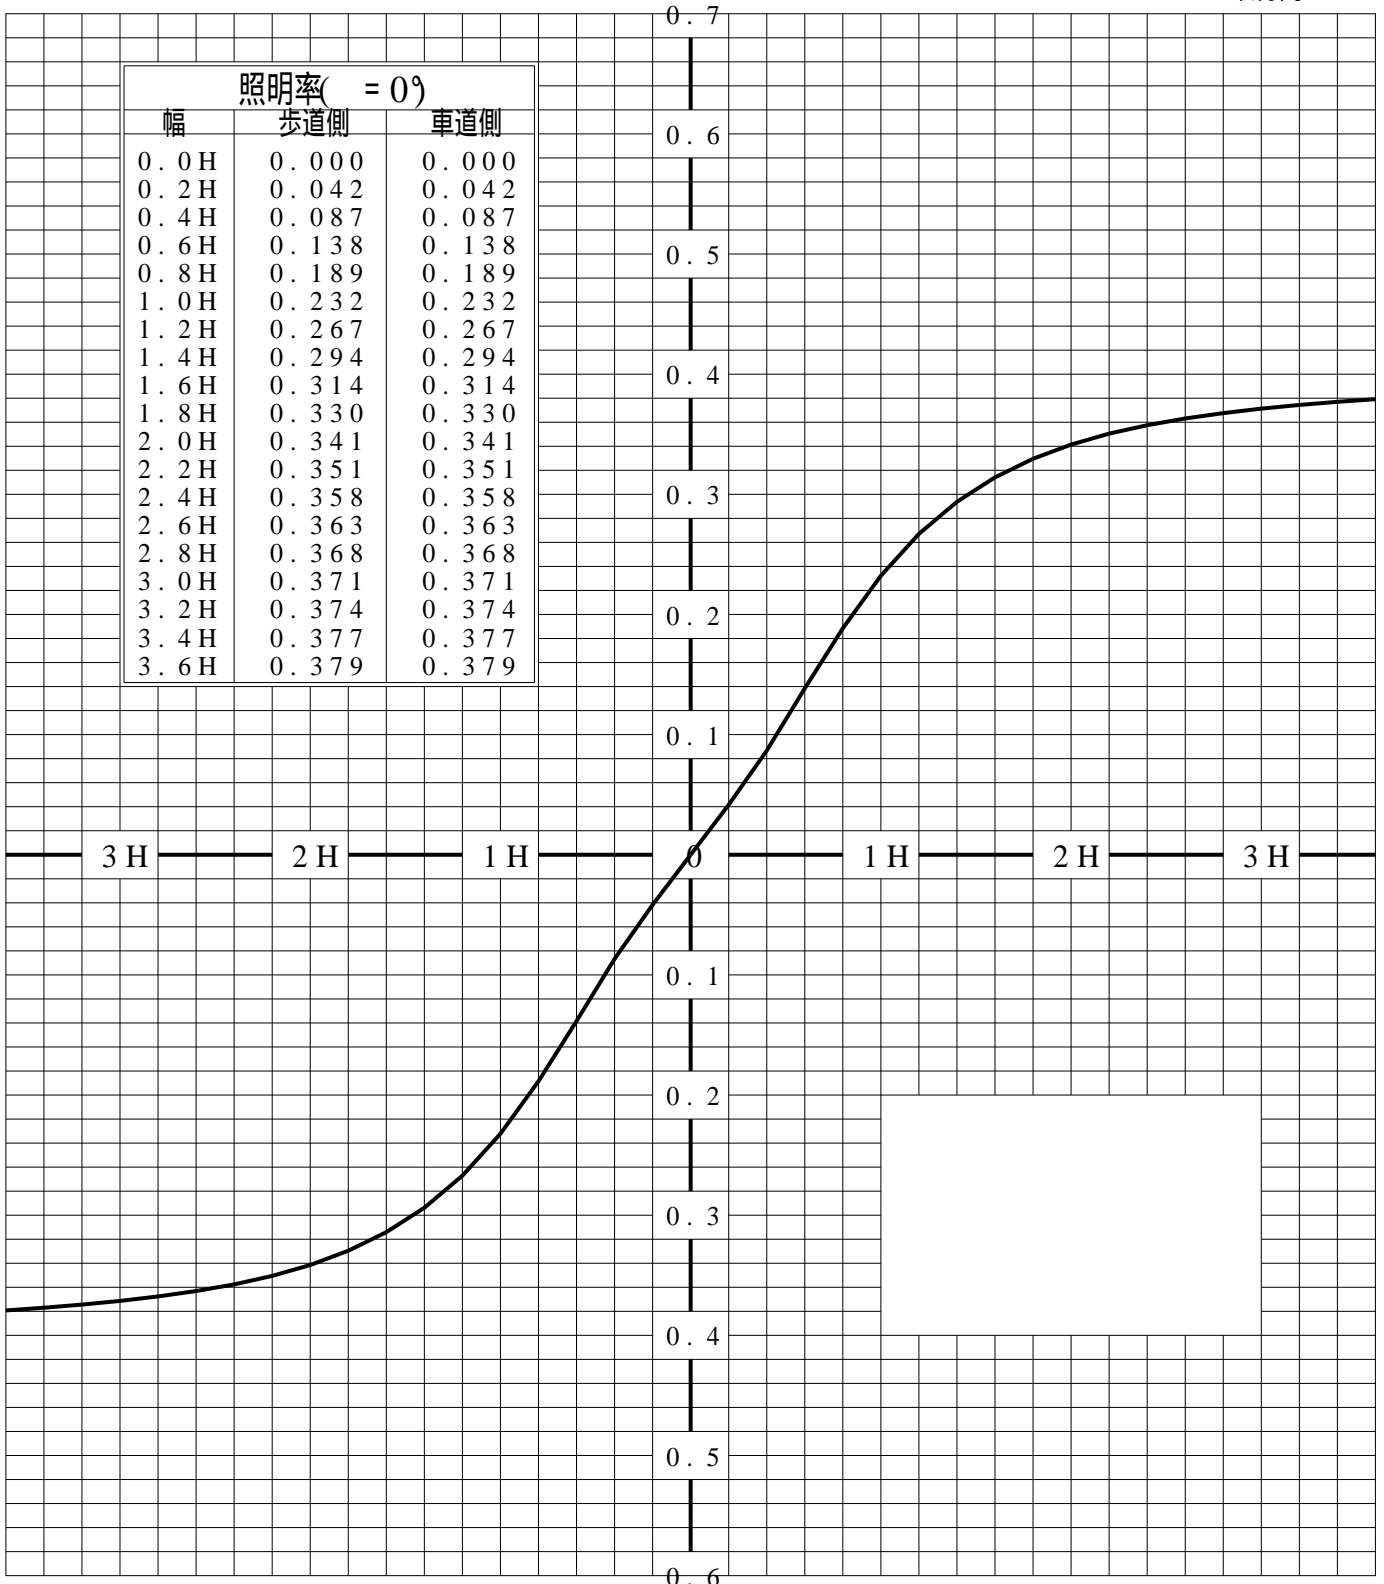

歩道側 ← ————— → 車道側