

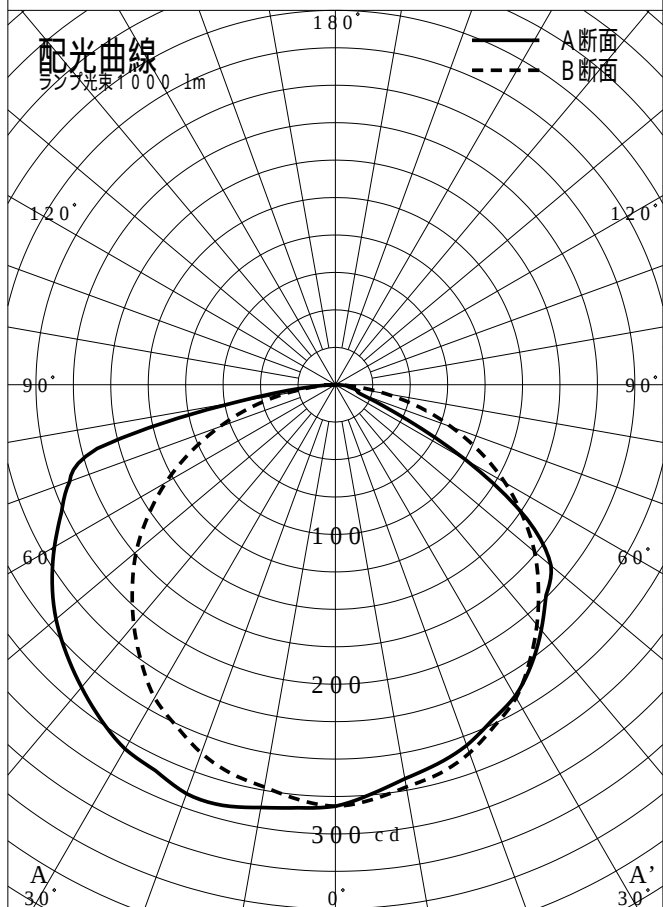


非常用照明器具特性

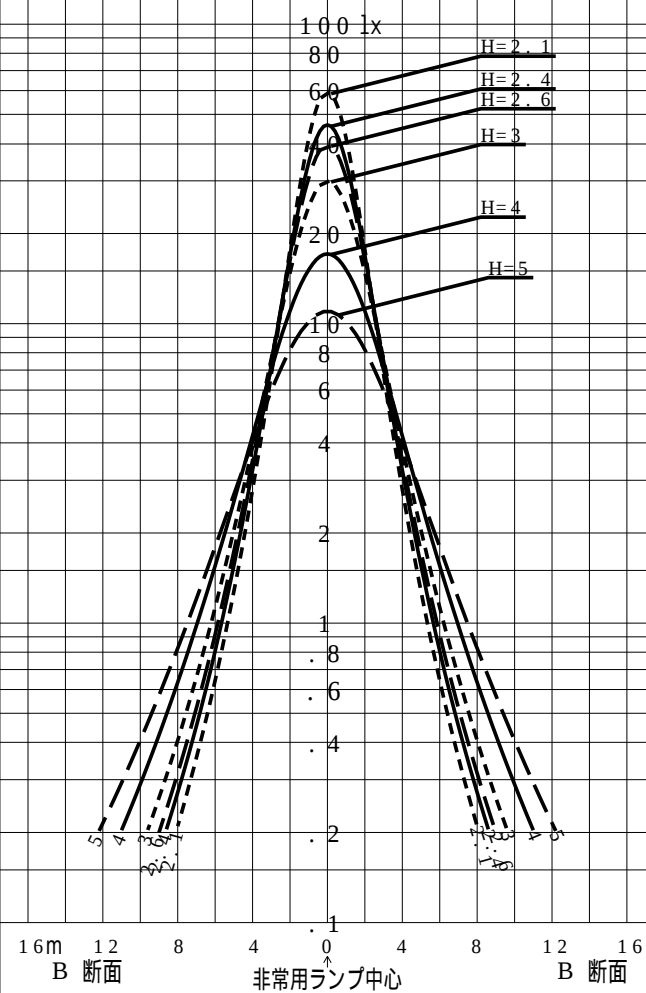

品番	NNF G4 2 9 9 2 J		
名称			
光源	LDL40S. N/ 19/ 25 - K(1400)		
管理番号	K0137537(0) DR1		
光束	1400lm x 1.00		
保守率	0.77		
適用品番	設計照度Eを得るための読取照度		
	E = 2.0	E = 1.0	E = 0.5
NNF G4 2 9 9 2 J	1.9	0.9	0.5
備考	非常点灯時の照度 (30 分後)		

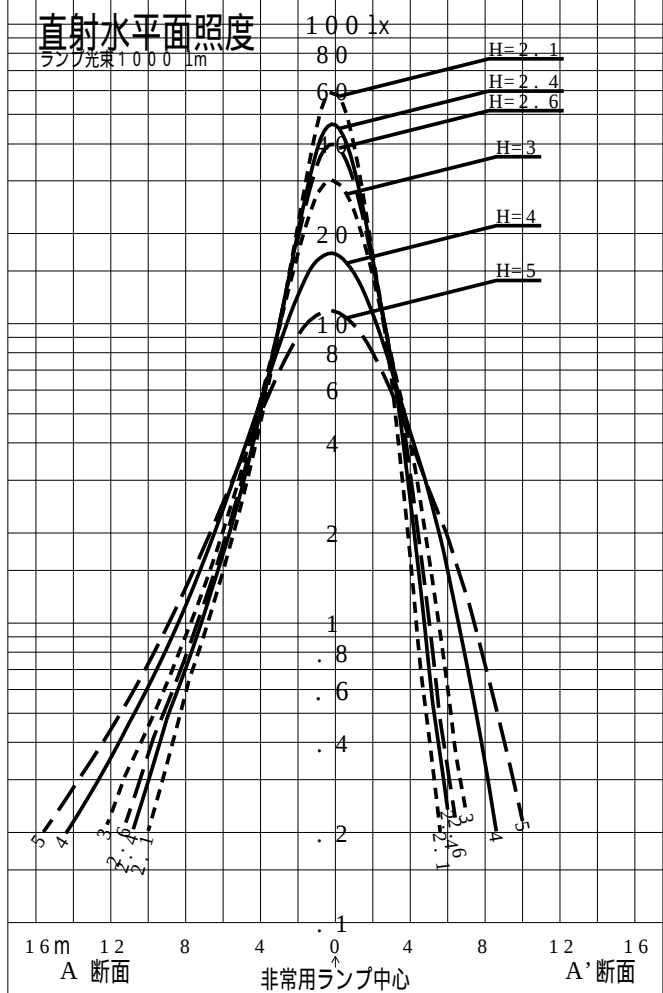

品番	NNF G4 2 9 9 2 J				
名称					
光源	L DL 4 0 S . N / 1 9 / 2 5 - K (1 4 0 0)				
管理番号	K 0 1 3 7 5 3 7 (0) DR 1				
光束	1 4 0 0 . 0 l m * 1 . 0 0			備考	非常点灯時の照度 (3 0 分後)
保守率	0 . 7 7				

非常灯配置表

器具取付高さ (m)		2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2	3.3	3.4	3.5	3.6
単体配置	A1	5.6	5.7	5.8	5.8	5.9	6.0	6.0	6.1	6.2	6.2	6.3	6.3	6.4	6.4	6.5	6.5
	A' 1	3.9	4.1	4.2	4.3	4.4	4.5	4.6	4.7	4.8	4.9	5.0	5.1	5.2	5.2	5.3	5.4
	B1	4.5	4.6	4.7	4.8	4.8	4.9	5.0	5.1	5.1	5.2	5.2	5.3	5.3	5.4	5.4	5.5
直線配置	A2	10.9	11.2	11.4	11.7	11.9	12.1	12.4	12.6	12.8	13.0	13.2	13.4	13.7	13.8	14.0	14.2
	B2	10.6	10.9	11.1	11.3	11.5	11.7	11.9	12.0	12.2	12.4	12.6	12.7	12.9	13.1	13.2	13.4
四角配置	A4	9.8	10.0	10.2	10.4	10.6	10.8	11.0	11.1	11.3	11.5	11.6	11.8	12.1	12.2	12.4	12.6
	B4	9.8	10.1	10.4	10.6	10.8	11.0	11.2	11.4	11.6	11.8	12.0	12.2	12.2	12.4	12.6	12.7
壁からの距離 (最大)	A0	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.4	2.4	2.5	2.6	2.6	2.5	2.6
	B0	2.8	3.0	3.0	3.1	3.1	3.3	3.3	3.4	3.4	3.6	3.6	3.7	3.5	3.6	3.7	3.7

器具取付高さ (m)		3.7	3.8	3.9	4.0	4.1	4.2	4.3	4.4	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
単体配置	A1	6.6	6.6	6.6	6.7	6.7	6.8	6.8	6.8	6.8	7.0	7.0	7.0	7.0	7.0	6.8	6.7
	A' 1	5.5	5.6	5.6	5.7	5.8	5.8	5.8	5.9	5.9	6.1	6.2	6.2	6.1	6.1	6.0	5.8
	B1	5.5	5.6	5.6	5.7	5.7	5.7	5.8	5.8	5.8	5.9	6.0	6.0	6.0	6.0	5.9	5.8
直線配置	A2	14.4	14.6	14.8	14.9	15.1	15.2	15.4	15.6	15.7	16.4	17.0	17.5	18.0	18.2	18.5	18.6
	B2	13.5	13.7	13.8	14.0	14.1	14.2	14.3	14.5	14.6	15.1	15.5	15.9	16.2	16.5	16.7	16.8
四角配置	A4	12.7	13.0	13.0	13.2	13.4	13.5	13.6	13.8	14.0	14.7	15.4	16.1	16.7	17.4	17.6	17.8
	B4	13.0	13.0	13.3	13.4	13.5	13.7	13.8	13.9	14.0	14.6	15.1	15.4	15.8	15.8	16.2	16.5
壁からの距離 (最大)	A0	2.5	2.6	2.5	2.4	2.6	2.5	2.3	2.4	2.4	2.2	2.3	2.2	2.0	2.5	2.0	1.8
	B0	3.8	3.7	3.8	3.9	3.8	4.0	3.9	3.9	4.0	4.0	3.8	3.8	3.5	2.8	2.8	2.6

器具取付高さ (m)		8.5	9.0	9.5	10.0	10.5	11.0	11.5	12.0								
単体配置	A1	6.5	6.3	6.0	5.7	5.2	4.6	4.0	2.8								
	A' 1	5.6	5.4	5.0	4.6	4.1	3.5	2.6	1.4								
	B1	5.6	5.4	5.1	4.7	4.3	3.7	2.9	1.7								
直線配置	A2	18.6	18.5	18.4	18.2	18.0	17.8	17.4	17.1								
	B2	16.8	16.8	16.8	16.6	16.5	16.2	15.9	15.6								
四角配置	A4	18.1	18.2	18.4	18.2	18.0	17.8	17.4	17.1								
	B4	16.6	16.8	16.8	16.6	16.5	16.2	15.9	15.6								
壁からの距離 (最大)	A0	1.5	1.0	1.1	1.0	1.1	1.0	1.1	1.2								
	B0	2.1	2.0	1.3	1.4	1.4	1.2	1.4	1.2								