

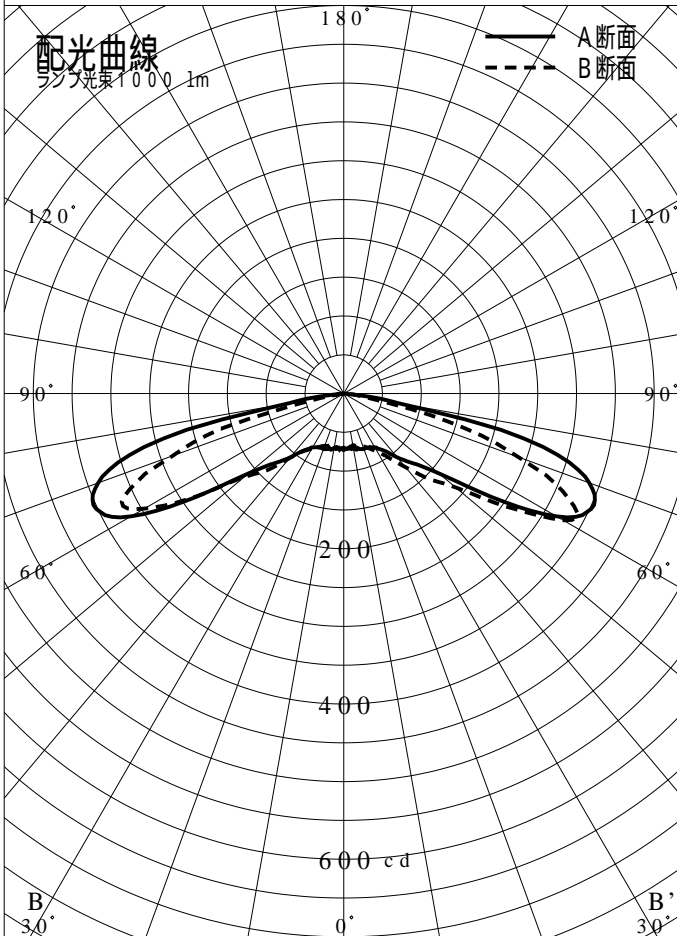


# 非常用照明器具特性

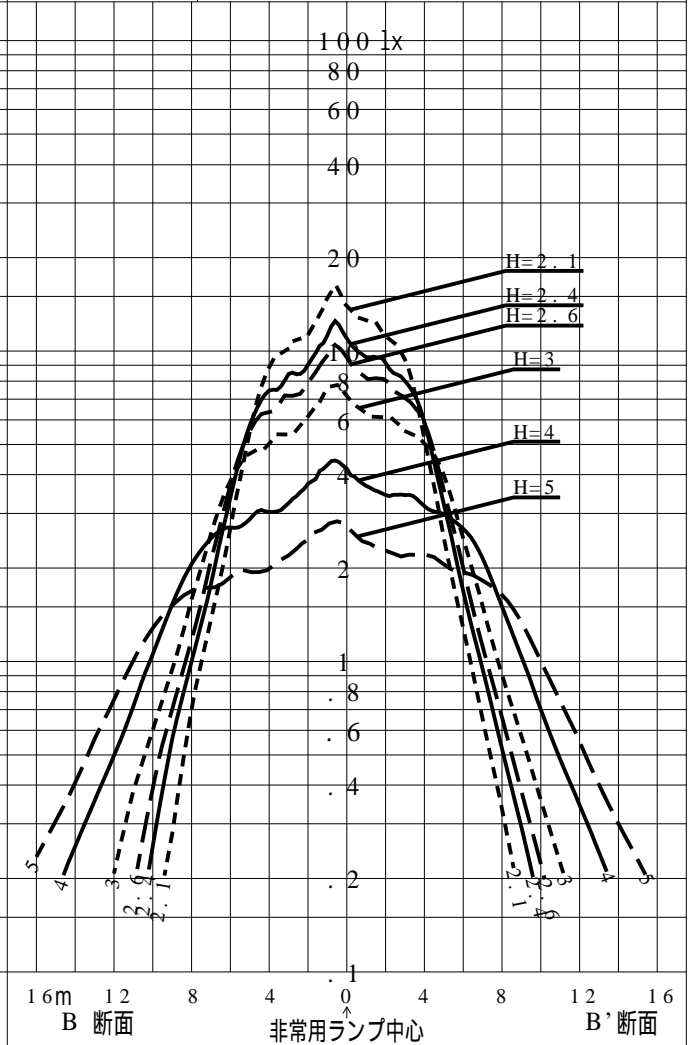

品番	XLG442RGNJ		
名称			
光源	LED5000/98/905		
管理番号	K0173525(0)DR1		
光束	9051m x 1.00		
保守率	0.88		
適用品番	設計照度Eを得るための読取照度		
	E=2.0	E=1.0	E=0.5
XLG442RGNJ	2.5	1.3	0.6
備考	非常点灯時の照度(30分後)		

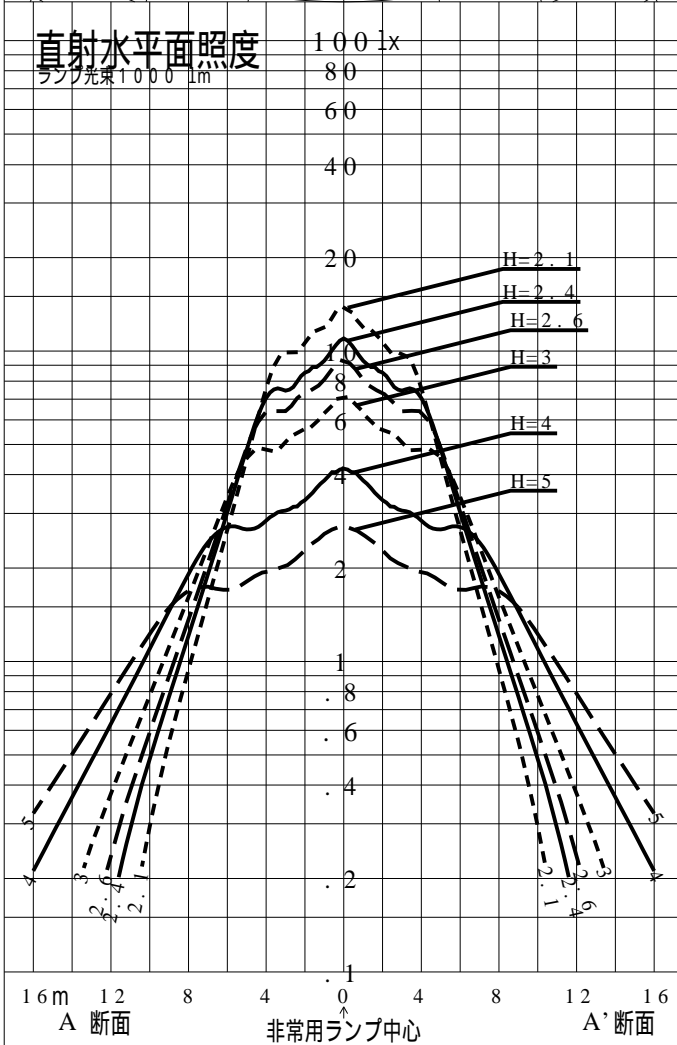

品番	XLG442RGNJ				
名称					
光源	LED5000/98/905				
管理番号	K0173525(0)DR 1				
光束	905.0 1m * 1.00			備考	非常点灯時の照度 (30分後)
保守率	0.88				

非常灯配置表

器具取付高さ (m)		2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2	3.3	3.4	3.5	3.6
単体配置	A1	6.1	6.2	6.3	6.4	6.5	6.6	6.7	6.7	6.8	6.8	6.9	6.9	7.0	7.0	7.0	7.0
	B1	6.1	6.2	6.4	6.5	6.6	6.7	6.8	6.9	7.0	7.1	7.1	7.2	7.3	7.3	7.3	7.3
	B'1	5.0	5.2	5.3	5.4	5.5	5.6	5.7	5.8	5.9	6.0	6.1	6.2	6.2	6.3	6.4	6.4
直線配置	A2	14.7	15.0	15.4	15.7	16.0	16.2	16.5	16.8	17.0	17.2	17.4	17.6	17.8	18.0	18.2	18.3
	B2	13.1	13.4	13.7	14.0	14.3	14.6	14.9	15.2	15.5	15.7	16.0	16.3	16.5	16.8	17.0	17.2
四角配置	A4	13.3	13.6	13.9	14.2	14.6	14.8	15.2	15.4	15.7	16.0	16.2	16.3	16.6	16.8	17.0	17.3
	B4	11.1	11.4	11.8	12.0	12.2	12.6	12.7	13.0	13.2	13.4	13.7	14.0	14.2	14.4	14.7	14.8
壁からの距離 (最大)	A0	4.3	4.4	4.5	4.5	4.7	4.7	4.8	4.8	4.9	5.0	5.1	5.0	5.0	5.0	5.1	5.1
	B0	3.0	3.0	3.1	3.1	3.1	3.2	3.2	3.1	3.1	3.2	3.1	3.2	3.2	3.1	3.1	3.1

器具取付高さ (m)		3.7	3.8	3.9	4.0	4.1	4.2	4.3	4.4	4.5	5.0						
単体配置	A1	7.0	7.0	6.9	6.8	6.6	4.5	4.2	3.8	2.9	----						
	B1	7.3	7.2	7.1	7.0	6.8	5.6	5.3	5.1	3.5	----						
	B'1	6.5	6.5	6.5	6.4	6.3	6.1	5.8	5.4	4.6	----						
直線配置	A2	18.5	18.6	18.8	18.9	19.0	19.1	19.2	19.3	19.4	17.0						
	B2	17.4	17.6	17.8	18.0	18.2	18.3	18.5	18.6	18.7	16.2						
四角配置	A4	17.4	17.6	17.8	18.0	18.2	18.2	18.5	18.6	18.6	17.0						
	B4	15.1	15.3	15.5	15.7	15.8	16.2	16.2	16.4	16.8	16.2						
壁からの距離 (最大)	A0	5.2	5.2	5.2	5.1	5.1	4.9	4.4	4.0	3.4	1.0						
	B0	3.0	2.9	2.8	2.9	2.6	2.8	2.7	2.5	2.6	1.0						

器具取付高さ (m)																	
単体配置																	
直線配置																	
四角配置																	
壁からの距離 (最大)																	