


屋内照明器具特性	
品番 (品名)	LGW80011U
光源	LDA4L-H-E17/S/4 ×1 440.0lm
管理番号	K0183095(0)DR1
BZ分類	BZ10

器具効率	26%	天井	80%				70%				50%				30%				0%		
	上方光束		26%	反射率	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	0%
	下方光束		0%		床	10%				10%				10%				10%			
		室指数	照明率 (X0.01)																ZCM		
保守率	良	0.63	0.6	11	8	6	5	9	7	6	5	6	5	4	3	3	3	2	2	0	
	中	0.6	0.8	13	10	8	7	11	9	7	6	7	6	5	4	4	3	3	2	0	
	否	0.56	1.0	14	12	10	9	12	10	9	8	8	7	6	5	4	4	3	3	0	
				1.25	15	13	12	10	13	11	10	9	9	8	7	6	5	4	4	4	0
下方投影面積	cm ²		1.5	16	14	13	12	14	12	11	10	9	8	8	7	5	5	4	4	0	
	等価発光面積		cm ²	2.0	18	16	15	13	15	14	13	12	10	9	9	8	6	5	5	5	0
取付高さ	器具間隔最大限		2.5	18	17	16	15	16	15	14	13	11	10	9	9	6	6	5	5	0	
	横方向 (A)	縦方向 (B)	3.0	19	18	17	16	16	15	14	14	11	10	10	9	6	6	6	5	0	
Hm	0.20Hm	0.20Hm	4.0	20	19	18	17	17	16	15	15	12	11	11	10	7	6	6	6	0	
			5.0	20	19	19	18	17	17	16	15	12	11	11	11	7	7	6	6	0	
			7.0	21	20	19	19	18	17	17	16	12	12	12	11	7	7	7	7	0	
			10.0	21	21	20	20	18	18	17	17	12	12	12	12	7	7	7	7	0	

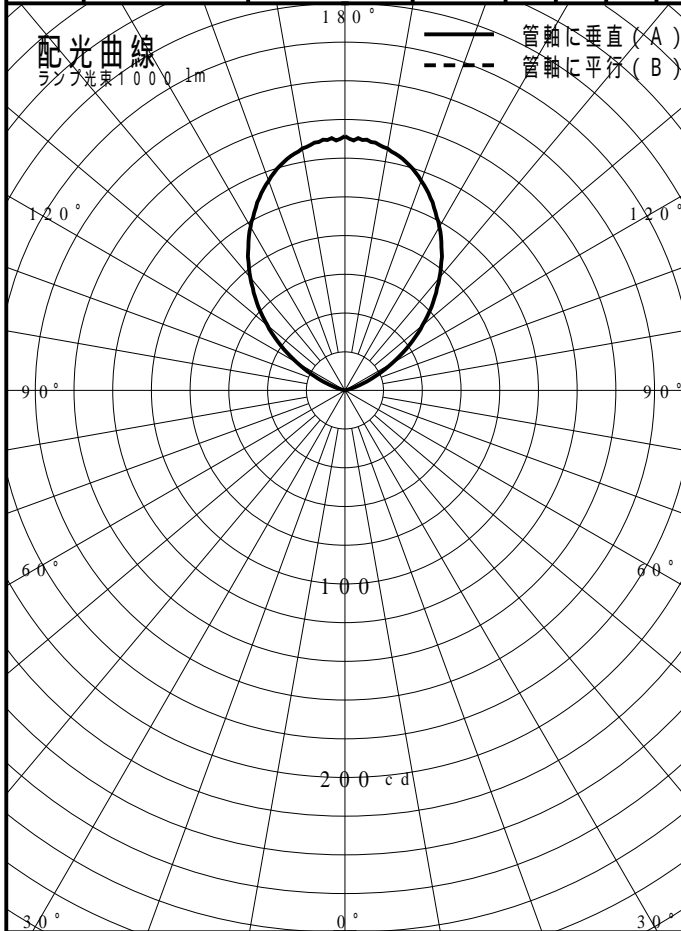

直射水平面照度	80 lx																			
	60																			
	40																			
	20																			
	10																			
	8																			
	6																			
	4																			
	2																			
	.8																			
	.6																			
	.4																			
	.2																			
		8m	6	4	2	0	2	4	6	8										