

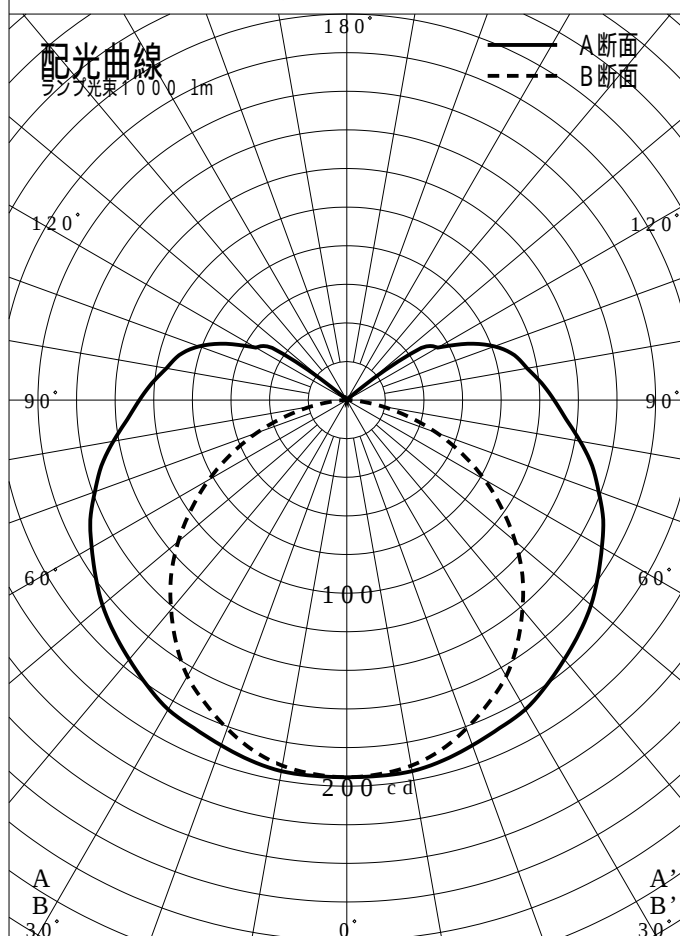


非常用照明器具特性

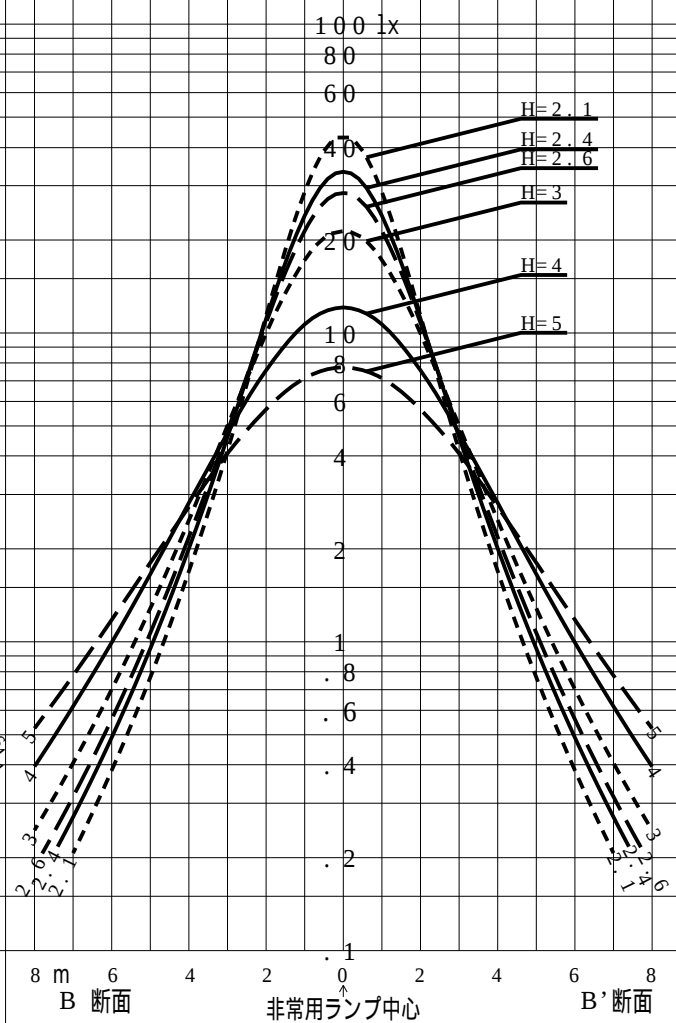

品番	NNF G2 1002 J		
名称			
光源	LDL20S. N/ 11/ 12K(620)		
管理番号	K0148322(5) DY1		
光束	620lm x 1.00		
保守率	0.81		
適用品番	設計照度Eを得るための読取照度		
	E = 2.0	E = 1.0	E = 0.5
NNFG21002J	4.0	2.0	1.0
備考	非常点灯時の照度 (30 分後)		

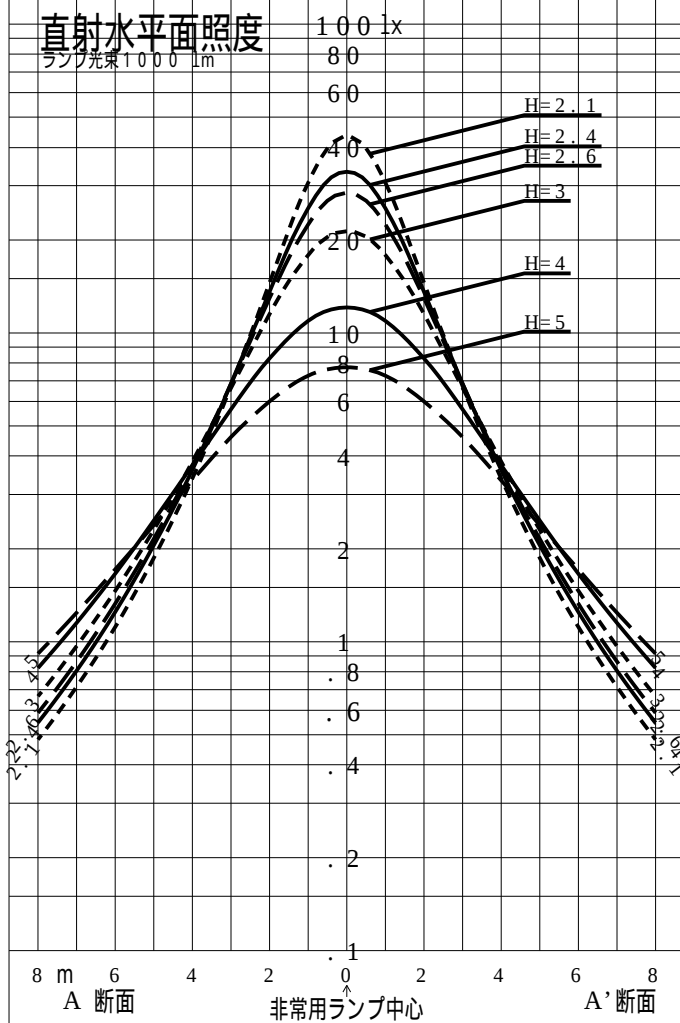

品番	NNF G2 1 0 0 2 J			
名称				
光源	L DL20S. N/ 11 / 12 K(620)			
管理番号	K0 1 4 8 3 2 2 (5) DY 1			
光束	620.0 l m * 1.00		備考	非常点灯時の照度 (30分後)
保守率	0.81			

非常灯配置表

器具取付高さ (m)		2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2	3.3	3.4	3.5	3.6
単体配置	A1	3.8	3.8	3.8	3.9	3.9	3.9	3.9	3.9	3.9	3.9	4.0	4.0	4.0	4.0	3.9	3.9
	A' 1	3.8	3.8	3.8	3.9	3.9	3.9	3.9	3.9	3.9	3.9	4.0	4.0	4.0	4.0	3.9	3.9
	B1	3.1	3.1	3.1	3.2	3.2	3.2	3.3	3.3	3.3	3.3	3.4	3.4	3.4	3.4	3.4	3.4
	B' 1	3.1	3.1	3.1	3.2	3.2	3.2	3.3	3.3	3.3	3.3	3.4	3.4	3.4	3.4	3.4	3.4
直線配置	A2	9.5	9.5	9.8	9.8	10.0	10.0	10.2	10.2	10.3	10.3	10.4	10.6	10.5	10.6	10.7	10.8
	B2	7.6	7.7	7.9	8.0	8.1	8.2	8.3	8.4	8.5	8.6	8.7	8.7	8.8	8.9	9.0	9.0
四角配置	A4	9.0	9.3	9.4	9.4	9.5	9.7	9.8	9.8	9.9	10.1	10.2	10.2	10.2	10.3	10.4	10.6
	B4	7.4	7.4	7.5	7.7	7.8	7.8	7.9	8.1	8.2	8.2	8.3	8.4	8.5	8.6	8.6	8.6
壁からの距離 (最大)	A0	1.8	2.0	2.1	1.9	1.9	2.1	2.1	1.9	1.9	2.0	2.2	2.1	1.9	1.8	1.9	2.0
	B0	1.6	1.6	1.5	1.6	1.6	1.5	1.5	1.6	1.7	1.6	1.4	1.5	1.6	1.6	1.4	1.4

器具取付高さ (m)		3.7	3.8	3.9	4.0	4.1	4.2	4.3	4.4	4.5	5.0	5.5	6.0	6.5			
単体配置	A1	3.9	3.9	3.9	3.9	3.8	3.8	3.8	3.8	3.7	3.5	3.2	2.7	2.0			
	A' 1	3.9	3.9	3.9	3.9	3.8	3.8	3.8	3.8	3.7	3.5	3.2	2.7	2.0			
	B1	3.4	3.4	3.4	3.4	3.3	3.3	3.3	3.3	3.3	3.1	2.8	2.4	1.8			
	B' 1	3.4	3.4	3.4	3.4	3.3	3.3	3.3	3.3	3.3	3.1	2.8	2.4	1.8			
直線配置	A2	10.8	10.7	10.8	10.8	10.9	10.9	10.9	11.0	11.0	10.9	10.8	10.5	10.2			
	B2	9.1	9.1	9.2	9.2	9.3	9.3	9.3	9.3	9.4	9.4	9.4	9.2	9.0			
四角配置	A4	10.6	10.6	10.6	10.7	10.7	10.8	10.9	11.0	11.0	10.9	10.8	10.5	10.2			
	B4	8.7	8.8	8.9	9.0	9.0	9.0	9.0	9.0	9.1	9.4	9.4	9.2	9.0			
壁からの距離 (最大)	A0	2.1	1.8	1.7	1.8	1.7	1.7	1.8	1.8	1.7	1.0	1.2	1.0	1.2			
	B0	1.3	1.3	1.4	1.4	1.3	1.2	1.0	1.1	1.1	1.0	1.1	1.0	1.1			

器具取付高さ (m)																	
単体配置																	
直線配置																	
四角配置																	
壁からの距離 (最大)																	