



非常用照明器具特性

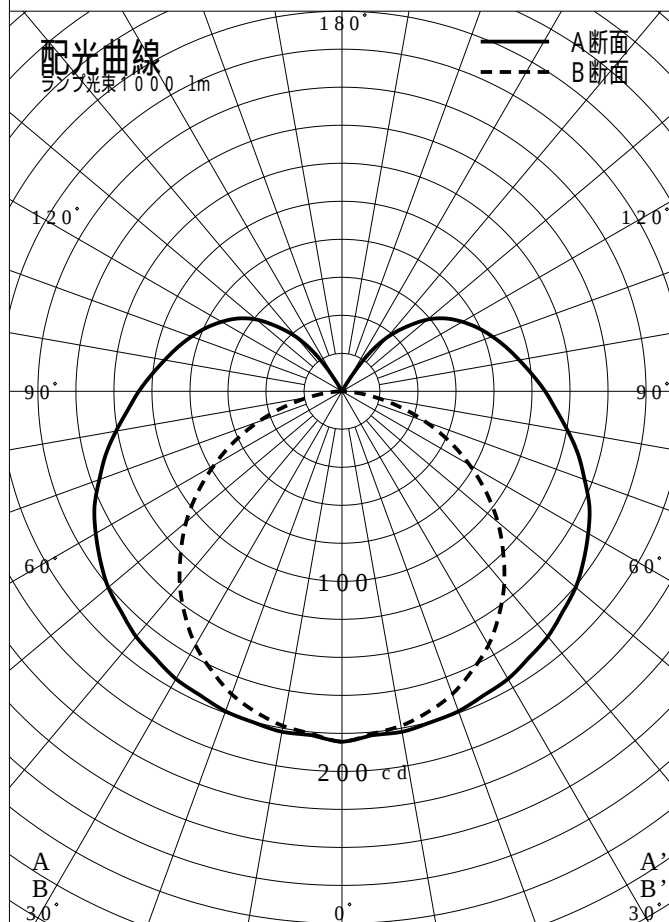

品番	NWF G4 1 0 0 1		
名称			
光源	LDL40S. N/ 29/ 38K(1900)		
管理番号	K0148309(1) DY1		
光束	1900lm x 1.00		
保守率	0.81		
適用品番	設計照度Eを得るための読取照度		
	E = 2.0	E = 1.0	E = 0.5
NWF G4 1 0 0 1	1.3	0.6	0.3
備考	非常点灯時の照度 (30 分後)		

直射水平面照度

ランプ光束1000lm

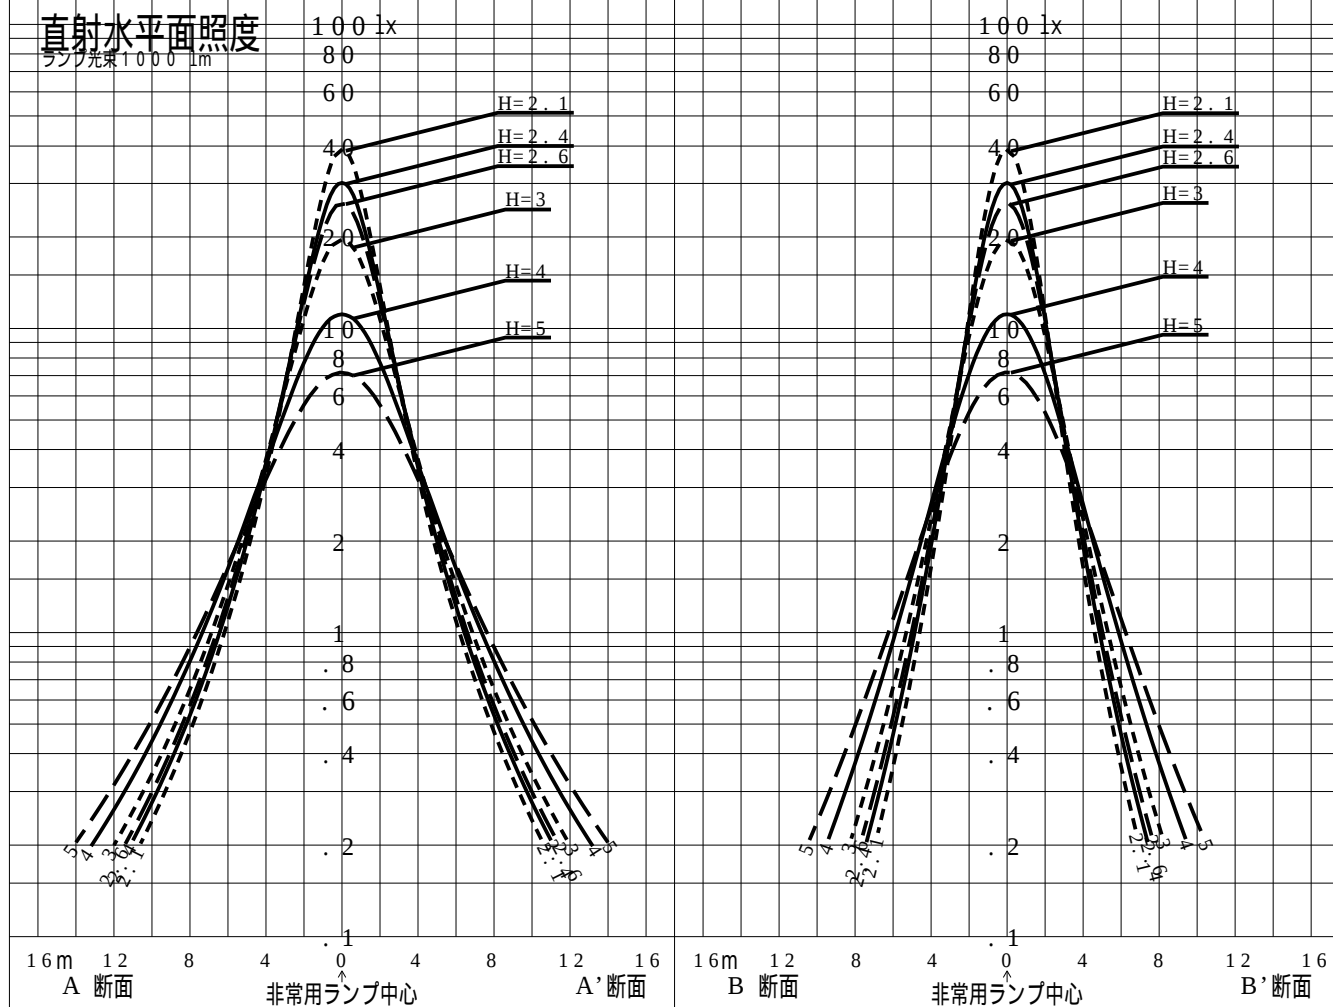

品番	NWF G4 1 0 0 1				
名称					
光源	L DL40 S. N/ 29/ 38 K(1900)				
管理番号	K0 1 4 8 3 0 9 (1) DY 1				
光束	1900.0 l m * 1.00			備考	非常点灯時の照度 (30分後)
保守率	0.81				

非常灯配置表

器具取付高さ (m)		2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2	3.3	3.4	3.5	3.6
単体配置	A1	5.7	5.7	5.8	5.9	6.0	6.0	6.1	6.1	6.2	6.3	6.3	6.3	6.4	6.4	6.5	6.5
	A' 1	5.7	5.7	5.8	5.9	6.0	6.0	6.1	6.1	6.2	6.3	6.3	6.3	6.4	6.4	6.5	6.5
	B1	4.3	4.4	4.5	4.5	4.6	4.7	4.7	4.8	4.9	4.9	5.0	5.0	5.1	5.1	5.2	5.2
	B' 1	4.3	4.4	4.5	4.5	4.6	4.7	4.7	4.8	4.9	4.9	5.0	5.0	5.1	5.1	5.2	5.2
直線配置	A2	14.1	14.3	14.6	14.8	15.0	15.1	15.4	15.6	15.7	15.9	16.0	16.1	16.4	16.5	16.6	16.8
	B2	10.4	10.6	10.8	11.0	11.2	11.4	11.6	11.8	11.9	12.1	12.3	12.4	12.6	12.7	12.9	13.0
四角配置	A4	13.1	13.4	13.5	13.8	13.8	14.1	14.2	14.4	14.6	14.7	14.9	15.0	15.3	15.4	15.5	15.7
	B4	10.4	10.6	10.8	11.0	11.2	11.4	11.6	11.7	11.9	12.0	12.1	12.3	12.4	12.5	12.6	12.7
壁からの距離 (最大)	A0	3.3	3.3	3.2	3.2	3.1	3.0	2.9	2.8	3.0	2.8	3.0	3.1	3.2	3.3	3.1	3.1
	B0	2.5	2.5	2.7	2.5	2.7	2.6	2.7	2.7	2.7	2.8	2.9	2.8	2.8	2.8	2.8	2.8

器具取付高さ (m)		3.7	3.8	3.9	4.0	4.1	4.2	4.3	4.4	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
単体配置	A1	6.5	6.6	6.6	6.6	6.7	6.7	6.7	6.7	6.7	6.8	6.8	6.8	6.7	6.6	6.5	6.2
	A' 1	6.5	6.6	6.6	6.6	6.7	6.7	6.7	6.7	6.7	6.8	6.8	6.8	6.7	6.6	6.5	6.2
	B1	5.3	5.3	5.3	5.4	5.4	5.4	5.5	5.5	5.5	5.6	5.7	5.7	5.7	5.7	5.5	5.4
	B' 1	5.3	5.3	5.3	5.4	5.4	5.4	5.5	5.5	5.5	5.6	5.7	5.7	5.7	5.7	5.5	5.4
直線配置	A2	16.9	17.0	17.2	17.3	17.4	17.5	17.6	17.7	17.8	18.2	18.5	18.8	19.0	19.1	19.2	19.2
	B2	13.2	13.3	13.4	13.6	13.7	13.8	13.9	14.0	14.2	14.6	15.1	15.4	15.7	15.9	16.0	16.1
四角配置	A4	15.8	15.9	16.1	16.2	16.2	16.4	16.6	16.6	16.7	17.2	17.8	18.2	18.5	18.6	18.9	19.0
	B4	12.8	13.0	13.1	13.2	13.4	13.4	13.4	13.6	13.8	14.2	14.5	14.8	15.1	15.4	15.7	15.9
壁からの距離 (最大)	A0	3.2	2.9	3.3	3.3	3.0	3.0	3.3	3.1	3.1	3.2	3.3	3.3	3.2	2.8	2.6	1.9
	B0	2.8	2.9	2.9	2.8	2.9	2.9	2.7	2.8	2.9	2.7	2.5	2.4	2.2	2.1	1.9	1.5

器具取付高さ (m)		8.5	9.0	9.5	10.0	10.5	11.0	11.5									
単体配置	A1	6.0	5.7	5.3	4.8	4.2	3.4	2.2									
	A' 1	6.0	5.7	5.3	4.8	4.2	3.4	2.2									
	B1	5.2	4.9	4.6	4.2	3.7	3.0	1.9									
	B' 1	5.2	4.9	4.6	4.2	3.7	3.0	1.9									
直線配置	A2	19.1	19.0	18.8	18.5	18.2	17.8	17.3									
	B2	16.1	16.1	16.1	15.9	15.7	15.4	15.0									
四角配置	A4	19.1	19.0	18.8	18.5	18.2	17.8	17.3									
	B4	16.1	16.1	16.1	15.9	15.7	15.4	15.0									
壁からの距離 (最大)	A0	1.2	1.1	1.2	1.4	1.3	1.4	1.2									
	B0	1.0	1.1	1.1	1.0	1.2	1.2	1.2									