

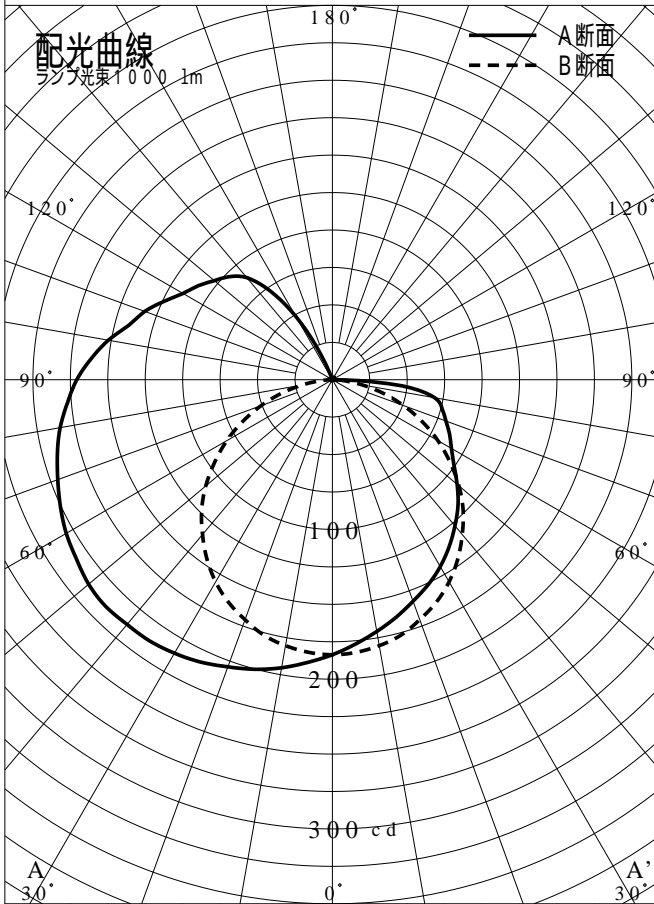


非常用照明器具特性

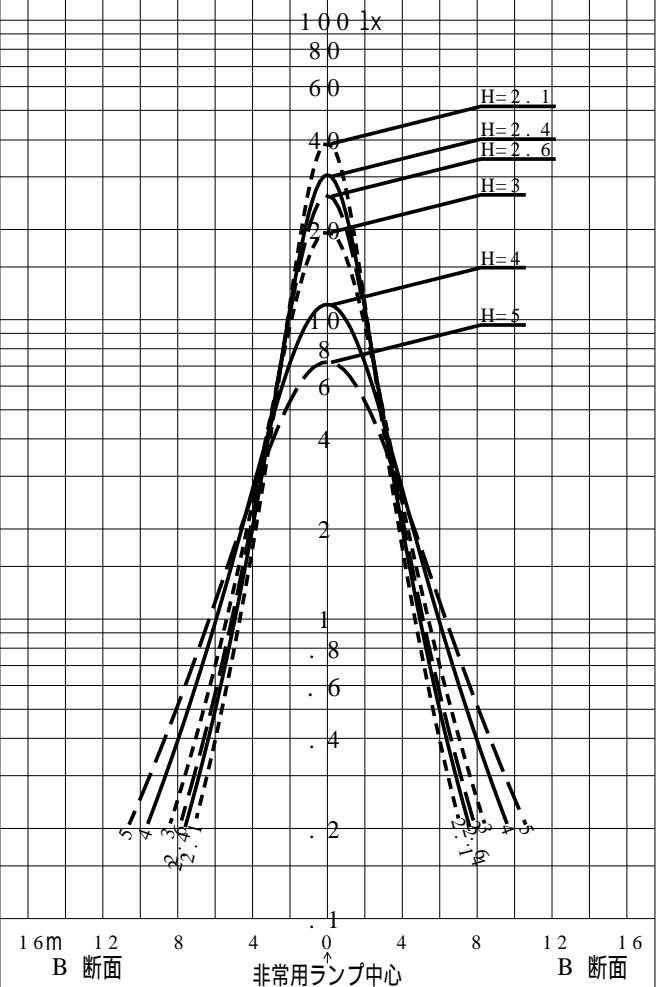

品番	NWF G4 2 0 0 2		
名称			
光源	LDL40S. N/ 19/ 25 - K(1400)		
管理番号	K0137526(1)DY1		
光束	14000lm x 1.00		
保守率	0.81		
適用品番	設計照度Eを得るための読取照度		
	E= 2.0	E= 1.0	E= 0.5
NWFG42002	1.8	0.9	0.4
備考	非常点灯時の照度 (30分後)		

直射水平面照度

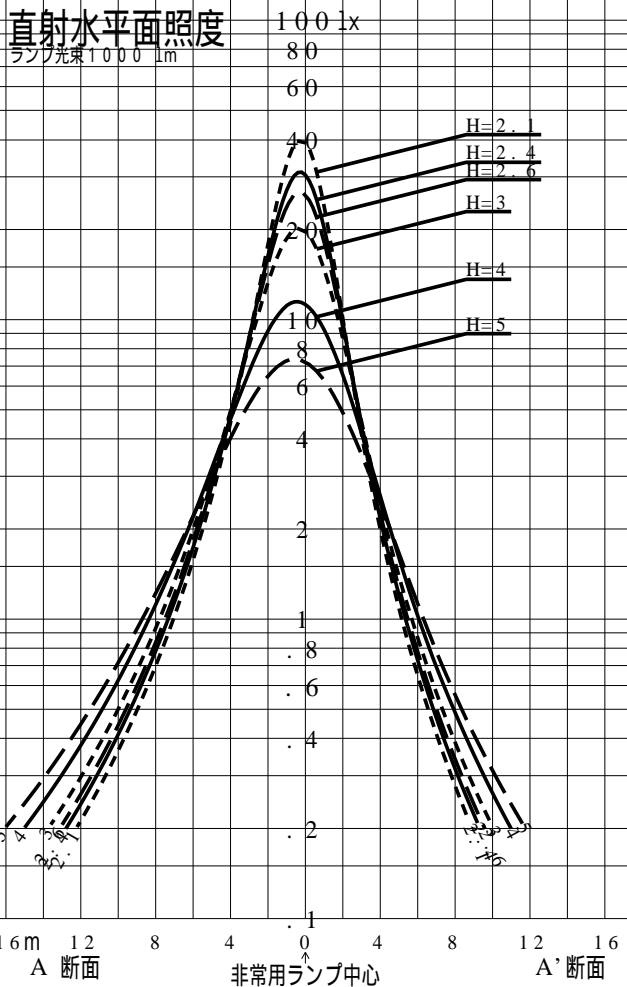

品番	NWF G4 2 0 0 2				
名称					
光源	LDL40S. N/ 19/ 25 - K(1400)				
管理番号	K0137526(1) DY 1				
光束	1400.0 l m * 1.00			備考	非常点灯時の照度 (30分後)
保守率	0.81				

非常灯配置表

器具取付高さ (m)		2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2	3.3	3.4	3.5	3.6
単体配置	A1	5.8	5.9	5.9	6.0	6.1	6.1	6.2	6.2	6.3	6.3	6.4	6.4	6.4	6.5	6.5	6.5
	A' 1	4.2	4.3	4.3	4.4	4.4	4.4	4.5	4.5	4.5	4.6	4.6	4.6	4.7	4.7	4.7	4.7
	B1	4.0	4.1	4.1	4.2	4.2	4.3	4.4	4.4	4.5	4.5	4.5	4.6	4.6	4.7	4.7	4.7
直線配置	A2	12.6	12.7	12.9	13.0	13.2	13.4	13.5	13.6	13.7	13.9	14.0	14.2	14.3	14.3	14.5	14.5
	B2	9.4	9.6	9.8	10.0	10.2	10.3	10.5	10.7	10.8	11.0	11.1	11.2	11.4	11.5	11.6	11.7
四角配置	A4	11.9	12.1	12.2	12.4	12.6	12.6	12.7	12.9	12.9	13.1	13.2	13.2	13.4	13.6	13.6	13.7
	B4	9.3	9.4	9.6	9.7	9.8	10.1	10.2	10.3	10.5	10.6	10.8	11.0	11.0	11.1	11.3	11.4
壁からの距離 (最大)	A0	1.4	1.4	1.5	1.7	1.6	1.6	1.5	1.6	1.5	1.6	1.7	1.6	1.6	1.8	1.7	1.6
	B0	2.1	2.1	2.1	2.0	2.1	2.2	2.2	2.3	2.3	2.3	2.3	2.4	2.4	2.4	2.4	2.5

器具取付高さ (m)		3.7	3.8	3.9	4.0	4.1	4.2	4.3	4.4	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
単体配置	A1	6.6	6.6	6.6	6.7	6.7	6.7	6.7	6.7	6.7	6.8	6.8	6.7	6.6	6.4	6.1	5.8
	A' 1	4.8	4.8	4.8	4.8	4.8	4.8	4.9	4.9	4.9	4.9	4.8	4.7	4.6	4.4	4.1	3.7
	B1	4.8	4.8	4.8	4.8	4.9	4.9	4.9	4.9	4.9	5.0	5.0	4.9	4.8	4.6	4.4	4.1
直線配置	A2	14.7	14.7	14.9	15.0	15.0	15.2	15.2	15.3	15.4	15.7	15.9	16.1	16.2	16.2	16.1	16.1
	B2	11.8	11.9	12.0	12.1	12.2	12.3	12.4	12.5	12.6	13.0	13.3	13.5	13.6	13.7	13.7	13.6
四角配置	A4	13.8	13.8	14.0	14.1	14.2	14.3	14.4	14.4	14.5	14.9	15.2	15.5	15.8	16.0	16.1	16.1
	B4	11.5	11.6	11.7	11.8	11.9	12.0	12.1	12.2	12.3	12.7	13.1	13.4	13.6	13.7	13.7	13.6
壁からの距離 (最大)	A0	1.8	1.6	1.8	1.8	1.8	1.8	1.8	1.6	1.7	1.5	1.5	1.1	1.0	1.1	1.1	1.1
	B0	2.4	2.5	2.4	2.5	2.4	2.5	2.5	2.5	2.4	2.5	2.3	2.1	2.0	1.6	1.3	1.2

器具取付高さ (m)		8.5	9.0	9.5	10.0												
単体配置	A1	5.4	4.9	4.2	---												
	A' 1	3.2	2.7	1.9	---												
	B1	3.7	3.2	2.5	---												
直線配置	A2	15.9	15.6	15.2	14.8												
	B2	13.4	13.2	12.9	12.5												
四角配置	A4	15.9	15.6	15.2	14.8												
	B4	13.4	13.2	12.9	12.5												
壁からの距離 (最大)	A0	1.0	1.0	1.0	1.0												
	B0	1.2	1.3	1.4	1.0												